

9-29-00

A



Practitioner's Docket No. 789_048 NP

PATENT

NEW APPLICATION TRANSMITTAL

Box Patent Application
 Assistant Commissioner for Patents
 Washington D.C. 20231

I hereby certify that this paper is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 addressed to **Box Patent Application, Assistant Commissioner for Patents, Washington, D.C. 20231** on September 28, 2000 under "EXPRESS MAIL" mailing label number **EL692672735US**.

Elizabeth A. VanAntwerp
 Elizabeth A. VanAntwerp



Transmitted herewith for filing is the patent application of:

Inventor 1: Yukihiisa TAKEUCHI
 Address: c/o NGK Insulators, Ltd.
 2-56, Suda-Cho, Mizuho-Ku
 Nagoya-City, Aichi-Prefecture 467-8530
 Japan

Inventor 2: Kazuyoshi SHIBATA
 Address: c/o NGK Insulators, Ltd.
 2-56, Suda-Cho, Mizuho-Ku
 Nagoya-City, Aichi-Prefecture 467-8530
 Japan

Inventor 3: Masahiko NAMERIKAWA
 Address: c/o NGK Insulators, Ltd.
 2-56, Suda-Cho, Mizuho-Ku
 Nagoya-City, Aichi-Prefecture 467-8530
 Japan

Title: PIEZOELECTRIC/ELECTROSTRICTIVE DEVICE AND METHOD OF
 MANUFACTURING SAME

1. Papers enclosed

A. Required for filing date under 37 CFR 1.53(b) (Regular) are:

103 Page(s) of Specification
19 Page(s) of Claims
1 Page(s) of Abstract
53 Sheets of Formal Drawings (Figs. 1-53)

B. Other Papers Enclosed

☐ A Preliminary Amendment
☒ An Information Disclosure Statement and Identification of Copending Applications
☒ PTO Form-1449

2. Additional Papers to Follow Under Separate Cover

☒ A combined Declaration and Power of Attorney
☒ An Assignment Transmittal and Assignment of the invention to
NGK Insulators, Ltd.

09/28/00 09/28/00

3. Relate Back

A. 35 U.S.C. 119(e)

☒ Priority of provisional application Serial No. 60/204,702, filed May 16, 2000, is hereby claimed under 35 U.S.C. §119(e).

B. 35 U.S.C. 120, 121 and 365(c)

☒ Priority of U.S. Patent Application Serial No. 09/524,042, filed March 13, 2000, is hereby claimed under 35 U.S.C. §120.

C. 35 U.S.C. 119 Priority Claim for Prior Application

☒ Priority of foreign application(s) is hereby claimed under 35 U.S.C. §119 as follows:

Japanese Application 11-281522 filed October 1, 1999;
 Japanese Application 11-307844 filed October 28, 1999;
 Japanese Application 11-326195 filed November 16, 1999;
 Japanese Application 11-371967 filed December 27, 1999;
 Japanese Application 2000-013576 filed January 21, 2000;
 Japanese Application 2000-015123 filed January 24, 2000;
 Japanese Application 2000-056434 filed March 1, 2000; and
 Japanese Application 2000-133012 filed May 1, 2000.

☒ Certified copies of the above corresponding foreign applications are filed herewith.

4. ☒ Amend the specification by inserting after the title and before the first line the sentence:

--Cross Reference to Related Applications

Reference is made to and priority is claimed from U.S. Provisional Application Serial No. 60/204,702 filed May 16, 2000 and U.S. Patent Application Serial No. 09/524,042 filed March 13, 2000.--

5. Small Entity Status

☐ A statement that this filing is by a small entity is attached.

☐ A separate refund request accompanies this paper.

☐ was filed on _____ (original).

008260" 69027960


5. The filing fee has been calculated as shown below:

A.	Filing Fee	
	<input checked="" type="checkbox"/> Original Patent Application	\$ <u>690.00</u>
	<small>(37 C.F.R. 1.16(a) --\$690.00; Small Entity--\$345.00)</small>	
B.	Fees for Claims (67 Claims; 5 Indep.)	
	<input checked="" type="checkbox"/> each independent claim in excess of 3	\$ <u>156.00</u>
	<small>(37 C.F.R. 1.16(b)--\$78.00; small entity--\$39.00)</small>	
	<input checked="" type="checkbox"/> each claim in excess of 20	\$ <u>846.00</u>
	<small>(37 C.F.R. 1.16(c)--\$18.00; small entity--\$9.00)</small>	
	<input type="checkbox"/> multiple dependent claim(s)	\$ <u>.00</u>
	<small>(37 C.F.R. 1.16(d)--\$260.00 small entity--\$130.00)</small>	
C.	Surcharge fees	
	<input checked="" type="checkbox"/> late payment of filing fee	\$ <u>130.00</u>
	<small>(37 C.F.R. 1.16(e)--\$130.00, small entity--\$65.00)</small>	
	and/or	
	<input checked="" type="checkbox"/> late filing of original declaration or oath	\$ <u>.00</u>
	<small>(37 C.F.R. 1.16(e)--\$130.00; small entity--\$65.00)</small>	
	<small>NOTE: If both the filing fee and declaration or oath were missing from the original papers, only one surcharge fee for both need be paid. 37 C.F.R. 1.16(e)</small>	
D.	<input checked="" type="checkbox"/> Assignment Fee	\$ <u>40.00</u>
	Total Fees Due	\$ 1,862.00

6. Payment of Fees and Authorization to Charge Additional Fees or Credit Overpayment

- ☐ A check in the amount of _____ is enclosed.
- ☐ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 50-1446. A duplicate copy of this sheet is enclosed.
- ☐ Any additional filing fees required under 37 CFR 1.16.
- ☐ Any patent application processing fees under 37 CFR 1.17.

Respectfully submitted,


 Stephen P. Burr
 Reg. No. 32,970

September 28, 2000
 Date

SPB/eav

BURR & BROWN
 P.O. Box 7068
 Syracuse, NY 13261-7068

Customer No.: 025191
 Telephone:(315) 233-8300
 Facsimile:(315) 233-8320

008260" 59227560

PIEZOELECTRIC/ELECTROSTRICTIVE DEVICE AND
METHOD OF MANUFACTURING SAME

BACKGROUND OF THE INVENTION

Field of the Invention:

The present invention relates to a piezoelectric /electrostrictive device which is provided with a movable section to be operated on the basis of a displacement action of a piezoelectric/electrostrictive element, or a piezoelectric/electrostrictive device which is capable of detecting displacement of a movable section by the aid of a piezoelectric/electrostrictive element, and a method for producing the same. In particular, the present invention relates to a piezoelectric/electrostrictive device which is excellent in strength, shock resistance, and moisture resistance and which makes it possible to efficiently operate a movable section to a great extent, and a method for producing the same.

Description of the Related Art:

Recently, a displacement element, which makes it possible to adjust the optical path length and the position in an order of submicron, is required, for example, in the fields of the optical science, the magnetic recording, and the precision machining. Development is advanced for the displacement element based on the use of the displacement brought about by the inverse piezoelectric effect or the electrostrictive effect caused when a voltage is applied to

a piezoelectric/electrostrictive material (for example, a ferroelectric material).

As shown in FIG. 53, for example, those hitherto disclosed as such a displacement element include a piezoelectric actuator comprising a fixation section 404, a movable section 406, and a beam section 408 for supporting them which are formed in an integrated manner with a hole 402 provided through a plate-shaped member 400 composed of a piezoelectric/electrostrictive material and with an electrode layer 410 provided on the beam section 408 (see, for example, Japanese Laid-Open Patent Publication No. 10-136665).

The piezoelectric actuator is operated such that when a voltage is applied to the electrode layer 410, the beam section 408 makes extension and contraction in a direction along a line obtained by connecting the fixation section 404 and the movable section 406 in accordance with the inverse piezoelectric effect or the electrostrictive effect. Therefore, the movable section 406 can perform circular arc-shaped displacement or rotational displacement in the plane of the plate-shaped member 400.

On the other hand, Japanese Laid-Open Patent Publication No. 63-64640 discloses a technique in relation to an actuator based on the use of a bimorph. In this technique, electrodes for the bimorph are provided in a divided manner. The divided electrodes are selectively driven, and thus the highly accurate positioning is

performed at a high speed. This patent document (especially in FIG. 4) discloses a structure in which, for example, two bimorphs are used in an opposed manner.

However, the piezoelectric actuator described above involves such a problem that the amount of operation of the movable section 406 is small, because the displacement in the direction of extension and contraction of the piezoelectric/electrostrictive material (i.e., in the in-plane direction of the plate-shaped member 400) is transmitted to the movable section 406 as it is.

All of the parts of the piezoelectric actuator are made of the piezoelectric/electrostrictive material which is a fragile material having a relatively heavy weight. Therefore, the following problems arise. That is, the mechanical strength is low, and the piezoelectric actuator is inferior in handling performance, shock resistance, and moisture resistance. Further, the piezoelectric actuator itself is heavy, and its operation tends to be affected by harmful vibrations (for example, residual vibration and noise vibration during high speed operation).

In order to solve the problems described above, it has been suggested that the hole 402 is filled with a filler material having flexibility. However, it is clear that the amount of displacement, which is brought about by the inverse piezoelectric effect or the electrostrictive effect, is decreased even when the filler material is merely used.

SUMMARY OF THE INVENTION

5 The present invention has been made taking the foregoing problems into consideration, an object of which is to provide a piezoelectric/electrostrictive device and a method for producing the same which make it possible to obtain a displacement element that is scarcely affected by harmful vibration and capable of high speed response with high mechanical strength while being excellent in handling performance, shock resistance, and moisture resistance, making it possible to realize a long life time of a device, and improve the handling performance of the device and the attachment performance for parts to be attached to the movable section or the fixation performance of the device, so that the movable section may be greatly displaced at a relatively low voltage, and it is possible to achieve a high speed of the displacement action of the device, especially of the movable section (realization of a high resonance frequency), as well as a sensor element which makes it possible to accurately detect vibration of the movable section.

20 According to the present invention, there is provided a piezoelectric/electrostrictive device comprising at least an actuator section including a stacked type piezoelectric /electrostrictive element secured onto a thin plate section made of metal with an adhesive intervening therebetween; wherein an actuator film of the stacked type piezoelectric/electrostrictive element, which is composed of

piezoelectric/electrostrictive layers and electrode films,
is constructed by a multilayered member including at least
three layers or more.

Accordingly, the thin plate section can be displaced to
a great extent even when the areal size of the stacked type
piezoelectric/electrostrictive element is not widened on the
plane. Further, the piezoelectric/electrostrictive device
is excellent in strength and toughness, because the thin
plate section is made of metal. Further, it is possible to
correspond to the quick displacement action.

In other words, according to the present invention, it
is possible to sufficiently respond to any variation of the
environment of use and any severe state of use. The
piezoelectric/electrostrictive device is excellent in shock
resistance, and it is possible to realize a long life time
of the piezoelectric/electrostrictive device and improve the
handling performance of the piezoelectric /electrostrictive
device. Further, the thin plate section can be greatly
displaced at a relatively low voltage. The rigidity of the
thin plate section is high, the film thickness of the
actuator film is thick, and the rigidity thereof is high.
Therefore, it is possible to achieve a high speed of the
displacement action of the thin plate section (realize a
high resonance frequency).

It is preferable that the plurality of electrode films,
which are included in the multilayered member for
constructing the piezoelectric/electrostrictive element, are

stacked to have alternate end surfaces, and they are connected so that an identical voltage is applied to every other layer. It is preferable that the actuator film is composed of the multilayered member having ten layers or less. It is preferable that the actuator film is formed by means of a multilayer printing method. Further, it is preferable that a positional discrepancy in an in-plane direction, which possibly occurs on a perpendicular projection plane of each of the electrode films disposed as every other layer, is not more than 50 μm . It is preferable that the adhesive has a thickness of not more than 15 μm .

In the present invention, it is also preferable that an underlying layer is formed on a surface of the piezoelectric/electrostrictive element opposed to the thin plate section. It is also preferable that one or more holes or recesses are formed at least at a portion of the thin plate section at which the piezoelectric/electrostrictive element is formed. In this arrangement, the adhesive enters the interior of the hole or the recess, and hence the adhesion area is substantially increased. Further, it is possible to achieve a thin thickness of the adhesive. It is also preferable that at least a portion of a surface of the thin plate section, on which the piezoelectric/electrostrictive element is formed, is a rough surface. In this arrangement, the adhesion area is substantially increased, and hence the adhesion can be tightly effected.

According to another aspect of the present invention, there is provided a piezoelectric/electrostrictive device comprising a pair of mutually opposing thin plate sections made of metal and a fixation section for supporting the thin plate sections, and including an actuator section with a stacked type piezoelectric/electrostrictive element fixed on at least one of the thin plate sections by the aid of an adhesive; wherein the stacked type piezoelectric/electrostrictive element is composed of a plurality of piezoelectric/electrostrictive layers and electrode films; and the electrode films, which contact with upper and lower surfaces of the respective piezoelectric/electrostrictive layers, are alternately led to opposite end surfaces, and end surface electrodes, which electrically connect the respective electrode films alternately led to the opposite end surfaces, are electrically connected to terminals which are provided on a surface of an outermost layer of the piezoelectric/electrostrictive layer and which are arranged while being separated from each other by a predetermined distance respectively. Accordingly, the driving signal can be easily supplied, and the detection signal can be easily obtained with respect to the stacked piezoelectric/electrostrictive element. It is possible to realize the formation of the stacked type piezoelectric/electrostrictive element on the thin plate section.

In the invention described above, it is also preferable that the stacked type piezoelectric/electrostrictive element has a substantially rectangular parallelepiped-shaped configuration. It is preferable that the predetermined distance between the terminals is not less than 50 μm . It is also preferable that at least one of the terminals and one of the end surface electrodes are electrically connected with each other with an electrode film having a film thickness which is thinner than those of the terminal and the end surface electrode.

According to still another aspect of the present invention, there is provided a piezoelectric/electrostrictive device comprising a pair of mutually opposing thin plate sections, and a fixation section for supporting the thin plate sections; and one or more piezoelectric/electrostrictive elements arranged on at least one thin plate section of the pair of thin plate sections; wherein a minimum resonance frequency of the device structure, which is obtained when an object member having a size substantially equivalent to that of the fixation section exists between open ends of the pair of thin plate sections, is not less than 20 kHz, and a relative displacement amount between the object member and the fixation section is not less than 0.5 μm at a substantial applied voltage of 30 V at a frequency which is not more than 1/4 of the resonance frequency.

Accordingly, it is possible to greatly displace the

pair of thin plate sections. Further, it is possible to achieve realization of a high speed (realization of a high resonance frequency) for the displacement action of the device, especially of the pair of thin plate sections.

5 Furthermore, it is possible to obtain a displacement element which is scarcely affected by harmful vibration, which is capable of performing high speed response, which has high mechanical strength, and which is excellent in handling performance, shock resistance, and moisture resistance.

Moreover, it is possible to obtain a sensor element which makes it possible to accurately detect the vibration of the movable section.

At least the thin plate section and the fixation section may be constructed by using ceramics or metal. The respective components may be constructed with ceramic materials, or they may be constructed with metal materials. Further, the respective components may be constructed as a hybrid structure obtained by combining those produced from ceramic and metal materials.

20 It is preferable that when an adhesive intervenes between the piezoelectric/electrostrictive element and the thin plate section, the adhesive has a thickness which is not more than 10 % of a thickness of the piezoelectric /electrostrictive element. It is preferable that when one
25 or more piezoelectric/electrostrictive elements are arranged on one thin plate section of the pair of thin plate sections, a thickness of the one thin plate section is

thicker than a thickness of the other thin plate section.

It is preferable that when the object member intervenes between the open ends of the pair of thin plate sections, then a distance concerning the pair of thin plate sections between a boundary portion with respect to the object member and a boundary portion with respect to the fixation section is not less than 0.4 mm and not more than 2 mm, and each of the pair of thin plate sections has a thickness which is not less than 10 μm and not more than 100 μm .

It is preferable that the piezoelectric/electrostrictive element is constructed by multilayered member including at least three or more actuator films, which is composed of piezoelectric/electrostrictive layers and electrode films. In this arrangement, it is preferable that the actuator film is composed of the multilayered member having ten layers or less. Further, it is preferable that the piezoelectric/electrostrictive layer has a thickness which is not less than 5 μm and not more than 30 μm . It is preferable that the electrode film has a thickness which is not less than 0.5 μm and not more than 20 μm .

It is preferable that the plurality of electrode films, which are included in the multilayered member for constructing the piezoelectric/electrostrictive element, are stacked alternately, and they are connected so that an identical voltage is applied to every other layer.

Especially, when the thin plate section is made of

metal, the piezoelectric/electrostrictive element is formed such that only the piezoelectric/electrostrictive layer of the first layer, or the electrode film of the first layer and the piezoelectric/electrostrictive layer of the first layer, of the multilayered member for constructing the piezoelectric/electrostrictive element make contact with the thin plate section. By doing so, it is possible to avoid the phenomenon of short circuit formation between the different electrodes.

It is also preferable that one of ends of the electrode layer is formed at a position not including at least the fixation section as viewed in plan view. It is also preferable that an end of the multilayered member for constructing the piezoelectric/electrostrictive element is formed at a position not including at least the fixation section as viewed in plan view.

It is preferable that $(1 - L_b/L_a)$ is not less than 0.4, provided that L_a represents a shortest distance concerning the pair of thin plate sections between a boundary portion with respect to the object member and a boundary portion with respect to the fixation section, and L_b represents a shortest distance of distances from the boundary portion between the thin plate section and one of the object member and the fixation section on which the multilayered member for constructing the piezoelectric/electrostrictive element is not formed, to an end of the electrode film. More preferably $(1 - L_b/L_a)$ is 0.5 to 0.8.

It is preferable that when the thin plate section is made of metal, the thin plate section is composed of a metal plate subjected to a cold rolling process.

It is also preferable that an adhesive, which has a thickness of not less than 0.1 μm and not more than 30 μm , is allowed to intervene between the thin plate section and the multilayered member for constructing the piezoelectric/electrostrictive element. In this arrangement, the adhesive may be organic resin, or the adhesive may be glass, brazing material, or solder.

It is also preferable that an underlying layer is formed on a surface of the multilayered member opposed to the thin plate section. It is also preferable that one or more holes or recesses are formed at least at a portion of the thin plate section at which the multilayered member is formed. In this arrangement, the adhesive enters the inside of the hole and the recess, and hence the adhesion area is substantially increased. Further, it is possible to use a thin thickness of the adhesive. It is also preferable that at least a portion of a surface of the thin plate section, on which the multilayered member is formed, is a rough surface. In this arrangement, the adhesion area is substantially increased, and hence the adhesion can be tightly effected. It is preferable that an adhesive, which has a thickness of not less than 0.1 μm and not more than 30 μm , is allowed to intervene between the thin plate section and at least the fixation section. In this arrangement, the

adhesive may be organic resin, or the adhesive may be glass, brazing material, or solder.

It is preferable that a stick-out shape of the adhesive, which protrudes from an opposing portion between the thin plate section and at least the fixation section, has a curvature. In this arrangement, the inner wall of the fixation section and the inner wall of each of the thin plate sections are used as the adhesion surface. Therefore, the adhesion area is increased, and it is possible to increase the adhesion strength. Further, the concentration of the stress, which would be otherwise caused on the joined portion (angular portion) between the inner wall of the fixation section and the inner wall of each of the thin plate sections, can be effectively dispersed.

It is preferable that when an object member intervenes between open ends of the pair of thin plate sections, at least an angular portion of the fixation section opposed to the object member is chamfered. In this arrangement, the stick-out amount of the adhesive can be stabilized by appropriately adjusting the chamfering angle and the radius of curvature. Further, it is possible to suppress the local dispersion of the adhesion strength. Thus, it is possible to improve the yield. It is preferable that when the thin plate section is manufactured by means of stamping for a metal plate, a burr, which is brought about by the stamping, is directed outwardly, considering the handling performance and the direction of adhesion of the respective members.

According to still another aspect of the present invention, there is provided a method for producing a piezoelectric/electrostrictive device comprising a pair of mutually opposing thin plate sections, and a fixation section for supporting the thin plate sections; and one or more piezoelectric/electrostrictive elements arranged on at least one thin plate section of the pair of thin plate sections; the method comprising the steps of preparing a plurality of thin plates for forming at least the thin plate sections thereafter, the piezoelectric/electrostrictive element, and a support substrate; securing the piezoelectric /electrostrictive element to at least one of the thin plates by the aid of a first adhesive; securing the plurality of thin plates to the support substrate by the aid of a second adhesive to manufacture a master device block including the plurality of thin plates disposed opposingly; and dividing the master device block into a plurality of chips to manufacture individuals of the piezoelectric/electrostrictive devices.

According to still another aspect of the present invention, there is provided a method for producing a piezoelectric/electrostrictive device comprising a pair of mutually opposing thin plate sections, and a fixation section for supporting the thin plate sections; and one or more piezoelectric/electrostrictive elements arranged on at least one thin plate section of the pair of thin plate sections; the method comprising the steps of preparing a

plurality of thin plates for forming at least the thin plate sections thereafter, the piezoelectric/electrostrictive element, and a support substrate; securing the plurality of thin plates to the support substrate by the aid of a second adhesive to manufacture a master device block including the plurality of thin plates disposed opposingly; securing the piezoelectric/electrostrictive element to at least one of the thin plates by the aid of a first adhesive; and dividing the master device block into a plurality of chips to manufacture individuals of the piezoelectric/electrostrictive devices.

According to the production methods as described above, it is possible to easily produce the piezoelectric /electrostrictive device in which the pair of thin plate sections can be greatly displaced, and it is possible to achieve realization of the high speed (realization of the high resonance frequency) of the device, especially of the displacement action of the pair of thin plate sections.

It is also preferable in the production method described above that when an object member intervenes between open ends of the pair of thin plate sections of the piezoelectric/electrostrictive device to be produced; the support substrate is a rectangular annular structure having a portion to be formed into at least the object member thereafter, and a portion to be formed into the fixation section thereafter.

Alternatively, it is also preferable in the production

method described above that when an object member does not intervene between open ends of the pair of thin plate sections of the piezoelectric/electrostrictive device to be produced; the support substrate is a rectangular annular structure having a portion for supporting the open ends (portion to substantially define the thickness of a portion for allowing at least the object member to intervene thereafter), and a portion to be formed into the fixation section thereafter.

The first adhesive and/or the second adhesive may be organic resin, or the first adhesive and/or the second adhesive may be glass, brazing material, or solder. On the other hand, the thin plates and/or the support substrate may be made of metal.

It is preferable that when the step of dividing the master device block includes a treatment for cutting the master device block along predetermined cutting lines; the cutting is performed in substantially the same direction as a displacement direction of the pair of thin plate sections.

Further, it is also preferable that the production method according to the present invention further comprises the step of forming an underlying layer on a surface of the piezoelectric/electrostrictive element opposed to the thin plate before securing the piezoelectric/electrostrictive element to the thin plate by the aid of the first adhesive. It is also preferable that the production method according to the present invention further comprises the step of

forming one or more holes or recesses at least at a portion of the thin plate to which the piezoelectric/electrostrictive element is secured.

5 It is also preferable that at least a portion of a surface of the thin plate, to which the piezoelectric/electrostrictive element is secured, is roughened. It is also preferable to form a curvature for a stick-out shape of the second adhesive protruding from an opposing portion between the thin plate and the support substrate.

10 It is also preferable to chamfer mutually opposing angular portions of the support substrate of the master device block. It is also preferable that the method further comprises the step of manufacturing the thin plate by means of stamping for a metal plate; wherein when the master device block is produced by combining the thin plate with the support substrate, a burr, which is brought about on the thin plate due to the stamping, is directed outwardly to produce the master device block.

15 20 Therefore, the piezoelectric/electrostrictive device according to the present invention can be utilized as the active device including, for example, various transducers, various actuators, frequency region functional parts (filters), transformers, vibrators, resonators, oscillators, 25 and discriminators for the communication and the power generation, as well as the sensor element for various sensors including, for example, ultrasonic sensors,

acceleration sensors, angular velocity sensors, shock sensors, and mass sensors. Especially, the piezoelectric/electrostrictive device according to the present invention can be preferably utilized for various actuators to be used for the mechanism for adjusting the displacement and the positioning and for adjusting the angle for various precision parts such as those of optical instruments and precision mechanical equipments.

The above and other objects, features, and advantages of the present invention will become more apparent from the following description when taken in conjunction with the accompanying drawings in which a preferred embodiment of the present invention is shown by way of illustrative example.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 shows a perspective view illustrating an arrangement of a piezoelectric/electrostrictive device according to a first embodiment;

FIG. 2 shows a perspective view illustrating a first modified embodiment of the piezoelectric/electrostrictive device according to the first embodiment;

FIG. 3 shows a perspective view illustrating a second modified embodiment of the piezoelectric/electrostrictive device according to the first embodiment;

FIG. 4 shows a perspective view illustrating a third modified embodiment of the piezoelectric/electrostrictive device according to the first embodiment;

FIG. 5 shows a perspective view illustrating a fourth modified embodiment of the piezoelectric/electrostrictive device according to the first embodiment;

FIG. 6 shows a perspective view illustrating a fifth modified embodiment of the piezoelectric/electrostrictive device according to the first embodiment;

FIG. 7 shows a perspective view illustrating another embodiment of the piezoelectric/electrostrictive device concerning the fifth modified embodiment;

FIG. 8 shows a perspective view illustrating a sixth modified embodiment of the piezoelectric/electrostrictive device according to the first embodiment;

FIG. 9 shows a perspective view illustrating a seventh modified embodiment of the piezoelectric/electrostrictive device according to the first embodiment;

FIG. 10 shows, with partial omission, another embodiment of the piezoelectric/electrostrictive element;

FIG. 11 shows, with partial omission, still another embodiment of the piezoelectric/electrostrictive element;

FIG. 12 illustrates a situation in which both of the piezoelectric/electrostrictive elements do not make the displacement action in the piezoelectric/electrostrictive device according to the first embodiment;

FIG. 13A shows a waveform illustrating a voltage waveform to be applied to the first piezoelectric /electrostrictive element;

FIG. 13B shows a waveform illustrating a voltage

waveform to be applied to the second piezoelectric
/electrostrictive element;

FIG. 14 illustrates a situation in which the
piezoelectric/electrostrictive element makes the
displacement action in the piezoelectric/electrostrictive
device according to the first embodiment;

FIG. 15 shows a perspective view illustrating an
arrangement in which a second piezoelectric/electrostrictive
device is secured to a movable section of a first
piezoelectric/electrostrictive device;

FIG. 16A illustrates a process for stacking necessary
ceramic green sheets in a first production method;

FIG. 16B illustrates a state in which a ceramic green
stack is formed;

FIG. 17A illustrates a state in which the ceramic green
stack is sintered to provide a ceramic stack;

FIG. 17B illustrates a state in which
piezoelectric/electrostrictive elements, which are
constructed as separate members, are glued to the surfaces
of metal plates to serve as thin plate sections
respectively;

FIG. 18 illustrates a state in the first production
method in which the metal plate is glued to the ceramic
stack to provide a hybrid stack;

FIG. 19 illustrates a state in which the hybrid stack
is cut along predetermined cutting lines to provide the
piezoelectric/electrostrictive device according to the first

embodiment;

FIG. 20A illustrates a process for stacking necessary ceramic green sheets in a second production method;

FIG. 20B illustrates a state in which a ceramic green stack is formed;

FIG. 21A illustrates a state in which the ceramic green stack is sintered to provide a ceramic stack, and then a hole is filled with a filler material;

FIG. 21B illustrates a state in which metal plates to serve as thin plate sections respectively are glued to the ceramic stack to provide a hybrid stack;

FIG. 22 illustrates a state in which piezoelectric /electrostrictive elements, which are constructed as separate members, are glued to the surfaces of the metal plates of the hybrid stack;

FIG. 23 illustrates a state in which the piezoelectric/electrostrictive device according to the first embodiment is produced by cutting the hybrid stack along predetermined cutting lines;

FIG. 24 shows a perspective view illustrating an arrangement of a piezoelectric/electrostrictive device according to a second embodiment;

FIG. 25 shows a perspective view illustrating another arrangement of the piezoelectric/electrostrictive device according to the second embodiment;

FIG. 26 shows a magnified view illustrating an exemplary arrangement of a stacked type piezoelectric

/electrostrictive element;

FIG. 27 shows a magnified view illustrating a preferred exemplary arrangement of the stacked type piezoelectric /electrostrictive element shown in FIG. 26;

5 FIG. 28 shows a magnified view illustrating another exemplary arrangement of a stacked type piezoelectric /electrostrictive element;

FIG. 29 shows a magnified view illustrating a preferred exemplary arrangement of the stacked type piezoelectric /electrostrictive element shown in FIG. 28;

FIG. 30 shows a perspective view illustrating still another arrangement of the piezoelectric/electrostrictive device according to the second embodiment;

FIG. 31 illustrates the preferred dimensional relationship concerning the piezoelectric/electrostrictive device according to the second embodiment;

FIG. 32 illustrates a state in a third production method in which a rectangular hole is bored through a central portion of a stainless steel plate to manufacture a substrate having a rectangular annular structure;

FIG. 33 illustrates a state in which an adhesive is formed on the first stainless steel thin plate;

FIG. 34 illustrates a state in which the stacked type piezoelectric/electrostrictive element is glued to the first stainless steel thin plate with the adhesive intervening therebetween;

FIG. 35 illustrates a state in which the first and

second stainless steel thin plates are glued to the substrate by the aid of the adhesive;

FIG. 36 illustrates a state in which a manufactured master device block is cut;

5 FIG. 37 illustrates a state in a fourth production method in which a rectangular hole is bored through a central portion of a stainless steel plate to manufacture a substrate having a rectangular annular structure, and first and second stainless steel thin plates are glued to the substrate by the aid of an adhesive;

FIG. 38 illustrates a state in which the first and second stainless steel thin plates are glued by the aid of the adhesive;

FIG. 39 illustrates a state in which the adhesive is formed on the first stainless steel thin plate;

FIG. 40 illustrates a state in which a stacked type piezoelectric/electrostrictive element is glued to the first stainless steel thin plate by the aid of the adhesive;

FIG. 41 illustrates a state in which first and second stainless steel thin plates are glued to another exemplary substrate by the aid of an adhesive;

FIG. 42 illustrates an example in which bumps are provided at portions of respective stainless steel thin plates to which a support section to be formed into a movable section thereafter and a support section to be formed into a fixation section thereafter are glued respectively;

FIG. 43 illustrates an example in which bumps are provided at portions of respective stainless steel thin plates to which a support section to be formed into a fixation section thereafter is glued;

5 FIG. 44 illustrates an example in which no bump is provided on respective stainless steel thin plates;

FIG. 45 illustrates an example in which projections for forming compartments for gluing are provided at portions of respective stainless steel thin plates to which a support section to be formed into a movable section thereafter and a support section to be formed into a fixation section thereafter are glued respectively;

FIG. 46 illustrates a case concerning the example shown in FIG. 42, in which the size of the support section to be formed into the fixation section, especially the areal size of the surface of the stainless steel thin plate opposed to the bump is larger than the areal size of the bump;

FIG. 47 illustrates a first technique (to define holes through a stainless steel thin plate);

20 FIG. 48 illustrates a second technique (to roughen the surfaces of a stainless steel thin plate and a stacked type piezoelectric/electrostrictive element);

FIG. 49 illustrates a third technique (to provide a curvature for stick-out portions of an adhesive);

25 FIG. 50 illustrates a fourth technique (to chamfer angular portions of respective support sections);

FIG. 51 illustrates a fifth technique (to direct burrs

outwardly);

FIG. 52 illustrates a sixth technique (to change the thickness for respective stainless steel thin plates); and

FIG. 53 shows an arrangement of a piezoelectric/electrostrictive device concerning an illustrative conventional technique.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Explanation will be made below with reference to FIGS. 1 to 52 for illustrative embodiments of the piezoelectric /electrostrictive device and the production method for the same according to the present invention.

It is noted that the piezoelectric/electrostrictive device resides in a concept which includes the element for mutually converting the electric energy and the mechanical energy by the aid of the piezoelectric/electrostrictive element. Therefore, the piezoelectric/electrostrictive device is most preferably used as the active element such as various actuators and vibrators, especially as the displacement element based on the use of the displacement brought about by the inverse piezoelectric effect or the electrostrictive effect. Additionally, the piezoelectric/electrostrictive device is also preferably used as the passive element such as acceleration sensor elements and shock sensor elements.

As shown in FIG. 1, the piezoelectric/electrostrictive device 10A according to the first embodiment has a substrate

14 which has a lengthy rectangular parallelepiped-shaped configuration as a whole and which has a hole 12 provided at an approximately central portion in the major axis direction thereof.

5 The substrate 14 comprises a pair of mutually opposing thin plate sections 16a, 16b, a movable section 20, and a fixation section 22 for supporting the pair of thin plate sections 16a, 16b and the movable section 20. Piezoelectric/electrostrictive elements 24a, 24b are formed at respective parts of at least the thin plate sections 16a, 16b respectively.

10 The substrate 14 may be constructed by using ceramics or metal for the entire substrate 14. Alternatively, the substrate 14 may have a hybrid structure obtained by combining those produced with ceramic and metal materials. Further, those adoptable for constructing the substrate 14 include, for example, a structure in which respective parts are glued to one another with an adhesive such as organic resin and glass, and a metal integrated structure which is
15 integrated into one unit, for example, by means of brazing, soldering, eutectic bonding, or welding.

20 In the first embodiment, the substrate 14 has a hybrid structure in which the pair of thin plate sections 16a, 16b are made of metal, and the other parts, i.e., the movable
25 section 20 and the fixation section 22 are made of ceramics. Specifically, the thin plate sections 16a, 16b made of metal are secured by an adhesive 200 to respective side surfaces

of the movable section 20 and the fixation section 22 made of ceramics. It is a matter of course that all of the thin plate sections 16a, 16b, the movable section 20, and the fixation section 22 may be made of metal.

5 The piezoelectric/electrostrictive elements 24a, 24b are prepared as separate members as described later on, and the prepared piezoelectric/electrostrictive elements 24a, 24b are stuck to the substrate 14 with an adhesive such as organic resin or glass or by means of brazing, soldering, or eutectic bonding. Alternatively, the piezoelectric /electrostrictive elements 24a, 24b are directly formed on the substrate 14 by using the film formation method not by using the sticking method described above. In the first embodiment, the piezoelectric/electrostrictive elements 24a, 24b are secured onto the thin plate sections 16a, 16b by the aid of an adhesive 202 respectively.

10 The piezoelectric/electrostrictive device 10A includes the hole 12 having, for example, a rectangular configuration which is formed by both inner walls of the pair of thin
15 plate sections 16a, 16b, an inner wall 20a of the movable section 20, and an inner wall 22a of the fixation section 22. The piezoelectric/electrostrictive device 10A is constructed such that the movable section 20 is displaced in accordance with the driving of the piezoelectric
20 /electrostrictive element or elements 24a and/or 24b, or the displacement of the movable section 20 is detected by the piezoelectric/electrostrictive element or elements 24a
25

and/or 24b.

Each of the piezoelectric/electrostrictive elements 24a, 24b comprises a piezoelectric/electrostrictive layer 26, and a pair of electrodes 28, 30 formed on both sides of the piezoelectric/electrostrictive layer 26. One electrode 28 of the pair of electrodes 28, 30 is formed at least on each of the pair of thin plate sections 16a, 16b.

In the embodiment shown in FIG. 1, respective forward end surfaces of the pair of electrodes 28, 30 and the piezoelectric/electrostrictive layer 26 for constructing the piezoelectric/electrostrictive element 24a, 24b are substantially aligned. A substantial driving portion 18 of the piezoelectric/electrostrictive element 24a, 24b (portion at which the pair of electrodes 28, 30 are overlapped with each other with the piezoelectric/electrostrictive layer 26 interposed therebetween) is continuously formed over a range from a part of the outer circumferential surface of the fixation section 22 to a part of the outer circumferential surface of the thin plate section 16a, 16b. Especially, in this embodiment, the respective forward end surfaces of the pair of electrodes 28, 30 are located at the positions slightly deviated rearwardly from the inner wall 20a of the movable section 20. Of course, the piezoelectric /electrostrictive element 24a, 24b may be formed such that the substantial driving portion 18 is located over a range from a part of the movable section 20 to a part of the thin plate section 16a, 16b.

As shown in FIG. 1, the piezoelectric/electrostrictive device 10A according to the first embodiment described above includes mutually opposing end surfaces 36a, 36b which are formed in the movable section 20. Each of the end surfaces 36a, 36b is a surface substantially parallel to the side surface of the movable section 20, i.e., the surface for forming the element. The respective end surfaces 36a, 36b are separated from each other from the upper surface of the movable section 20 to the hole 12. In this arrangement, as shown in FIG. 12, for example, it is preferable that the distances D_a , D_b , which range from the central axis n of the movable section 20 to the respective end surfaces 36a, 36b, are substantially equal to one another.

As shown in FIG. 1, for example, a gap (air) 38 may be allowed to intervene between the end surfaces 36a, 36b. Alternatively, as in a piezoelectric/electrostrictive device 10Ag according to a seventh modified embodiment shown in FIG. 9 or as shown in FIG. 12, a member different from the constitutive member of the movable section 20, for example, a member 40 composed of, for example, resin or the like may be allowed to intervene between the end surfaces 36a, 36b.

In the piezoelectric/electrostrictive device 10A according to the first embodiment, the voltage is applied to the pair of electrodes 28, 30 via terminals (pads) 32, 34 of the respective electrodes 28, 30 formed on the both side surfaces (element formation surfaces) of the fixation section 22 respectively. The respective terminals 32, 34

are positioned as follows. That is, the terminal 32 corresponding to the first electrode 28 is formed at the position deviated toward the rearward end of the fixation section 22. The terminal 34 corresponding to the second electrode 30 disposed on the side of the external space is formed at the position deviated toward the inner wall 22a of the fixation section 22.

In this embodiment, the piezoelectric/electrostrictive device 10A can be individually fixed by utilizing the surfaces respectively different from the surfaces on which the terminals 32, 34 are arranged. As a result, it is possible to obtain the high reliability for both of the fixation of the piezoelectric/electrostrictive device 10A and the electric connection between the circuit and the terminals 32, 34. In this arrangement, the electric connection between the terminals 32, 34 and the circuit is made, for example, by means of the flexible printed circuit (also referred to as FPC), the flexible flat cable (also referred to as FFC), and the wire bonding.

Structures other than the structure shown in FIG. 1 are available to construct the piezoelectric/electrostrictive element 24a, 24b. That is, as in a piezoelectric /electrostrictive device 10Aa according to a first modified embodiment shown in FIG. 2, it is also preferable that the respective forward ends of the pair of electrodes 28, 30 for constructing the piezoelectric/electrostrictive element 24a, 24b are aligned, and only the forward end of the

piezoelectric/electrostrictive layer 26 is allowed to protrude toward the movable section 20. Alternatively, as in a piezoelectric/electrostrictive device 10Ab according to a second modified embodiment shown in FIG. 3, it is also preferable that the respective forward ends of the first electrode 28 and the piezoelectric/electrostrictive layer 26 are aligned, and only the forward end of the second electrode 30 is disposed at a position deviated toward the fixation section 22. The piezoelectric/electrostrictive device 10Ab shown in FIG. 3 is illustrative of the case in which mutually opposing end surfaces 36a, 36b are provided in the fixation section 22 in place of the movable section 20.

Alternatively, as in a piezoelectric/electrostrictive device 10Ac according to a third modified embodiment shown in FIG. 4, it is also preferable that the respective forward ends of the first electrode 28 and the piezoelectric/electrostrictive layer 26 are allowed to extend up to the side surface of the movable section 20, and the forward end of the second electrode 30 is located at an approximately central portion in the length direction (Z axis direction) of the thin plate section 16a, 16b.

In the embodiments described above, the piezoelectric /electrostrictive element 24a, 24b is constructed by the piezoelectric/electrostrictive layer 26 having the one-layered structure and the pair of electrodes 28, 30. Alternatively, it is also preferable that the

piezoelectric/electrostrictive element 24a, 24b is constructed in a stacked form composed of a plurality of units each comprising the piezoelectric/electrostrictive layer 26 and the pair of electrodes 28, 30.

5 For example, as in a piezoelectric/electrostrictive device 10Ad according to a fourth modified embodiment shown in FIG. 5, each of the piezoelectric/electrostrictive layer 26 and the pair of electrodes 28, 30 resides in a multilayered structure. The first electrodes 28 and the second electrodes 30 are alternately stacked with each other to provide the piezoelectric/electrostrictive element 24a, 24b which has a multiple stage structure at a portion (substantial driving portion 18) at which the first electrodes 28 and the second electrodes 30 are overlapped with each other with the piezoelectric/electrostrictive layer 26 interposed therebetween. FIG. 5 is illustrative of the following case. That is, the piezoelectric/electrostrictive layer 26 has the three-layered structure. The first electrodes 28 are formed in a separate manner respectively on the lower surface of the first layer (side surface of the thin plate section 16a, 16b) and on the upper surface of the second layer. The second electrodes 30 are formed in a separate manner respectively on the upper surface of the first layer and on the upper surface of the third layer. Further, terminals 32a, 32b are provided on respective ends of the first electrodes 28 respectively, and terminals 34a, 34b are provided on respective ends of the

second electrodes 30 respectively.

As in a piezoelectric/electrostrictive device 10Ae according to a fifth modified embodiment shown in FIG. 6, each of the piezoelectric/electrostrictive layer 26 and the pair of electrodes 28, 30 resides in a multilayered structure. The first electrode 28 and the second electrode 30 are alternately stacked with each other so that a substantially comb-shaped configuration is obtained in cross section to provide the piezoelectric/electrostrictive element 24a, 24b which has a multiple stage structure at a portion (substantial driving portion 18) at which the first electrode 28 and the second electrode 30 are overlapped with each other with the piezoelectric/electrostrictive layer 26 interposed therebetween. FIG. 6 is illustrative of the following case. That is, the piezoelectric/electrostrictive layer 26 has the three-layered structure. The first electrode 28 is formed in a comb-shaped configuration to be located on the lower surface of the first layer (side surface of the thin plate section 16a, 16b) and on the upper surface of the second layer. The second electrode 30 is formed in a comb-shaped configuration to be located on the upper surface of the first layer and on the upper surface of the third layer. In the case of this structure, each of the first electrode 28 and the second electrode 30 is continuous and common. Accordingly, it is possible to decrease the number of terminals 32, 34 as compared with the structure shown in FIG. 5. Therefore, it is possible to suppress the

increase in size which would be otherwise involved in the multilayered structure of the piezoelectric/electrostrictive element 24a, 24b.

Another example of the piezoelectric/electrostrictive device 10Ae according to the fifth embodiment is shown in FIG. 7. In this case, it is also preferable to form the piezoelectric/electrostrictive element 24a, 24b so that the forward end thereof stays on the thin plate section 16a, 16b. FIG. 7 is illustrative of the case in which the forward end of the piezoelectric/electrostrictive element 24a, 24b is located at a substantially central portion in the length direction of the thin plate section. This arrangement is advantageous in that the movable section 20 can be displaced to a great extent.

Alternatively, as in a piezoelectric/electrostrictive device 10Af according to a sixth modified embodiment shown in FIG. 8, it is also preferable that two piezoelectric/electrostrictive elements 24a1, 24b1 having the multiple stage structure are formed to extend over the fixation section 22 and the thin plate section 16a, 16b respectively, and another two piezoelectric/electrostrictive elements 24a2, 24b2 having the multiple stage structure are formed to extend over the movable section 20 and the thin plate section 16a, 16b respectively. In this arrangement, the movable section 20 can be displaced extremely greatly owing to the effect that the piezoelectric/electrostrictive element 24a, 24b has the multiple stage structure and the

effect that the number of points of action to displace the movable section 20 is increased. Further, the piezoelectric/electrostrictive device 10Af is excellent in high speed response performance, which is preferred.

5 Alternatively, as in a piezoelectric/electrostrictive device 10Ag according to a seventh modified embodiment shown in FIG. 9, it is also preferable that the piezoelectric /electrostrictive layer 26 has the two-layered structure to provide the piezoelectric/electrostrictive element 24a, 24b having the multiple stage structure which is formed such that the first electrode 28 is located on the lower surface of the first layer (side surface of the thin plate section 16a, 16b) and on the upper surface of the second layer, and the second electrode 30 is located on the upper surface of the first layer. In this embodiment, the space between the end surfaces 36a, 36b of the movable section 20 is filled with a member which is different from the movable section 20.

10
15
20 The multiple stage structure of the piezoelectric/electrostrictive element 24a, 24b as described above increases the force generated by the piezoelectric/electrostrictive element 24a, 24b, and thus it is possible to obtain the large displacement. Further, the rigidity of the piezoelectric/electrostrictive device 10A
25 itself is increased, and thus it is possible to realize the high resonance frequency. It is possible to achieve the high speed displacement action with ease.

When the number of stages is increased, it is possible to increase the driving force. However, the electric power consumption is also increased in accordance therewith. Therefore, when the device is practically produced and used, for example, it is preferable that the number of stages is appropriately determined depending on the way of use and the state of use. In the case of the piezoelectric /electrostrictive device 10A according to the first embodiment, even when the driving force is increased by providing the multiple stage structure of the piezoelectric/ electrostrictive element 24a, 24b, the width of the thin plate section 16a, 16b (distance in the Y axis direction) is basically unchanged. Therefore, the device is extremely preferred to make application, for example, to the actuator for the purpose of the ringing control and the positioning of the magnetic head for the hard disk to be used in an extremely narrow gap. Further, when the device is used as a sensor (for example, an acceleration sensor), the device provides the following advantage, because the electrostatic capacity is increased, and the generated electric charge is increased, owing to the multiple stage structure. That is, the level of the electric signal generated by the sensor is increased, and it is easy to perform the processing in a signal processing circuit to be connected to the downstream stage of the sensor.

The piezoelectric/electrostrictive element 24a, 24b is illustrative of the case of the so-called sandwich structure

in which the piezoelectric/electrostrictive layer 26 is interposed between the pair of electrodes 28, 30. Alternatively, as shown in FIG. 10, a pair of comb-shaped electrodes 28, 30 may be formed on the first principal surface of the piezoelectric/electrostrictive layer 26 formed on at least the side surface of the thin plate section 16a, 16b. Further alternatively, as shown in FIG. 11, a pair of comb-shaped electrodes 28, 30 are formed and embedded in the piezoelectric/electrostrictive layer 26 formed on at least the side surface of the thin plate section 16a, 16b.

The structure shown in FIG. 10 is advantageous in that it is possible to suppress the electric power consumption to be low. The structure shown in FIG. 11 makes it possible to effectively utilize the inverse piezoelectric effect in the direction of the electric field having large generated force and strain, which is advantageous to cause the large displacement.

Specifically, the piezoelectric/electrostrictive element 24a, 24b shown in FIG. 10 comprises the pair of electrodes 28, 30 having the comb-shaped structure formed on the first principal surface of the piezoelectric /electrostrictive layer 26. In this structure, the first electrode 28 and the second electrode 30 are mutually opposed to one another in an alternate manner with a gap 29 having a constant width interposed therebetween. FIG. 10 is illustrative of the case in which the pair of electrodes 28,

30 are formed on the first principal surface of the piezoelectric/electrostrictive layer 26. Alternatively, the pair of electrodes 28, 30 may be formed between the thin plate section 16a, 16b and the piezoelectric/electrostrictive layer 26. Further alternatively, the pair of comb-shaped electrodes 28, 30 may be formed on the first principal surface of the piezoelectric/electrostrictive layer 26 and between the thin plate section 16a, 16b and the piezoelectric/electrostrictive layer 26 respectively.

On the other hand, in the piezoelectric/electrostrictive element 24a, 24b shown in FIG. 11, the pair of electrodes 28, 30 having the comb-shaped structure are formed so that they are embedded in the piezoelectric/electrostrictive layer 26. In this structure, the first electrode 28 and the second electrode 30 are mutually opposed to one another in an alternate manner with a gap 29 having a constant width interposed therebetween.

The piezoelectric/electrostrictive elements 24a, 24b as shown in FIGS. 10 and 11 can be preferably used for the piezoelectric/electrostrictive device 10A according to the first embodiment as well. When the pair of comb-shaped electrodes 28, 30 are used as in the piezoelectric/electrostrictive elements 24a, 24b shown in FIGS. 10 and 11, the displacement of the piezoelectric/electrostrictive element 24a, 24b can be increased by decreasing the pitch D of the comb teeth of the respective electrodes 28, 30.

The operation of the piezoelectric/electrostrictive device 10A according to the first embodiment will now be explained. At first, for example, when the two piezoelectric/electrostrictive elements 24a, 24b are in the natural state, namely when both of the piezoelectric /electrostrictive elements 24a, 24b do not make the displacement action, then the major axis m of the piezoelectric/electrostrictive device 10A (major axis of the fixation section) is substantially coincident with the central axis n of the movable section 20 as shown in FIG. 12.

Starting from this state, for example, a sine wave Wa, which has a predetermined bias electric potential Vb, is applied to the pair of electrodes 28, 30 of the first piezoelectric/electrostrictive element 24a as shown in a waveform figure shown in FIG. 13A, while a sine wave Wb, which has a phase different from that of the sine wave Wa by about 180°, is applied to the pair of electrodes 28, 30 of the second piezoelectric/electrostrictive element 24b as shown in FIG. 13B.

The piezoelectric/electrostrictive layer 26 of the first piezoelectric/electrostrictive element 24a makes the contraction displacement in the direction of the first principal surface at a stage at which, for example, a voltage having a maximum value is applied to the pair of electrodes 28, 30 of the first piezoelectric/electrostrictive element 24a. Accordingly, as

shown in FIG. 14, for example, the stress is generated for the first thin plate section 16a to bend the thin plate section 16a, for example, in the rightward direction as shown by the arrow A. Therefore, the first thin plate section 16a is bent in the rightward direction. At this time, a state is given, in which no voltage is applied to the pair of electrodes 28, 30 of the second piezoelectric /electrostrictive element 24b. Therefore, the second thin plate section 16b follows the bending of the first thin plate section 16a, and it is bent in the rightward direction. As a result, the movable section 20 is displaced, for example, in the rightward direction with respect to the major axis m of the piezoelectric /electrostrictive device 10A. The displacement amount is changed depending on the maximum value of the voltage applied to each of the piezoelectric/electrostrictive elements 24a, 24b. For example, the larger the maximum value is, the larger the displacement amount is.

Especially, when a material having high coercive electric field is applied as the constitutive material for the piezoelectric/electrostrictive layer 26, it is also preferable that the bias electric potential is adjusted so that the level of the minimum value is a slightly negative level as depicted by waveforms indicated by two-dot chain lines in FIGS. 13A and 13B. In this case, for example, the stress, which is in the same direction as the bending direction of the first thin plate section 16a, is generated

in the second thin plate section 16b by driving the piezoelectric /electrostrictive element (for example, the second piezoelectric/electrostrictive element 24b) to which the negative level is applied. Accordingly, it is possible to further increase the displacement amount of the movable section 20. In other words, when the waveforms indicated by the dashed lines in FIGS. 13A and 13B are used, the device is allowed to have such a function that the piezoelectric /electrostrictive element 24b or 24a, to which the negative level is applied, supports the piezoelectric /electrostrictive element 24a or 24b which principally makes the displacement action.

In the case of the piezoelectric/electrostrictive device 10Af shown in FIG. 8, the voltage (see the sine waveform Wa) shown in FIG. 13A is applied, for example, to the piezoelectric/electrostrictive element 24a1 and the piezoelectric/electrostrictive element 24b2 which are arranged on the diagonal line, and the voltage (see the sine waveform Wb) shown in FIG. 13B is applied to the other piezoelectric/electrostrictive element 24a2 and the other piezoelectric/electrostrictive element 24b1.

As described above, in the piezoelectric /electrostrictive device 10A according to the first embodiment, the minute displacement of the piezoelectric /electrostrictive element 24a, 24b is amplified into the large displacement action by utilizing the bending of the thin plate section 16a, 16b, and it is transmitted to the

movable section 20. Accordingly, it is possible to greatly displace the movable section 20 with respect to the major axis m of the piezoelectric/electrostrictive device 10A.

5 Especially, in the first embodiment, the movable section 20 is provided with the mutually opposing end surfaces 36a, 36b. In this arrangement, the gap 38 is provided between the mutually opposing end surfaces 36a, 36b, or the member 40, which is lighter than the constitutive member of the movable section 20, is allowed to intervene between the mutually opposing end surfaces 36a, 36b. Accordingly, it is possible to effectively realize the light weight of the movable section 20. Thus, it is possible to increase the resonance frequency without decreasing the displacement amount of the movable section 20.

10 The frequency herein indicates the frequency of the voltage waveform obtained when the movable section 20 is displaced rightwardly and leftwardly by alternately switching the voltage applied to the pair of electrodes 28, 30. The resonance frequency indicates the frequency at which the displacement action of the movable section 20 is maximum when the predetermined sine wave voltage is applied.

20 In the piezoelectric/electrostrictive device 10A according to the first embodiment, the hybrid structure is provided, in which the pair of thin plate sections 16a, 16b are made of metal, and the other components, i.e., the movable section 20 and the fixation section 22 are made of

ceramics. It is unnecessary that all of the parts are formed with the piezoelectric /electrostrictive material which is a fragile material having a relatively heavy weight. Therefore, the device has the following advantages.

5 That is, the device has the high mechanical strength, and it is excellent in handling performance, shock resistance, and moisture resistance. Further, the operation of the device is scarcely affected by harmful vibration (for example, noise vibration and remaining vibration during high speed operation).

Further, in this embodiment, when the gap 38 is formed between the mutually opposing end surfaces 36a, 36b, the part 20A of the movable section 20 including the first end surface 36a and the another part 20B of the movable section 20 including the second end surface 36b are easily bent, resulting in strong resistance to the deformation.

15 Accordingly, the piezoelectric/electrostrictive device 10A is excellent in handling performance.

The surface area of the movable section 20 or the fixation section 22 is increased owing to the presence of the mutually opposing end surfaces 36a, 36b. Therefore, as shown in FIG. 1, when the movable section 20 has the mutually opposing end surfaces 36a, 36b, the attachment area can be increased when another part is attached to the

20

25 movable section 20. Thus, it is possible to improve the attachment performance for the part. It is now assumed that the part is secured, for example, with an adhesive or the

like. In this case, the adhesive is fully distributed to the end surfaces 36a, 36b as well as to the first principal surface (attachment surface for the part) of the movable section 20. Therefore, it is possible to dissolve, for example, shortage of application of the adhesive. Thus, it is possible to reliably secure the part.

As an example of such an arrangement, FIG. 15 is illustrative of a case in which another piezoelectric /electrostrictive device according to the embodiment of the present invention (second piezoelectric/electrostrictive device 10A2) is secured to the movable section 20 of the piezoelectric/electrostrictive device according to the embodiment of the present invention (first piezoelectric /electrostrictive device 10A1).

The first piezoelectric/electrostrictive device 10A1 has its fixation section 22 which is secured to the surface of a base plate 122 by the aid of an adhesive 120. The fixation section 22 of the second piezoelectric/electrostrictive device 10A2 is secured to the movable section 20 of the first piezoelectric/electrostrictive device 10A1 by the aid of an adhesive 124. That is, in this arrangement, the two piezoelectric/electrostrictive devices 10A1, 10A2 are arranged in series. A member 126 having a light weight, which is different from the movable section 20, is allowed to intervene between the mutually opposing end surfaces 36a, 36b of the movable section 20 of the second piezoelectric/electrostrictive device 10A2.

In this case, the adhesive 124 for gluing the second piezoelectric/electrostrictive device 10A2 is fully distributed up to the space between the end surfaces 36a, 36b of the movable section 20 of the first piezoelectric /electrostrictive device 10A1. Accordingly, the second piezoelectric/electrostrictive device 10A2 is tightly secured to the first piezoelectric/electrostrictive device 10A1. When the piezoelectric/electrostrictive device 10A2 is glued as described above, the light weight member (adhesive 124 in this case), which is different from the movable section 20, is allowed to intervene between the end surfaces 36a, 36b simultaneously with the adhesion. Therefore, this arrangement is advantageous in that the production step can be simplified.

On the other hand, as shown in FIG. 3, when the fixation section 22 has the mutually opposing end surfaces 36a, 36b, it is possible to tightly fix the piezoelectric /electrostrictive device 10Ab according to the second modified embodiment to a predetermined fixation portion, in addition to the effect obtained when the movable section 20 has the mutually opposing end surfaces 36a, 36b as described above. Thus, it is possible to improve the reliability.

In the first embodiment, the portion (substantial driving portion 18), at which the pair of electrodes 28, 30 are overlapped with each other with the piezoelectric /electrostrictive layer 26 interposed therebetween, is continuously formed over the range from the part of the

fixation section 22 to the part of the thin plate section 16a, 16b. If the substantial driving portion 18 is formed to further extend over a part of the movable section 20, then it is feared that the displacement action of the movable section 20 is restricted by the substantial driving portion 18, and it is impossible to obtain the large displacement. However, in this embodiment, the substantial driving portion 18 is formed such that it does not range over the movable section 20. Therefore, it is possible to avoid the inconvenience of the restriction of the displacement action of the movable section 20, and it is possible to increase the displacement amount of the movable section 20.

On the other hand, when the piezoelectric/electrostrictive element 24a, 24b is formed on the part of the movable section 20, it is preferable that the substantial driving portion 18 is located over the range from the part of the movable section 20 to the part of the thin plate section 16a, 16b, because of the following reason. That is, if the substantial driving portion 18 is formed to extend up to a part of the fixation section 22, the displacement action of the movable section 20 is restricted as described above.

Next, explanation will be made for preferred illustrative constructions of the piezoelectric /electrostrictive device 10A according to the first embodiment.

At first, in order to ensure the displacement action of the movable section 20, it is preferable that the distance g, by which the substantial driving portion 18 of the piezoelectric/electrostrictive element 24a, 24b is overlapped with the fixation section 22 or the movable section 20, is not less than 1/2 of the thickness d of the thin plate section 16a, 16b.

The device is constructed such that the ratio a/b between the distance (distance in the X axis direction) a between the inner walls of the thin plate sections 16a, 16b and the width (distance in the Y axis direction) b of the thin plate section 16a, 16b is 0.5 to 20. The ratio a/b is preferably 1 to 15 and more preferably 1 to 10. The prescribed value of the ratio a/b is prescribed on the basis of the discovery that the displacement amount of the movable section 20 is increased to makes it possible to dominantly obtain the displacement in the X-Z plane.

On the other hand, it is desirable that the ratio e/a between the length (distance in the Z axis direction) e of the thin plate section 16a, 16b and the distance a between the inner walls of the thin plate sections 16a, 16b is preferably 0.5 to 10 and more preferably 0.5 to 5.

Further, it is preferable that the hole 12 is filled with a gel material, for example, silicon gel. Usually, the displacement action of the movable section 20 is restricted by the presence of such a filler material. However, in the first embodiment, it is intended to realize the light weight

brought about by the formation of the end surfaces 36a, 36b on the movable section 20 and increase the displacement amount of the movable section 20. Therefore, the restriction of the displacement action of the movable section 20 due to the filler material is counteracted. Accordingly, it is possible to realize the effect owing to the presence of the filler material, namely the realization of the high resonance frequency and the maintenance of the rigidity.

It is preferable that the length (distance in the Z axis direction) f of the movable section 20 is short, because of the following reason. That is, it is possible to realize the light weight and increase the resonance frequency by shortening the length. However, in order to ensure the rigidity of the movable section 20 in the X axis direction and obtain its reliable displacement, it is desirable that the ratio f/d with respect to the thickness d of the thin plate section 16a, 16b is not less than 2, and preferably not less than 5.

The actual size of each component is determined considering, for example, the joining area for attaching the part to the movable section 20, the joining area for attaching the fixation section 22 to another member, the joining area for attaching the electrode terminal or the like, and the strength, the durability, the necessary displacement amount, the resonance frequency, and the driving voltage of the entire piezoelectric/electrostrictive

device 10A.

Specifically, for example, the distance a between the inner walls of the thin plate sections 16a, 16b is preferably 100 μm to 2000 μm and more preferably 200 μm to 1600 μm . The width b of the thin plate section 16a, 16b is preferably 50 μm to 2000 μm and more preferably 100 μm to 500 μm . The thickness d of the thin plate section 16a, 16b is preferably 2 μm to 100 μm and more preferably 10 μm to 80 μm , while it satisfies $b > d$ in relation to the width b of the thin plate section 16a, 16b, in order to make it possible to effectively suppress the swaying displacement which is the displacement component in the Y axis direction.

The length e of the thin plate section 16a, 16b is preferably 200 μm to 3000 μm and more preferably 300 μm to 2000 μm . The length f of the movable section 20 is preferably 50 μm to 2000 μm and more preferably 100 μm to 1000 μm .

The arrangement as described above exhibits such an extremely excellent effect that the displacement in the Y axis direction does not exceeds 10 % with respect to the displacement in the X axis direction, while the device can be driven at a low voltage by appropriately making adjustment within the range of the size range and the actual size, and it is possible to suppress the displacement component in the Y axis direction to be not more than 5 %. In other words, the movable section 20 is displaced in one axis direction, i.e., substantially in the X axis direction.

Further, the high speed response is excellent, and it is possible to obtain the large displacement at a relatively low voltage.

In the piezoelectric/electrostrictive device 10A, the shape of the device is not the plate-shaped configuration (thickness is small in the direction perpendicular to the displacement direction) unlike conventional one. Each of the movable section 20 and the fixation section 22 has the approximately rectangular parallelepiped-shaped configuration. The pair of thin plate sections 16a, 16b are provided so that the side surface of the movable section 20 is continuous to the side surface of the fixation section 22. Therefore, it is possible to selectively increase the rigidity of piezoelectric/electrostrictive device 10A in the Y axis direction.

That is, in the piezoelectric/electrostrictive device 10A, it is possible to selectively generate only the operation of the movable section 20 in the plane (XZ plane). It is possible to suppress the operation of the movable section 20 in the YZ plane (operation in the so-called swaying direction).

Next, explanation will be made for the respective constitutive components of the piezoelectric/electrostrictive device 10A according to the first embodiment.

As described above, the movable section 20 is the portion which is operated on the basis of the driving amount

of the thin plate section 16a, 16b, and a variety of members are attached thereto depending on the purpose of use of the piezoelectric/electrostrictive device 10A. For example, when the piezoelectric/electrostrictive device 10A is used as a displacement element, a shield plate for an optical shutter or the like is attached thereto. Especially, when the piezoelectric/electrostrictive device 10A is used for the mechanism for positioning a magnetic head of a hard disk drive or for suppressing the ringing, a member required to be positioned is attached thereto, including, for example, the magnetic head, a slider provided with the magnetic head, and a suspension provided with the slider.

As described above, the fixation section 22 is the portion for supporting the thin plate sections 16a, 16b and the movable section 20. For example, in the case of the utilization to position the magnetic head of the hard disk drive, the entire piezoelectric/electrostrictive device 10A is fixed by supporting and securing the fixation section 22, for example, to a carriage arm attached to VCM (voice coil motor) or a fixation plate or a suspension attached to the carriage arm. As shown in FIG. 1, the terminals 32, 34 for driving the piezoelectric /electrostrictive elements 24a, 24b and other members are arranged on the fixation section 22 in some cases.

The material for constructing the movable section 20 and the fixation section 22 is not specifically limited provided that it has rigidity. However, it is possible to

preferably use ceramics to which the ceramic green sheet-stacking method is applicable as described later on.

Specifically, the material includes, for example, materials containing a major component of zirconia represented by stabilized zirconia and partially stabilized zirconia, alumina, magnesia, silicon nitride, aluminum nitride, and titanium oxide, as well as materials containing a major component of a mixture of them. However, in view of the high mechanical strength and the high toughness, it is preferable to use a material containing a major component of zirconia, especially stabilized zirconia and a material containing a major component of partially stabilized zirconia. The metal material is not limited provided that it has rigidity. However, the metal material includes, for example, stainless steel, nickel, brass, cupronickel, and bronze.

Those which are stabilized or partially stabilized as follows are preferably used as stabilized zirconia or partially stabilized zirconia as described above. That is, the compound to be used for stabilizing or partially stabilizing zirconia includes yttrium oxide, ytterbium oxide, cerium oxide, calcium oxide, and magnesium oxide. When at least one compound of them is added and contained, zirconia is partially or fully stabilized. However, as for the stabilization, the objective zirconia can be stabilized not only by adding one type of the compound but also by adding a combination of the compounds.

The amount of addition of each of the compounds is desirably as follows. That is, yttrium oxide or ytterbium oxide is added by 1 to 30 mole %, preferably 1.5 to 10 mole %. Cerium oxide is added by 6 to 50 mole %, preferably 8 to 20 mole %. Calcium oxide or magnesium oxide is added by 5 to 40 mole %, preferably 5 to 20 mole %. Especially, it is preferable to use yttrium oxide as a stabilizer. In this case, yttrium oxide is desirably added by 1.5 to 10 mole %, more preferably 2 to 4 mole %. For example, alumina, silica, or transition metal oxide may be added as an additive of sintering aid or the like in a range of 0.05 to 20 % by weight. However, when the sintering integration based on the film formation method is adopted as a technique for forming the piezoelectric/electrostrictive element 24a, 24b, it is also preferable to add, for example, alumina, magnesia, and transition metal oxide as an additive.

In order to obtain the mechanical strength and the stable crystal phase, it is desirable that the average crystal grain size of zirconia is 0.05 to 3 μm , preferably 0.05 to 1 μm . As described above, ceramics can be used for the thin plate section 16a, 16b in the same manner as in the movable section 20 and the fixation section 22. Preferably, it is advantageous to construct the thin plate sections 16a, 16b with a substantially identical material in view of the reliability of the joined portion and the strength of the piezoelectric/electrostrictive device 10A in order to reduce any complicated procedure of the production.

As described above, the thin plate section 16a, 16b is the portion which is driven in accordance with the displacement of the piezoelectric/electrostrictive element 24a, 24b. The thin plate section 16a, 16b is the thin plate-shaped member having flexibility, and it functions to amplify the expansion and contraction displacement of the piezoelectric/electrostrictive element 24a, 24b arranged on the surface as the bending displacement and transmit the displacement to the movable section 20. Therefore, it is enough that the shape or the material of the thin plate section 16a, 16b provides the flexibility with the mechanical strength of such a degree that it is not broken by the bending displacement. It is possible to make appropriate selection considering the response performance and the operability of the movable section 20.

It is preferable that the thickness d of the thin plate section 16a, 16b is preferably about $2\text{ }\mu\text{m}$ to $100\text{ }\mu\text{m}$. It is preferable that the combined thickness of the thin plate section 16a, 16b and the piezoelectric/electrostrictive element 24a, 24b is $7\text{ }\mu\text{m}$ to $500\text{ }\mu\text{m}$. It is preferable that the thickness of the electrode 28, 30 is 0.1 to $50\text{ }\mu\text{m}$, and the thickness of the piezoelectric/electrostrictive layer 26 is 3 to $300\text{ }\mu\text{m}$. The width b of the thin plate section 16a, 16b is preferably $50\text{ }\mu\text{m}$ to $2000\text{ }\mu\text{m}$.

On the other hand, as for the shape and the material for the thin plate section 16a, 16b, it is enough to use those having the flexibility and having the mechanical

strength of such a degree that no breakage occurs due to the bending displacement. Metal is preferably used. In this case, as described above, it is preferable to use a metal material which has the flexibility and which is capable of the bending displacement. Specifically, it is preferable to use a metal material which has a Young's modulus of not less than 100 GPa.

Preferably, it is desirable that the thin plate section 16a, 16b is made of an iron-based material such as various spring steel materials, maraging stainless steel materials, and stainless steel materials including, for example, austenite-based stainless steel materials such as SUS301, SUS304, AISI653, and SUH660, ferrite-based stainless steel materials such as SUS430 and SUS434, martensite-based stainless steel materials such as SUS410 and SUS630, and semiaustenite-based stainless steel materials such as SUS631 and AISI632. Alternatively, it is desirable that the thin plate section 16a, 16b is made of a non-ferrous material such as superelastic titanium alloy represented by titanium-nickel alloy, brass, cupronickel, aluminum, tungsten, molybdenum, beryllium copper, phosphor bronze, nickel, nickel-iron alloy, and titanium.

When ceramics is used for the thin plate section 16a, 16b in the same manner as the movable section 20a, 20b and the fixation section 22, it is preferable to use zirconia. Especially, a material containing a major component of stabilized zirconia and a material containing a major

component of partially stabilized zirconia are used most preferably, because of the large mechanical strength even in the case of the thin wall thickness, the high toughness, and the small reactivity with the piezoelectric/electrostrictive layer 26 and the electrode material.

The piezoelectric/electrostrictive element 24a, 24b has at least the piezoelectric/electrostrictive layer 26 and the pair of electrodes 28, 30 for applying the electric field to the piezoelectric/electrostrictive layer 26. It is possible to use, for example, piezoelectric/electrostrictive elements of the unimorph type and the bimorph type. However, those of the unimorph type combined with the thin plate section 16a, 16b are suitable for the piezoelectric /electrostrictive device 10A as described above, because they are excellent in stability of the generated displacement amount and they are advantageous to realize the light weight.

For example, as shown in FIG. 1, it is possible to preferably use, for example, the piezoelectric /electrostrictive element comprising the first electrode 28, the piezoelectric/electrostrictive layer 26, and the second electrode 30 which are stacked in the layered configuration. Additionally, it is also preferable to provide the multiple stage structure as shown in FIGS. 5 to 9. In this arrangement, the positional discrepancy of the film (electrode film) for constructing the electrode 28, 30, i.e., for example, the positional discrepancy of the

electrode 28 in the in-plane direction on the perpendicular projection plane disposed as every other layer is not more than 50 μm . This facts also holds for the electrode 30.

As shown in FIG. 1, the piezoelectric/electrostrictive element 24a, 24b is preferably formed on the outer surface side of the piezoelectric/electrostrictive device 10A in view of the fact that the thin plate sections 16a, 16b can be driven to a greater extent. However, the piezoelectric /electrostrictive element 24a, 24b may be formed on the inner surface side of the piezoelectric/electrostrictive device 10A, i.e., on the inner wall surface of the hole 12 depending on, for example, the form of use. Alternatively, the piezoelectric/electrostrictive elements 24a, 24b may be formed both on the outer surface side and on the inner surface side of the piezoelectric/electrostrictive device 10A.

Piezoelectric ceramics is preferably used for the piezoelectric/electrostrictive layer 26. However, it is also possible to use electrostrictive ceramics, ferroelectric ceramics, or anti-ferroelectric ceramics. However, when the piezoelectric/electrostrictive device 10A is used, for example, to position the magnetic head of the hard disk drive, it is important to provide the linearity concerning the displacement amount of the movable section 20 and the driving voltage or the output voltage. Therefore, it is preferable to use a material having small strain hysteresis. It is preferable to use a material having a

coercive electric field of not more than 10 kV/mm.

Specified materials include ceramics containing, for example, lead zirconate, lead titanate, lead magnesium niobate, lead nickel niobate, lead zinc niobate, lead manganese niobate, lead antimony stannate, lead manganese tungstate, lead cobalt niobate, barium titanate, sodium bismuth titanate, potassium sodium niobate, and strontium bismuth tantalate singly or in mixture.

Especially, a material containing a major component of lead zirconate, lead titanate, and lead magnesium niobate, or a material containing a major component of sodium bismuth titanate is preferably used, in order to obtain the product having a stable composition with a high electromechanical coupling coefficient and a piezoelectric constant and with small reactivity with the thin plate sections 16a, 16b (ceramics) when the thin plate section 16a, 16b is made of ceramics, and the piezoelectric /electrostrictive layer 26 is sintered in an integrated manner.

It is also preferable to use ceramics obtained by adding, to the material described above, for example, oxides of lanthanum, calcium, strontium, molybdenum, tungsten, barium, niobium, zinc, nickel, manganese, cerium, cadmium, chromium, cobalt, antimony, iron, yttrium, tantalum, lithium, bismuth, and stannum, or compounds each containing at least one component to be finally formed into oxide, singly or in mixture.

For example, when lanthanum and/or strontium is

contained in the major components of lead zirconate, lead titanate, and lead magnesium niobate, an advantage is obtained in some cases, for example, in such a way that the coercive electric field and the piezoelectric characteristic can be adjusted.

It is desirable to avoid the addition of a material such as silica which tends to form glass, because of the following reason. That is, the material such as silica tends to react with the piezoelectric/electrostrictive material during the heat treatment for the piezoelectric /electrostrictive layer. As a result, the composition is varied, and the piezoelectric characteristic is deteriorated.

On the other hand, it is preferable that the piezoelectric/electrostrictive element 24a, 24b and the pair of electrodes 28, 30 are made of metal which is solid at room temperature and which is excellent in conductivity. For example, it is possible to use metal simple substance or alloy of, for example, aluminum, titanium, chromium, iron, cobalt, nickel, copper, zinc, niobium, molybdenum, ruthenium, palladium, rhodium, silver, stannum, tantalum, tungsten, iridium, platinum, gold, and lead. It is also preferable to use a cermet material obtained by dispersing, in the metal described above, ceramics of the same material as that of the piezoelectric/electrostrictive layer 26 or the material different from that of the piezoelectric/electrostrictive layer 26.

for the electrodes 28, 30. It is preferable that the electrode 28, 30 is made of cermet as a mixture of the high melting point metal and the piezoelectric/electrostrictive material or another ceramics.

5 The thickness of the electrode 28, 30 also serves as a factor to considerably decrease the displacement of the piezoelectric/electrostrictive element 24a, 24b. Therefore, it is preferable, especially for the electrode formed after the sintering of the piezoelectric/electrostrictive layer 26, to use organic metal paste capable of obtaining a dense and thinner film after the sintering, for example, a material such as gold resinate paste, platinum resinate paste, and silver resinate paste.

10 Next, explanation will be made with reference to FIGS. 16A to 23 for several methods for producing the piezoelectric/electrostrictive device 10A according to the first embodiment.

15 In the piezoelectric/electrostrictive device 10A according to the first embodiment, the thin plate section 16a, 16b is made of metal, and the constitutive material for each of the movable section 20 and the fixation section 22 is ceramics. Therefore, it is preferable that the constitutive elements of the piezoelectric/electrostrictive device 10A concerning the fixation section 22 and the movable section 20, except for the thin plate sections 16a, 20 16b and the piezoelectric /electrostrictive elements 24a, 24b, are produced by using the ceramic green sheet-stacking

method. On the other hand, it is preferable that the piezoelectric/electrostrictive elements 24a, 24b as well as the respective terminals 32, 34 are produced by using the film formation method, for example, for the thin film and the thick film.

The thin plate sections 16a, 16b are preferably secured to the side surfaces of the movable section 20 and the fixation section 22 by the aid of the adhesive 200. The piezoelectric/electrostrictive element 24a, 24b is preferably secured onto the thin plate section 16a, 16b by the aid of the adhesive 202.

According to the ceramic green sheet-stacking method in which the movable section 20 and the fixation section 22 of the piezoelectric/electrostrictive device 10A can be formed in an integrated manner, the time-dependent change of state scarcely occurs at the joined portions of the respective members. Therefore, this method provides the high reliability of the joined portion, and it is advantageous to ensure the rigidity.

In the piezoelectric/electrostrictive device 10A according to the first embodiment, the boundary portion between the thin plate section 16a, 16b and the fixation section 22 and the boundary portion between the thin plate section 16a, 16b and the movable section 20 function as supporting points for expressing the displacement. Therefore, the reliability of each of the boundary portions is an important point which dominates the characteristic of

the piezoelectric/electrostrictive device 10A.

The production methods described below are excellent in reproducibility and formability. Therefore, it is possible to obtain the piezoelectric/electrostrictive device having a predetermined shape within a short period of time with good reproducibility.

A first production method for the piezoelectric /electrostrictive device 10A according to the first embodiment will be specifically explained below. The following definitions are now made. The stack, which is obtained by stacking the ceramic green sheets, is defined to be the ceramic green stack 158 (see, for example, FIG. 16B). The integrated matter, which is obtained by sintering the ceramic green stack 158, is defined to be the ceramic stack 160 (see, for example, FIG. 17A). The stuck or glued matter comprising the ceramic stack 160 and the metal plate is defined to be the hybrid stack 162 (see FIG. 18). The integrated matter comprising the movable section 20, the thin plate sections 16a, 16b, and the fixation section 22, which is obtained by cutting off unnecessary portions from the hybrid stack 162, is defined to be the substrate 14D (see FIG. 19).

In the first production method, the hybrid stack 162 is finally cut into chip units to produce a large number of piezoelectric/electrostrictive devices 10A. However, in order to simplify the explanation, description will be made principally for the case in which one individual of

piezoelectric/electrostrictive device 10A is produced.

At first, for example, a binder, a solvent, a dispersing agent, and a plasticizer are added and mixed with a ceramic powder such as zirconia to prepare a slurry. The slurry is subjected to a defoaming treatment, and then a ceramic green sheet having a predetermined thickness is prepared in accordance with, for example, the reverse roll coater method and the doctor blade method.

Subsequently, the ceramic green sheet is processed into those having various shapes as shown in FIG. 16A in accordance with, for example, the punching out based on the use of the mold and the laser machining to prepare a plurality of ceramic green sheets for forming the substrate. Specifically, a plurality (for example, four) of ceramic green sheets 50A to 50D each of which is formed with a window 54 for forming at least the hole 12 thereafter, and a ceramic green sheet 102 which is continuously formed with a window 54 for forming the hole 12 thereafter and a window 100 for forming the movable section 20 having the mutually opposing end surfaces 36a, 36b are prepared.

After that, as shown in FIG. 16B, the ceramic green sheets 50A to 50D, 102 are stacked and secured under pressure to form a ceramic green stack 158. The stacking is performed while the ceramic green sheet 102 is positioned at the center. After that, the ceramic green stack 158 is sintered to obtain a ceramic stack 160 as shown in FIG. 17A. At this stage, the ceramic stack 160 is formed such that the

hole 130 is formed by the windows 54, 100.

Subsequently, as shown in FIG. 17B, the piezoelectric /electrostrictive elements 24a, 24b, which are constructed as separate members, are respectively glued with an epoxy adhesive 202 to the surfaces of metal plates 152A, 152B to serve as the thin plate sections.

Subsequently, the metal plates 152A, 152B are glued to the ceramic stack 160 with an epoxy adhesive 200 so that the ceramic stack 160 is interposed between the metal plates 152A, 152B and the hole 130 is closed thereby to provide a hybrid stack 162 (see FIG. 18).

Subsequently, as shown in FIG. 18, the hybrid stack 162, which is formed with the piezoelectric/electrostrictive elements 24a, 24b, is cut along cutting lines C1, C2, C5 to thereby cut off side portions and forward end portions of the hybrid stack 162. As a result of the cutoff, as shown in FIG. 19, the piezoelectric/electrostrictive device 10A according to the first embodiment is obtained, in which the piezoelectric/electrostrictive elements 24a, 24b are formed on the thin plate sections constituted by the metal plates, of the substrate 14D, and the movable section 20 having the mutually opposing end surfaces 36a, 36b is formed.

On the other hand, in the second production method, at first, as shown in FIG. 20A, a plurality (for example, four) of ceramic green sheets 50A to 50D each of which is formed with a window 54 for forming at least the hole 12 thereafter, and a ceramic green sheet 102 which is

continuously formed with a window 54 for forming the hole 12 thereafter and a window 100 for forming the movable section 20 having the mutually opposing end surfaces 36a, 36b are prepared.

5 After that, as shown in FIG. 20B, the ceramic green sheets 50A to 50D, 102 are stacked and secured under pressure to form a ceramic green stack 158. After that, the ceramic green stack 158 is sintered to obtain a ceramic stack 160 as shown in FIG. 21A. At this stage, the ceramic stack 160 is formed such that the hole 130 is formed by the windows 54, 100.

Subsequently, as shown in FIG. 21B, the metal plates 152A, 152B are glued to the ceramic stack 160 with the epoxy adhesive 200 so that the ceramic stack 160 is interposed between the metal plates 152A, 152B and the hole 130 is closed thereby to provide a hybrid stack 162. In this procedure, when the piezoelectric/electrostrictive elements 24a, 24b are stuck to the surfaces of the glued metal plates 152A, 152B, the hole 130 is optionally filled with a filler material 164 as shown in FIG. 21A so that a sufficient gluing pressure may be applied.

It is necessary to finally remove the filler material 164. Therefore, it is preferable to use a hard material which is easily dissolved in a solvent or the like. The material includes, for example, organic resin, wax, and brazing filler material. It is also possible to adopt a material obtained by mixing ceramic powder as a filler with

organic resin such as acrylic.

Subsequently, as shown in FIG. 21B, the piezoelectric /electrostrictive elements 24a, 24b, which are constructed as separate members, are glued with the epoxy adhesive 202 to the surfaces of the metal plates 152A, 152B of the hybrid stack 162. The separate members of the piezoelectric /electrostrictive elements 24a, 24b can be formed, for example, in accordance with the ceramic green sheet-stacking method.

Subsequently, as shown in FIG. 22, the hybrid stack 162, which is formed with the piezoelectric/electrostrictive elements 24a, 24b, is cut along cutting lines C1, C2, C5 to thereby cut off side portions and forward end portions of the hybrid stack 162. As a result of the cutoff, as shown in FIG. 23, the piezoelectric/electrostrictive device 10A according to the first embodiment is obtained, in which the piezoelectric /electrostrictive elements 24a, 24b are formed on the thin plate sections constituted by the metal plates, of the substrate 14D, and the movable section 20 having the mutually opposing end surfaces 36a, 36b is formed.

When all of the substrate section is made of metal, for example, the portions corresponding to the ceramic stack 160 shown in FIG. 17A are formed by means of molding. Further, bulk-shaped members may be formed in accordance with the method of grinding machining, wire electric discharge machining, mold stamping, or chemical etching, or thin metal materials may be stacked to form the substrate section in

accordance with the cladding method.

Next, a piezoelectric/electrostrictive device 10B according to the second embodiment will be explained with reference to FIGS. 24 to 52.

As shown in FIG. 24, the piezoelectric/electrostrictive device 10B according to the second embodiment comprises a pair of mutually opposing thin plate sections 16a, 16b, and a fixation section 22 for supporting the thin plate sections 16a, 16b. A stacked type piezoelectric/electrostrictive element 24 is arranged on one thin plate section 16a of the pair of thin plate sections 16a, 16b. In FIGS. 24 and 25, the stacked type piezoelectric/electrostrictive element 24 is illustrated in a simplified manner, because its structure is complicated. Details are shown in magnified views of FIGS. 26 to 29.

The fixation section 22 is secured, for example, by the aid of an adhesive 200 between the respective rearward ends of the pair of thin plate sections 16a, 16b. The forward ends of the pair of thin plate sections 16a, 16b are open ends.

As shown in FIG. 25, for example, the movable section 20 or various parts and members are secured, for example, by the aid of the adhesive 200 between the respective forward ends of the pair of thin plate sections 16a, 16b. The example shown in FIG. 25 is illustrative of the case in which the movable section 20, which is constructed by the same member as that of the fixation section 22, is secured

by the aid of the adhesive 200 between the respective forward ends of the pair of thin plate sections 16a, 16b.

Each of the pair of thin plate sections 16a, 16b is made of metal. The fixation section 22 and the movable section 20 are made of ceramics or metal. Especially, in the examples shown in FIGS. 24 and 25, the thickness of the first thin plate section 16a on which the stacked type piezoelectric/electrostrictive element 24 is formed, of the pair of thin plate sections 16a, 16b is larger than the thickness of the second thin plate section 16b.

The stacked type piezoelectric/electrostrictive element 24 is stuck to the thin plate section 16b by the aid of an adhesive 202 such as organic resin, glass, brazing, soldering, and eutectic bonding. That is, the stacked type piezoelectric/electrostrictive element 24 is secured by the adhesive 202 to the thin plate section 16a made of metal to thereby construct an actuator section 204 which is the driving source of the piezoelectric/electrostrictive device 10B.

In the piezoelectric/electrostrictive device 10B, the forward end (portion to which the movable section 20 is attached) of the thin plate section 16a (16a and 16b in the example shown in FIG. 25) is displaced in accordance with the driving of the actuator section 204. Alternatively, the displacement of the forward end of the thin plate section 16a is electrically detected by the aid of the actuator section (transducer section in the case of the use as a

sensor) 204. In this case, the device is utilized as a sensor.

As shown in FIG. 26, for example, the stacked type piezoelectric/electrostrictive element 24 is constructed as follows. That is, each of the piezoelectric /electrostrictive layer 26 and the pair of electrodes 28, 30 has the multilayered structure, and the first electrodes 28 and the second electrodes 30 are alternately stacked respectively to give the multiple stage structure at the portion at which the first electrodes 28 and the second electrodes 30 are overlapped with each other with the piezoelectric /electrostrictive layer 26 intervening therebetween.

In FIG. 26, each of the piezoelectric/electrostrictive layer 26 and the pair of electrodes 28, 30 has the multilayered structure. The first electrode 28 and the second electrode 30 are alternately stacked with each other to give the substantially comb-shaped configuration. The multiple stage structure is formed at the portion at which the first electrode 28 and the second electrode 30 are overlapped with each other with the piezoelectric /electrostrictive layer 26 interposed therebetween.

Specifically, the stacked type piezoelectric/electrostrictive element 24 has the approximately rectangular parallelepiped-shaped configuration, comprising a plurality of piezoelectric/electrostrictive layers 26 and a plurality of electrode films 28, 30. The electrode films 28, 30, which

contact with the upper and lower surfaces of each of the piezoelectric/electrostrictive layers 26, are alternately led to opposite end surfaces 208, 209 respectively. End surface electrodes 28c, 30c, which electrically connect the respective electrode films 28, 30 alternately led to the opposite end surfaces 208, 209, are electrically connected to terminals 28b, 30b which are formed on the surface of the outermost layer of the piezoelectric/electrostrictive layer 26 and which are arranged while being separated from each other by a predetermined distance D_k .

It is preferable that the predetermined distance D_k between the terminals 28b, 30b is not less than 20 μm . Further, the material of the electrode films 28, 30 to make contact with the upper and lower surfaces of the piezoelectric/electrostrictive layer may be different from the material of the end surface electrodes 28c, 30c. Further, at least one of the terminals (terminal 28b in the example shown in FIG. 26) and the end surface electrode 28c corresponding to the terminal 28b may be electrically connected with a thin film electrode film (outer surface electrode) 28d which is thinner than the terminal 28b and the end surface electrode 28c.

The surface electrode film 28d, the end surface electrodes 28c, 30c, and the terminals 28b, 30b, which are formed before sintering the piezoelectric/electrostrictive layer 26, may be thin, and they may have low heat resistance, as compared with the electrode layers 28, 30

which are formed before sintering the piezoelectric/electrostrictive layer 26 or which are sintered simultaneously.

FIG. 26 is illustrative of the following case. That is, the piezoelectric/electrostrictive layer 26 has the five-layered structure. The first electrodes 28 are formed in the comb-shaped configuration so that they are disposed on the upper surface of the first layer, the upper surface of the third layer, and the upper surface of the fifth layer. The second electrodes 30 are formed in the comb-shaped configuration so that they are disposed on the upper surface of the second layer and the upper surface of the fourth layer.

FIG. 28 is illustrative of the following case. That is, the piezoelectric/electrostrictive layer 26 has the five-layered structure as well. The first electrodes 28 are formed in the comb-shaped configuration so that they are disposed on the upper surface of the first layer, the upper surface of the third layer, and the upper surface of the fifth layer. The second electrodes 30 are formed in the comb-shaped configuration so that they are disposed on the lower surface of the first layer, the upper surface of the second layer, and the upper surface of the fourth layer.

In the case of the structures described above, it is possible to suppress the increase in number of terminals by connecting the mutual first electrodes 28 and the mutual second electrodes 30 with each other to be common.

Therefore, it is possible to suppress the increase in size, which would be otherwise caused when the stacked type piezoelectric/electrostrictive element 24 is used.

As described above, the driving force of the actuator section 204 is increased by using the stacked type piezoelectric/electrostrictive element 24, and thus it is possible to obtain the large displacement. Further, it is possible to realize the high resonance frequency by increasing the rigidity of the piezoelectric/electrostrictive device 10B itself. Thus, it is easy to achieve the high speed of the displacement action.

When the number of stages is increased, it is possible to increase the driving force of the actuator section 204. However, the electric power consumption is also increased in accordance therewith. Therefore, when the present invention is carried out, the number of stages may be appropriately determined depending on the way of use and the state of use. In the case of the piezoelectric/electrostrictive device 10B according to the second embodiment, the width of the thin plate section 16a, 16b (distance in the Y axis direction) is basically unchanged, even when the driving force of the actuator section 204 is increased, owing to the use of the stacked type piezoelectric/electrostrictive element 24.

Therefore, the device is extremely preferred to make application, for example, to the actuator for the purpose of the ringing control and the positioning of the magnetic head

for the hard disk to be used in an extremely narrow gap.

The stacked type piezoelectric/electrostrictive element 24 is preferably formed at the following position with respect to the thin plate section 16a. That is, the forward end 208 of the multilayered member for constructing the stacked type piezoelectric/electrostrictive element 24 is disposed at the position not including at least the fixation section 22 as viewed in plan view (position included in the hole 12 formed between the movable section 20 and the fixation section 22 in the example shown in FIG. 25). The rearward end 209 of the multilayered member for constructing the stacked type piezoelectric/electrostrictive element 24 is disposed at the position including at least the fixation section 22 as viewed in plan view. The end 28a of the electrode 28 is formed at the position including at least the fixation section 22 as viewed in plan view, and the end 30a of the electrode 30 is formed at the position not including at least the fixation section 22 as viewed in plan view (position included in the hole 12 formed between the movable section 20 and the fixation section 22 as well in the example shown in FIG. 25).

The voltage is applied to the pair of electrodes 28, 30 via ends (hereinafter referred to as "terminals 28b, 30b") of the respective electrodes 28, 30 formed on the fifth layer of the piezoelectric/electrostrictive layer 30. The respective terminals 28b, 30b are formed to be separated from each other in such a degree that they can be

electrically insulated from each other.

The spacing distance D_k between the terminals 28b, 30b is preferably not less than 20 μm , and it is preferably not less than 50 μm when the thickness of the terminal 28b, 30b is 1 μm to 30 μm . The terminals 28b, 30b may be made of the same material as that of the internal electrodes 28, 30, or they may be made of a material different therefrom. For example, the same material may be used when the terminals 28b, 30b are sintered simultaneously with the piezoelectric/electrostrictive layer 26. The different materials may be used when the sintering is performed separately.

It is preferable for the end surface electrodes 28c, 30c that the internal electrodes 28, 30 and the piezoelectric/electrostrictive layer 26 are sintered, and then their end surfaces are subjected to, for example, grinding and polishing to effect the electric connection between the internal electrodes and the end surface electrodes. The material of the end surface electrodes 28c, 30c may be the same as, or different from that of the internal electrodes 28, 30. For example, it is preferable that platinum paste is utilized for the internal electrodes 28, 30, gold resinate is utilized for the outer surface electrode 28d, and gold paste is utilized for the end surface electrodes 28c, 30c and the terminals 28b, 30b. However, it is also possible to adopt approximately the same construction as that of the piezoelectric/electrostrictive

device according to the first embodiment described above.

In this arrangement, the piezoelectric/electrostrictive device 10B can be independently fixed by utilizing the surface other than the surface on which the terminals 28b, 30b are arranged. As a result, it is possible to obtain high reliability for both of the fixation of the piezoelectric/electrostrictive device 10B and the electric connection between the circuit and the terminals 28b, 30b. In this arrangement, the electric connection between the terminals 28b, 30b and the circuit is made, for example, by means of the flexible printed circuit, the flexible flat cable, and the wire bonding.

As described above, in the piezoelectric /electrostrictive device 10B according to the second embodiment, the actuator section 204 is constructed by securing the stacked type piezoelectric/electrostrictive element 24 onto the thin plate section 16a made of metal by the aid of the adhesive 202. Therefore, it is possible to greatly displace the thin plate section 16a (and 16b) even when the areal size of the stacked type piezoelectric/electrostrictive element 24 is not widened as viewed in plan view. Further, the thin plate section 16a (and 16b) is made of metal. Therefore, the device is excellent in strength and toughness, and it is possible to respond to the quick displacement action as well.

In other words, in the second embodiment, it is possible to sufficiently respond to the variation of

environment of use and the severe state of use. The device is excellent in shock resistance. It is possible to realize the long life time of the piezoelectric/electrostrictive device 10B, and it is possible to improve the handling performance of the piezoelectric/electrostrictive device 10B. Further, the thin plate section can be greatly displaced at a relatively low voltage. The rigidity of the thin plate section 16a (and 16b) is high, the film thickness of the actuator section 204 is thick, and the rigidity of the actuator section 204 is high. Accordingly, it is possible to achieve the realization of the high speed (realization of the high resonance frequency) of the displacement action of the thin plate section 16a (and 16b).

Usually, in order to drive, at a high speed, the actuator section 204 constructed by combining the thin plate section 16a and the piezoelectric/electrostrictive element 24 which makes strain deformation, it is necessary to increase the rigidity of the actuator section 204. In order to obtain large displacement, it is necessary to decrease the rigidity of the actuator section 204.

However, in the piezoelectric/electrostrictive device 10B according to the second embodiment, the thin plate sections 16a, 16b, which constitute the actuator section 204, are opposed to one another to provide the pair of thin plate sections 16a, 16b. The fixation section 22 is secured by the adhesive 200 between the respective rearward ends of the pair of thin plate sections 16a, 16b to construct the

multiple stage structure of the piezoelectric/electrostrictive element 24. The position of the piezoelectric/electrostrictive element 24, the material and the size of the constitutive members are appropriately selected to construct the piezoelectric/electrostrictive device 10B. Therefore, it is possible to effect the both of the contradicting characteristics described above. When the object, which has the substantially the same degree of size as that of the fixation section 22, intervenes between the open ends of the pair of thin plate sections 16a, 16b, the minimum resonance frequency of the structure is not less than 20 kHz. Further, the relative displacement amount concerning the object and the fixation section 22 can be not less than 0.5 μm at a substantial applied voltage of 30 V at a frequency which is not more than 1/4 of the resonance frequency.

As a result, it is possible to greatly displace the pair of thin plate sections 16a, 16b. Further, it is possible to achieve the realization of the high speed (realization of the high resonance frequency) of the displacement action of the piezoelectric/electrostrictive device 10B, especially of the pair of thin plate sections 16a, 16b.

In the piezoelectric/electrostrictive device 10B according to the second embodiment, the minute displacement of the piezoelectric/electrostrictive element 24 is amplified into the large displacement action by utilizing

the bending of the thin plate sections 16a, 16b, and it is transmitted to the movable section 20. Therefore, the movable section 20 can be greatly displaced with respect to the major axis m (see FIG. 14) of the piezoelectric /electrostrictive device 10B.

In the piezoelectric/electrostrictive device 10B according to the second embodiment, it is unnecessary that all of the parts are formed with the piezoelectric /electrostrictive material which is a fragile material having a relatively heavy weight. Therefore, the device has the following advantages. That is, the device has the high mechanical strength, and it is excellent in handling performance, shock resistance, and moisture resistance. Further, the operation of the device is scarcely affected by harmful vibration (for example, noise vibration and remaining vibration during high speed operation).

Further, as shown in FIG. 24, the forward ends of the pair of thin plate sections 16a, 16b are the open ends. Accordingly, when various members or parts are attached to the piezoelectric/electrostrictive device 10B, it is possible to utilize the forward ends of the pair of thin plate sections 16a, 16b. The member or the part can be attached in such a way that the member or the part is interposed by the forward ends. In this case, it is possible to provide a large attachment area for the member or the part, and it is possible to improve the attachment performance for the part. Further, the member or the part

to be attached is consequently included in the pair of thin plate sections 16a, 16b. Therefore, it is possible to decrease the size of the piezoelectric/electrostrictive device in the Y direction after attaching the member or the part. Thus, the device is advantageous to realize the compact size.

Of course, as shown in FIG. 25, when the movable section 20 is secured between the respective forward ends of the pair of thin plate sections 16a, 16b, then various members or parts are secured, for example, by the aid of an adhesive to the first principal surface of the movable section 20.

In the second embodiment, the forward end 208 of the multilayered member for constructing the stacked type piezoelectric/electrostrictive element 24 is disposed at the position not including at least the fixation section 22 as viewed in plan view. The rearward end of the multilayered member is disposed at the position including at least the fixation section 22 as viewed in plan view. The end 28a of the electrode 28 is disposed at the position including at least the fixation section 22 as viewed in plan view. The end 30a of the electrode 30 is disposed at the position not including the fixation section 22 as viewed in plan view.

For example, if the respective ends of the pair of electrodes 28, 30 are formed at the position included in the movable section 20, then it is feared that the displacement action of the pair of thin plate sections 16a, 16b is

restricted by the stacked type
piezoelectric/electrostrictive element 24, and it is
impossible to obtain the large displacement. However, in
the second embodiment, the foregoing positional relationship
is adopted. Therefore, it is possible to avoid the
inconvenience of the restriction of the displacement action
of the movable section 20, and it is possible to increase
the displacement amount of the pair of thin plate sections
16a, 16b.

Next, explanation will be made for preferred
illustrative constructions of the piezoelectric
/electrostrictive device 10B according to the second
embodiment. The preferred illustrative constructions are
approximately the same as those of the piezoelectric
/electrostrictive device according to the first embodiment
described above. Therefore, explanation will be made for
only the preferred illustrative constructions inherent in
the piezoelectric/electrostrictive device 10B according to
the second embodiment.

At first, in the piezoelectric/electrostrictive device
10B according to the second embodiment, the shape of the
device 10B is not the plate-shaped configuration like the
conventional one. When the movable section 20 is provided,
the movable section 20 and the fixation section 22 form the
rectangular parallelepiped-shaped configuration. The pair
of thin plate sections 16a, 16b are provided so that the
side surfaces of the movable section 20 and the fixation

section 22 are continuous to give the rectangular annular configuration. Therefore, it is possible to selectively enhance the rigidity of the piezoelectric/electrostrictive device 10B in the Y axis direction.

5 That is, in the piezoelectric/electrostrictive device 10B, it is possible to selectively generate only the action of the movable section 20 in the plane (in the XZ plane). It is possible to suppress the action of the pair of thin plate sections in the YZ plane (action in the so-called swaying direction).

10 It is desirable that the thin plate sections 16a, 16b are made of metal. The fixation section 22 and the movable section 20 may be made of materials of different types, but they are more preferably made of metal. For example, organic resin, brazing material, or solder may be used to glue the thin plate sections 16a, 16b to the fixation section 22 and glue the thin plate sections 16a, 16b to the movable section 20. However, it is more preferable to form an integrated structure formed by diffusion joining or
20 welding between metal materials. It is more desirable to use metal subjected to the cold rolling process, because of the high strength owing to the presence of a great degree of dislocation.

25 In the second embodiment, the stacked type piezoelectric/electrostrictive element 24 is formed on only one thin plate section 16a. Therefore, the device can be produced inexpensively as compared with a device (modified

embodiment) in which the stacked type piezoelectric /electrostrictive elements 24a, 24b are formed on the pair of thin plate sections 16a, 16b respectively as shown in FIG. 30. Further, in the second embodiment, when the observation is made in a state in which the movable section 20 is secured, then the thin plate section 16a having the large thickness, on which the stacked type piezoelectric /electrostrictive element 24 is formed, is directly displaced, and the thin plate section 16b having the thin thickness, on which the stacked type piezoelectric/electrostrictive element 24 is not formed, is displaced in cooperation therewith. Accordingly, it is possible to cause the displacement to a greater extent.

The formation of the stacked type piezoelectric /electrostrictive element 24 on the thin plate section 16a can be realized by gluing the stacked type piezoelectric /electrostrictive element 24 to the thin plate section 16a, for example, with organic resin, brazing material, or solder. When the element is glued at a low temperature, it is desirable to use organic resin. When the element is allowed to be glued at a high temperature, it is preferable to use, for example, brazing material, solder, and glass. However, the coefficient of thermal expansion is generally differs among the thin plate section 16a, the stacked type piezoelectric/electrostrictive element 24, and the adhesive 202. Therefore, it is desirable that the gluing temperature is low in order not to generate any stress in the stacked

type piezoelectric/electrostrictive element 24 due to the difference in coefficient of thermal expansion. In the case of organic resin, the gluing can be generally effected at a temperature of not more than 180 °C. Therefore, organic resin is preferably adopted. More preferably, it is desirable to use a room temperature setting adhesive. When the fixation of the thin plate section 16a, 16b and the piezoelectric/electrostrictive element 24 is performed simultaneously with, or after the fixation of the movable section 20, the fixation section 22 and the thin plate section 16a, 16b, if the fixation section 22 or the movable section 20 has the open type structure, then it is possible to effectively reduce the strain which would be otherwise caused between the different types of materials.

In order not to exert any thermal stress on the stacked type piezoelectric/electrostrictive element 24, it is preferable that the stacked type piezoelectric /electrostrictive element 24 is glued to the thin plate section 16a with organic resin, and the fixation is performed in separate steps for the thin plate sections 16a, 16b, the fixation section 22, and the movable section 20.

As shown in FIG. 31, when the part of the piezoelectric/electrostrictive element 24 is located at the fixation section 22, it is preferable that $(1 - L_b/L_a)$ is not less than 0.4, and more preferably 0.5 to 0.8 provided that L_a represents a shortest distance concerning the pair of thin plate sections 16a, 16b between a boundary portion

with respect to the movable section 20 and a boundary portion with respect to the fixation section 22, and L_b represents a shortest distance of distances from the boundary portion between the thin plate section 16a and the movable section 20 to any one of the ends 28a, 30a of the pair of electrodes 28, 30 of the stacked type piezoelectric/electrostrictive element 24. If $(1 - L_b/L_a)$ is not more than 0.4, it is impossible to make large displacement. When $(1 - L_b/L_a)$ is 0.5 to 0.8, it is easy to successively achieve both of the displacement and the resonance frequency. However, in this case, it is more appropriate to use a structure in which the stacked type piezoelectric/electrostrictive element 24 is formed on only one thin plate section 16a. This fact also holds when the part of the piezoelectric/electrostrictive element 24 is located at the movable section 20.

It is preferable that the total thickness of the stacked type piezoelectric/electrostrictive element 24 is not less than 40 μm . If the total thickness is less than 40 μm , it is difficult to glue the stacked type piezoelectric/electrostrictive element 24 to the thin plate section 16a. It is desirable that the total thickness is not more than 180 μm . If the total thickness exceeds 180 μm , it is difficult to realize a compact size of the piezoelectric/electrostrictive device 10B.

As for the portion of the stacked type piezoelectric/electrostrictive element 24 to make contact with the thin

plate section 16a, when the metal such as brazing material and solder layer is used as the adhesive 202, it is preferable that the electrode layer exists at the lowermost layer in view of the wettability as shown in FIGS. 28 and 29. FIGS. 28 and 29 show the state in which the electrode film for constructing the second electrode 30 is arranged.

When the stacked type piezoelectric/electrostrictive element 24 as shown in FIG. 26 and FIG. 28 is glued to the thin plate section 16a by the aid of the metal layer such as the brazing material and the solder layer, it is preferable to chamfer the angular portion at which at least one electrode 28 exists, of the lower surface of the stacked type piezoelectric/electrostrictive element 24 as shown in FIG. 27 and FIG. 29, because of the following reason. That is, it is intended to prevent the pair of electrodes 28, 30 from formation of short circuit which would be otherwise formed via the metal layer and the thin plate section 16a. FIG. 27 is illustrative of a case in which two angular portions, at which the pair of electrodes 28, 30 exist, are chamfered. FIG. 29 is illustrative of a case in which an angular portion, at which the first electrode 28 exists, is chamfered.

Those preferably used as the adhesive 202 for gluing the stacked type piezoelectric/electrostrictive element 24 to the thin plate section 16a and the adhesive 200 for gluing the thin plate sections 16a, 16b, for example, to the fixation section 22 include two-part type reactive adhesives

such as those based on epoxy and isocyanate, instantaneous adhesives such as those based on cyanoacrylate, and hot melt adhesives such as those based on ethylene-vinyl acetate copolymer. Especially, it is preferable to use those having Shore D hardness of not less than 80 as the adhesive 202 for gluing the stacked type piezoelectric/electrostrictive element 24 to the thin plate section 16a.

It is desirable that an organic adhesive containing a filler such as metal and ceramics is used as the adhesive 202 for gluing the thin plate section 16a, 16b and the piezoelectric/electrostrictive element 24 (24a, 24b). In this case, it is desirable that the thickness of the adhesive 202 is not more than 100 μm , because of the following reason. That is, when the filler is contained, then the substantial thickness of the resin component is decreased, and it is possible to maintain a high hardness of the adhesive.

It is also preferable to use inorganic adhesives as the adhesive 200, 202, other than the organic adhesives described above. The inorganic adhesive includes, for example, glass, cement, solder, and brazing material.

On the other hand, as for the shape and the material quality for the thin plate sections 16a, 16b, it is enough to have the flexibility, with the mechanical strength of such a degree that no breakage is caused due to bending deformation. Metal is preferably adopted. In this case, as described above, it is preferable to use a metal material

which has the flexibility and which is capable of the bending displacement. Specifically, it is preferable to use a metal material which has a Young's modulus of not less than 100 GPa.

5 Preferably, it is desirable that the thin plate section 16a, 16b is made of an iron-based material such as various spring steel materials, marageing stainless steel materials, and stainless steel materials including, for example, austenite-based stainless steel materials such as SUS301, SUS304, AISI653, and SUH660, ferrite-based stainless steel materials such as SUS430 and SUS434, maltensite-based stainless steel materials such as SUS410 and SUS630, and semiaustenite-based stainless steel materials such as SUS631 and AISI632. Alternatively, it is desirable that the thin plate section 16a, 16b is made of a non-ferrous material such as superelastic titanium alloy represented by titanium-nickel alloy, brass, cupronickel, aluminum, tungsten, molybdenum, beryllium copper, phosphor bronze, nickel, nickel-iron alloy, and titanium.

20 Next, explanation will be made with reference to FIGS. 32 to 40 for several production methods for manufacturing the piezoelectric/electrostrictive device 10B according to the second embodiment.

25 In the third production method, as shown in FIG. 32, a rectangular hole 252 having a size of width: 1 mm \times length: 8 mm is firstly bored through a central portion of a stainless steel plate 250 having a size of width: 1.6 mm \times

length: 10 mm × thickness: 0.9 mm to manufacture a substrate 258 having a rectangular annular structure with support sections 254, 256 arranged on both sides of the hole 252 respectively.

5 After that, as shown in FIG. 33, a first stainless steel thin plate 260 having a size of width: 1.6 mm × length: 10 mm × thickness: 0.05 and a second stainless steel thin plate 262 having a size of width: 1.6 mm × length: 10 mm × thickness: 0.02 (see FIG. 35) are prepared.

10 After that, as shown in FIG. 33, the adhesive 202 (for example, an adhesive made of epoxy resin) is formed by the screen printing on a portion of the upper surface of the first stainless steel thin plate 260 on which the stacked type piezoelectric/electrostrictive element 24 is formed. After that, as shown in FIG. 34, the stacked type piezoelectric/electrostrictive element 24 is glued to the first stainless steel thin plate 260 by the aid of the adhesive 202.

15 After that, as shown in FIG. 35, the adhesive 200 (for example, an adhesive made of epoxy resin) is formed by the screen printing on the respective support sections 254, 256 of the substrate 258.

20 After that, the first stainless steel thin plate 260, on which the stacked type piezoelectric/electrostrictive element 24 has been already formed, is glued to the first surface of each of the support sections 254, 256 by the aid of the adhesive 200. The second stainless steel thin plate

262 is glued to the second surface of each of the support sections 254, 256 by the aid of the adhesive 200. Further, the pressure is applied to the first and second stainless steel thin plates 260, 262 in a direction to interpose the substrate 258 to manufacture a master device block 270 shown in FIG. 36. The applied pressure is 0.1 to 10 kgf/cm².

After that, as shown in FIG. 36, the master device block 270 is cut into portions along cutting lines 272 to divide the block into the individual piezoelectric /electrostrictive devices 10B as shown in FIG. 25. The cutting process was performed by using a wire saw having a wire diameter of 0.1 mm and a spacing distance of 0.2 mm. When the wire saw is used, it is possible to prescribe substantially the same size for the width of the piezoelectric/electrostrictive element 24, the width of the thin plate section 16a, and the width of the adhesives 200, 202, although these components are made of different materials respectively.

Next, in the fourth production method, as shown in FIG. 37, a rectangular hole 252 having a size of width: 1 mm × length: 8 mm is bored through a central portion of a stainless steel plate 250 having a size of width: 1.6 mm × length: 10 mm × thickness: 0.9 mm to manufacture a substrate 258 having a rectangular annular structure with support sections 254, 256 arranged on both sides of the hole 252 respectively.

After that, the adhesive 200 (for example, an adhesive

made of epoxy resin) is formed by the screen printing on the respective support sections 254, 256 of the substrate 258.

After that, as shown in FIG. 38, a first stainless steel thin plate 260 having a size of width: 1.6 mm × length: 10 mm × thickness: 0.05 is glued to the first surface of each of the support sections 254, 256 by the aid of the adhesive 200. A second stainless steel thin plate 262 having a size of width: 1.6 mm × length: 10 mm × thickness: 0.02 is glued to the second surface of each of the support sections 254, 256 by the aid of the adhesive 200. Further, the pressure is applied to the first and second stainless steel thin plates 260, 262 in a direction to interpose the substrate 258. The applied pressure is 0.1 to 10 kgf/cm².

After that, the adhesive 202 (for example, an adhesive made of epoxy resin) is formed by the screen printing on a portion of the upper surface of the first stainless steel thin plate 260 on which the stacked type piezoelectric /electrostrictive element 24 is formed.

After that, as shown in FIG. 40, the stacked type piezoelectric/electrostrictive element 24 is glued to the first stainless steel thin plate 260 by the aid of the adhesive 202 to manufacture a master device block 270.

After that, as shown in FIG. 36, the master device block 270 is cut into portions along cutting lines 272 to divide the block into the individual piezoelectric /electrostrictive devices 10B as shown in FIG. 25.

A part (for example, the fixation section 22) of the piezoelectric/electrostrictive device 10B produced in accordance with the first and second production methods was fixed. A bias voltage of 15 V and a sine wave voltage of ± 15 V were applied between the pair of electrodes 28, 30 of the stacked type piezoelectric/electrostrictive element 24 to measure the displacement of the movable section 20. As a result, the displacement was $\pm 1.2 \mu\text{m}$. The frequency was swept with a sine wave voltage of ± 0.5 V to measure the minimum resonance frequency to exhibit the maximum displacement. As a result, the minimum resonance frequency was 50 kHz.

In the third and fourth production methods described above, the substrate 258 is constructed to have the rectangular annular structure having the support section 254 to be formed into the movable section 20 thereafter and the support section 256 to be formed into the fixation section 22 thereafter. Alternatively, as shown in FIG. 41, a rectangular annular structure is also available, in which a hole 252 is widened to have a frame-shaped section 254a for supporting first and second stainless steel thin plates 260, 262 (section for substantially defining the thickness of a portion to allow at least the movable section 20 to intervene thereafter) and a support section 256 to be formed into the fixation section 22 thereafter.

In this case, the substrate 258 is secured by the aid of the adhesive 200 so that the substrate 258 is interposed

between the first and second stainless steel thin plates 260, 262 to manufacture a master device block 270 similar to one shown in FIG. 36, followed by being cut along cutting lines 272 as shown in FIG. 36. Accordingly, as shown in FIG. 44, for example, it is possible to produce a piezoelectric/electrostrictive device in which the movable section 20 does not exist between the forward ends of the thin plate sections 16a, 16b.

Next, explanation will be made with reference to FIGS. 42 to 46 for a fifth production method which is different from the third and fourth production methods described above.

The fifth production method is also applicable to a case in which support sections 254, 256 are glued to a first stainless steel thin plate 260 and a second stainless steel thin plate 262 to manufacture a master device block 270 in the same manner as in the third and fourth production methods described above, followed by being divided into individual piezoelectric/electrostrictive devices. The fifth production method is also applicable to a case in which the piezoelectric/electrostrictive device 10B is produced by securing the fixation section 22 (and the movable section 20, if desirable) prepared separately to a unit prepared separately as each actuator section 204 comprising the stacked type piezoelectric/electrostrictive element 24a, 24b formed on the thin plate sections 16a, 16b.

In the following description, the support section 254

to be formed into the movable section 20 thereafter and the movable section 20 are conveniently referred to as "movable section 20", the support section 256 to be formed into the fixation section 22 thereafter and the fixation section 22 are conveniently referred to as "fixation section 22", and the first and second stainless steel thin plates 260, 262 to be formed into the thin plate sections 16a, 16b thereafter and the thin plate sections 16a, 16b are conveniently referred to as "thin plate sections 16a, 16b".

As shown in FIG. 42, when the thin plate sections 16a, 16b are glued by the aid of adhesive 200 to the movable section 20 and the fixation section 22 respectively, if the adhesive having fluidity is used, then it is preferable to provide bumps 280am, 280an, 280bm, 280bn for the respective thin plate sections 16a, 16b in order to define the places for forming the adhesive 200. Of course, when the adhesive having high viscosity is used, it is unnecessary to provide such a bump. The bumps 280am, 280an, 280bm, 280bn may be also formed by stacking plate-shaped members.

FIG. 43 is illustrative of a case in which the adhesive having high fluidity is used as the adhesive 200 for gluing the movable section 20 and the respective thin plate sections 16a, 16b, and the adhesive having high viscosity is used as the adhesive 200 for gluing the fixation section 22 and the respective thin plate sections 16a, 16b, wherein the bumps 280an, 280bn are provided at portions of the thin plate sections 16a, 16b for which the adhesive having high

fluidity is used.

FIG. 44 is illustrative of a case in which the adhesive having high viscosity is used as the adhesive 200 for gluing the fixation section 22, and the thin plate sections 16a, 16b, depicting a structure in which the bump 280am, 280an, 280bm, 280bn as described above is not provided.

FIG. 45 is illustrative of a case in which the adhesive having high fluidity is commonly used as the adhesive 200 for gluing the fixation section 22, the movable section 20, and the thin plate sections 16a, 16b, especially depicting an example which is provided with projections 282am, 282an, 282bm, 282bn for comparting regions for forming the adhesive 200 on the thin plate sections 16a, 16b.

As shown in FIG. 46 concerning the example shown in FIG. 42, it is also preferable that each of the size of the fixation section 22 and the movable section 20, especially the areal size of the surface opposed to the bump 280am, 280bm of each of the thin plate sections 16a, 16b concerning the fixation section 22 is made to be larger than the areal size of the bump 280am, 280bm. Also, the areal size of a surface opposed to the bump 280an, 280bn of each of the thin plate sections 16a, 16b concerning the movable section 20 is made to be larger than the areal size of the bump 280an, 280bn. Accordingly, the substantial driving portion (portion between the bumps 280am and 280an and portion between the bumps 280bm and 280bn) of the thin plate sections 160a, 160b can be defined by the bump 280am, 280an,

280bm, 280bn. As shown in FIG. 42, when the areal size of the surface opposed to the bump 280am, 280bm of each of the thin plate sections 16a, 16b concerning the fixation section 22 is made to be substantially the same as the areal size of the bump 280am, 280bm, and the areal size of the surface opposed to the bump 280an, 280bn of each of the thin plate sections 16a, 16b concerning the movable section 20 is made to be substantially the same as the areal size of the bump 280an, 280bn, it is feared that the dispersion in size concerning the fixation section 22 and the bump 280am, 280bm, and the dispersion in size concerning the movable section 20 and the bump 280an, 280bn affect the length of the substantial driving portion. FIG. 46 is illustrative of the case in which the size of the fixation section 22 is increased toward the movable section 20. Alternatively, it is also preferable that the size of the fixation section 22 is increased outwardly oppositely to the direction toward the movable section 20. Similar structural variations are available with regard to the movable section 20.

In FIGS. 42 to 46, the bumps 280am, 280bm, 280an, 280bn or the projections 282am, 282bm, 282an, 282bn and the thin plate sections 16a, 16b are integrated with the thin plate sections. However, these components may be provided by stacking appropriately processed plates by the aid of an adhesive, in the same manner as in FIG. 19 or FIG. 23. In the case of the provision by means of the integration, the bumps 280am, 280bm, 280an, 280bn or the projections 282am,

282bm, 282an, 282bn can be integrally provided for the thin plate sections 16a, 16b formed as a result of etching or cutting a plate member.

5 The embodiment described above is illustrative of the case in which the adhesive 200, 202 is formed by means of the screen printing. Alternatively, it is possible to use, for example, dipping, dispenser, and transfer.

10 Next, explanation will be made with reference to FIGS. 47 to 52 for various illustrative constructions concerning the adhesive 202 which intervenes, for example, between the thin plate section 16a and the stacked type piezoelectric /electrostrictive element 24 and the adhesive 200 which intervenes between the thin plate sections 16a, 16b, the movable section 20, and the fixation section 22.

15 At first, in the first technique shown in FIG. 47, a large number of holes 290 are provided through the thin plate section 16a. The stacked type piezoelectric /electrostrictive element 24 is glued to a portion at which the holes 290 are provided, by the aid of the adhesive 202.
20 In this arrangement, the adhesive 202 enters the inside of the holes 290. Therefore, the adhesion area is substantially increased, and it is possible to use a thin thickness of the adhesive 202. It is preferable that the thickness of the adhesive 202 is not more than 5 % of the
25 total thickness of the stacked type piezoelectric/electrostrictive element 24 and not less than a thickness of such a degree that the thermal stress due to

the difference in coefficient of thermal expansion between the thin plate section 16a and the adhesive 202 can be absorbed.

It is preferable that the diameter of the hole 290 is 5 μm to 100 μm . The arrangement pattern may be either a matrix form or a zigzag arrangement. Of course, a plurality of holes 290 may be arranged in one array. It is preferable that the arrangement pitch of the holes 290 is 10 μm to 200 μm . Alternatively, recesses (bores) may be used in place of the holes 290. In this arrangement, it is preferable that the diameter of the bore is 5 μm to 100 μm . The arrangement pattern may be either a matrix form or a zigzag arrangement. It is preferable that the arrangement pitch of the bores is 10 μm to 200 μm . Especially, in the case of the recess (bore), for example, it is also preferable to use a rectangular configuration as viewed in plan view with its opening area which is slightly smaller than the projection area of the piezoelectric/electrostrictive element 24 onto the thin plate section 16a. Those adoptable as the technique for forming the holes 290 or the bores in the thin plate section 16a include, for example, etching, laser machining, stamping, drill machining, electric discharge machining, and ultrasonic machining.

In the second technique shown in FIG. 48, the surface 292 of a portion of the thin plate section 16a, on which a stacked type piezoelectric/electrostrictive element 24 is formed, is roughened by means of the blast treatment, the

etching treatment, or the plating treatment. In this arrangement, the lower surface 294 of the stacked type piezoelectric/electrostrictive element 24 is also roughened. Accordingly, the adhesion area is substantially increased. Therefore, it is possible to use a thin thickness of the adhesive 202.

FIG. 48 is illustrative of the case in which the surface of the thin plate section 16a and the lower surface of the piezoelectric/electrostrictive element 24 (surface opposed to the thin plate section 16a) are roughened. However, it is enough that the surface having the small adhesion force with respect to the adhesive 202 is roughened. A sufficient effect is obtained, for example, even when only the surface of the thin plate section 16a is roughened. The surface roughness is preferably $R_a = 0.1 \mu\text{m}$ to $5 \mu\text{m}$, and more preferably $0.3 \mu\text{m}$ to $2 \mu\text{m}$, for example, as estimated by the center line average roughness.

In the third technique shown in FIG. 49, a curvature 296 is provided for the stick-out shape of the adhesive 200, especially for the stick-out shape of the adhesive 200 toward the hole (hole 252 of the substrate 258) formed by the inner walls of the thin plate sections 16a, 16b, the inner wall 20a of the movable section 20, and the inner wall 22a of the fixation section 22. In this arrangement, it is preferable that the radius of curvature is not less than 0.05 mm and up to the extent that the stick-out shape is linear, or the stick-out shape includes a linear portion.

The formation of the curvature 296 for the stick-out portion of the adhesive 200 can be realized, for example, by inserting a cylindrical core member into the hole 252 before curing the adhesive 200. Practically, the control is made based on the use of the application amount and the physical property of the adhesive 200 so that the stick-out shape is at least not convex.

Accordingly, the inner wall 20a of the movable section 20, the inner wall 22a of the fixation section 22, and the inner walls of the respective thin plate sections 16a, 16b are also used as the adhesion surfaces. Therefore, the adhesion area is increased, and it is possible to increase the adhesion strength. Further, it is possible to effectively disperse the concentration of the stress on the joined portions (angular portions) between the inner wall 22a of the fixation section 22 and the inner walls of the respective thin plate sections 16a, 16b.

In the fourth technique shown in FIG. 50, angular portions opposed to the fixation section 22, of angular portions of the movable section 20, and/or angular portions opposed to the movable section 20, of angular portions of the fixation section 22 are chamfered respectively to form tapered surfaces 298. The stick-out amount of the adhesive 200 can be stabilized by appropriately adjusting the radius of curvature and the angle of the chamfering. It is possible to suppress the local dispersion of the adhesion strength, and it is possible to improve the yield.

The following method is preferably used to chamfer the angular portion. That is, for example, the cutting and the polishing are performed beforehand for the portions to be formed into the angular portions of the first support section 264 and the second support section 256 to form the tapered surfaces 298 before the assembling. Of course, the chamfering may be performed after the assembling. In this case, for example, the laser machining, the ultrasonic machining, or the sandblast is preferably adopted.

The fifth technique shown in FIG. 51 relates to the punching out process which is usually performed, for example, when the thin plate sections 16a, 16b are manufactured. In this case, burrs 300 are formed. The formed burrs 300 may be removed before the assembling. However, they may be allowed to remain as they are. In this case, it is preferable that the directions of the formed burrs 300 are regulated, for example, in consideration of the handling and the adhesion directions of the respective members as well as the easiness of control of the amount of the adhesive. The example shown in FIG. 51 is illustrative of a state in which the burrs 300 of the thin plate sections 16a, 16b are directed outwardly.

In the sixth technique shown in FIG. 52, the thickness of the first thin plate section 16a is made to be larger than the thickness of the second thin plate section 16b as described above. In the case of the use as the actuator section 204 and the sensor, the stacked type

piezoelectric/electrostrictive element 24 is preferably formed on the first thin plate section 16a.

Other techniques are also available. For example, when the stacked type piezoelectric/electrostrictive element 24 is glued to the thin plate section 16a, 16b by the aid of the adhesive 202, for example, it is preferable that a ZrO_2 layer is allowed to intervene as an underlying layer for the lower surface of the stacked type piezoelectric /electrostrictive element 24.

When the stainless steel thin plates 260, 262 (for example, see FIG. 33) are used as the thin plate sections 16a, 16b, it is preferable that the longitudinal direction of the thin plate sections 16a, 16b is approximately coincident with the direction of the cold rolling applied to the stainless steel thin plates 260, 262.

It is preferable that the piezoelectric /electrostrictive layer 26 for constructing the stacked type piezoelectric/electrostrictive element 24 is stacked in about three layers to ten layers.

The piezoelectric/electrostrictive devices 10A, 10B described above can be utilized as the active device including, for example, various transducers, various actuators, frequency region functional parts (filters), transformers, vibrators, resonators, oscillators, and discriminators for the communication and the power generation, as well as the sensor element for various sensors including, for example, ultrasonic sensors,

acceleration sensors, angular velocity sensors, shock sensors, and mass sensors. Especially, the piezoelectric /electrostrictive devices 10A, 10B described above can be preferably utilized for various actuators to be used for the mechanism for adjusting the displacement and the positioning and for adjusting the angle for various precision parts such as those of optical instruments and precision mechanical equipments.

It is a matter of course that the piezoelectric /electrostrictive device and the method for producing the same according to the present invention are not limited to the embodiments described above, which may be embodied in other various forms without deviating from the gist or essential characteristics of the present invention.

What is claimed is:

1. A piezoelectric/electrostrictive device comprising:

5 at least an actuator section including a piezoelectric/electrostrictive element secured onto thin plate sections made of metal with an adhesive intervening therebetween, wherein:

an actuator section is constructed by a multilayered member including at least three or more actuator films which are composed of piezoelectric/electrostrictive layer and electrode films.

2. The piezoelectric/electrostrictive device according to claim 1, wherein a plurality of electrode films, which are included in said multilayered member for constructing said piezoelectric/electrostrictive element, are stacked alternately, and they are connected so that an identical voltage is applied to every other layer.

3. The piezoelectric/electrostrictive device according to claim 1, wherein said multilayered member is composed of ten or less said actuator film.

4. The piezoelectric/electrostrictive device according to claim 1, wherein said actuator film is formed by means of a thick film printing method.

5. The piezoelectric/electrostrictive device according to claim 1, wherein a positional discrepancy in an in-plane direction, which possibly occurs on a perpendicular projection plane of each of said electrode films disposed as every other layer, is not more than 50 μm .

6. The piezoelectric/electrostrictive device according to claim 1, wherein said adhesive has a thickness of not more than 15 μm .

7. The piezoelectric/electrostrictive device according to claim 1, wherein an underlying layer is formed on a surface of said piezoelectric/electrostrictive element opposed to said thin plate section.

8. The piezoelectric/electrostrictive device according to claim 1, wherein one or more holes or recesses are formed at least at a portion of said thin plate section at which said piezoelectric/electrostrictive element is formed.

9. The piezoelectric/electrostrictive device according to claim 1, wherein at least a portion of a surface of said thin plate section, on which said piezoelectric/electrostrictive element is formed, is a rough surface.

10. A piezoelectric/electrostrictive device comprising a pair of mutually opposing thin plate sections made of metal and a fixation section for supporting said thin plate sections, and including an actuator section with a piezoelectric/electrostrictive element fixed on at least one of said thin plate sections by the aid of an adhesive, wherein:

a stacked type piezoelectric/electrostrictive element is composed of a plurality of piezoelectric/electrostrictive layers and electrode films; and

said electrode films, which contact with upper and lower surfaces of said respective piezoelectric/electrostrictive layers, are alternately led to opposite end surfaces, and end surface electrodes, which electrically connect said respective electrode films alternately led to said opposite end surfaces, are electrically connected to terminals which are provided on a surface of an outermost layer of said piezoelectric/electrostrictive layer and which are arranged while being separated from each other by a predetermined distance respectively.

11. The piezoelectric/electrostrictive device according to claim 10, wherein said stacked type piezoelectric/electrostrictive element has a substantially rectangular parallelepiped-shaped configuration.

12. The piezoelectric/electrostrictive device according to claim 10, wherein said predetermined distance between said terminals is not less than 50 μm .

13. The piezoelectric/electrostrictive device according to claim 10, wherein at least one of said terminals and one of said end surface electrodes are electrically connected with each other with an electrode film having a film thickness which is thinner than those of said terminal and said end surface electrode.

14. A piezoelectric/electrostrictive device comprising:

a pair of mutually opposing thin plate sections, and a fixation section for supporting said thin plate sections; and

one or more piezoelectric/electrostrictive elements arranged on at least one thin plate section of said pair of thin plate sections, wherein:

a minimum resonance frequency of said device structure, which is obtained when an object member having a size substantially equivalent to that of said fixation section exists between open ends of said pair of thin plate sections, is not less than 20 kHz, and a relative displacement amount between said object member and said fixation section is not less than 0.5 μm at a substantial

applied voltage of 30 V at a frequency which is not more than 1/4 of said resonance frequency.

15. The piezoelectric/electrostrictive device
5 according to claim 14, wherein:

an adhesive intervenes between said
piezoelectric/electrostrictive element and said thin plate
section; and

said adhesive has a thickness which is not more than
10 % of a thickness of said piezoelectric/electrostrictive
element.

16. The piezoelectric/electrostrictive device
according to claim 14, wherein:

said one or more piezoelectric/electrostrictive
elements are arranged on one thin plate section of said pair
of thin plate sections; and

a thickness of said one thin plate section is thicker
than a thickness of the other thin plate section.

17. The piezoelectric/electrostrictive device
according to claim 14, wherein:

said object member intervenes between said open ends of
said pair of thin plate sections, and wherein:

a distance concerning said pair of thin plate sections
between a boundary portion with respect to said object
member and a boundary portion with respect to said fixation

section is not less than 0.4 mm and not more than 2 mm; and
each of said pair of thin plate sections has a
thickness which is not less than 10 μm and not more than 100
 μm .

5

18. The piezoelectric/electrostrictive device
according to claim 14, wherein said
piezoelectric/electrostrictive element is constructed by a
multilayered member including at least three or more
actuator films which are composed of
piezoelectric/electrostrictive layers and electrode films.

19. The piezoelectric/electrostrictive device
according to claim 18, wherein said
piezoelectric/electrostrictive element is composed of said
multilayered member having ten or less actuator film.

20. The piezoelectric/electrostrictive device
according to claim 18, wherein said piezoelectric/
electrostrictive layer has a thickness which is not less
than 5 μm and not more than 30 μm .

21. The piezoelectric/electrostrictive device
according to claim 18, wherein said electrode film, which is
interposed at least between said
piezoelectric/electrostrictive layers, has a thickness which
is not less than 0.5 μm and not more than 20 μm .

22. The piezoelectric/electrostrictive device according to claim 18, wherein said plurality of electrode films, which are included in said multilayered member for constructing said piezoelectric/electrostrictive element, are stacked alternately, and they are connected so that an identical voltage is applied to every other layer.

23. The piezoelectric/electrostrictive device according to claim 22, wherein said piezoelectric/electrostrictive element is formed such that only a first piezoelectric/electrostrictive layer, or both of a first electrode film and a first piezoelectric/electrostrictive layer of the multilayered member for constructing the piezoelectric/electrostrictive element make contact with said thin plate section.

24. The piezoelectric/electrostrictive device according to claim 22, wherein one of ends of said electrode layer is formed at a position not including at least said fixation section as viewed in plan view.

25. The piezoelectric/electrostrictive device according to claim 18, wherein an end of said multilayered member for constructing said piezoelectric/electrostrictive element is formed at a position not including at least said fixation section as viewed in plan view.

26. The piezoelectric/electrostrictive device
according to claim 24, wherein:

said object member intervenes between said open ends of
said pair of thin plate sections, and wherein:

$(1 - L_b/L_a)$ is not less than 0.4, provided that:

L_a represents a shortest distance concerning said pair
of thin plate sections between a boundary portion with
respect to said object member and a boundary portion with
respect to said fixation section; and

L_b represents a shortest distance of distances from
said boundary portion between said thin plate section and
one of said object member and said fixation section on which
said multilayered member for constructing said
piezoelectric/electrostrictive element is not formed, to an
end of said electrode film.

27. The piezoelectric/electrostrictive device
according to claim 26, wherein $(1 - L_b/L_a)$ is 0.5 to 0.8.

28. The piezoelectric/electrostrictive device
according to claim 14, wherein said thin plate sections is
composed of metal.

29. The piezoelectric/electrostrictive device
according to claim 28, wherein said thin plate sections is
composed of a metal plate subjected to a cold rolling

process.

30. The piezoelectric/electrostrictive device according to claim 18, wherein an adhesive, which has a thickness of not less than 0.1 μm and not more than 30 μm , is allowed to intervene between said thin plate sections and said multilayered member for constructing said piezoelectric/electrostrictive element.

31. The piezoelectric/electrostrictive device according to claim 30, wherein said adhesive is composed of organic resin.

32. The piezoelectric/electrostrictive device according to claim 30, wherein said adhesive is composed glass, brazing material, or solder.

33. The piezoelectric/electrostrictive device according to claim 30, wherein an underlying layer is formed on a surface of said multilayered member opposed to said thin plate section.

34. The piezoelectric/electrostrictive device according to claim 30, wherein one or more holes or recesses are formed at least at a portion of said thin plate section at which said multilayered member is formed.

35. The piezoelectric/electrostrictive device according to claim 30, wherein at least a portion of a surface of said thin plate section, on which said multilayered member is formed, is a rough surface.

5

36. The piezoelectric/electrostrictive device according to claim 14, wherein an adhesive, which has a thickness of not less than 0.1 μm and not more than 30 μm , is allowed to intervene between said thin plate section and at least said fixation section.

37. The piezoelectric/electrostrictive device according to claim 36, wherein said adhesive is composed of organic resin.

38. The piezoelectric/electrostrictive device according to claim 36, wherein said adhesive is composed of glass, brazing material, or solder.

39. The piezoelectric/electrostrictive device according to claim 36, wherein a stick-out shape of said adhesive, which protrudes from an opposing portion between said thin plate section and at least said fixation section, has a curvature.

40. The piezoelectric/electrostrictive device according to claim 36, wherein:

an object member intervenes between open ends of said pair of thin plate sections, and wherein:

at least an angular portion of said fixation section opposed to said object member is chamfered.

5

41. The piezoelectric/electrostrictive device according to claim 36, wherein:

said thin plate section is manufactured by means of stamping for a metal plate, and wherein:

a burr, which is brought about by said stamping, is directed outwardly.

42. A method for producing a piezoelectric/electrostrictive device comprising:

a pair of mutually opposing thin plate sections, and a fixation section for supporting said thin plate sections; and

one or more piezoelectric/electrostrictive elements arranged on at least one thin plate section of said pair of thin plate sections, said method comprising the steps of:

preparing a plurality of thin plates for forming at least said thin plate sections thereafter, said piezoelectric/electrostrictive element, and a support substrate;

securing said piezoelectric/electrostrictive element to at least one of said thin plates by the aid of a first adhesive;

securing said plurality of thin plates to said support substrate by the aid of a second adhesive to manufacture a master device block including said plurality of thin plates disposed opposingly; and

5 dividing said master device block into a plurality of chips to manufacture individuals of said piezoelectric/electrostrictive devices.

43. The method for producing said piezoelectric/electrostrictive device according to claim 42, wherein:

10 when an object member intervenes between open ends of said pair of thin plate sections of said piezoelectric/electrostrictive device to be produced;

15 said support substrate is a rectangular annular structure having a portion to be formed into at least said object member thereafter, and a portion to be formed into said fixation section thereafter.

20 44. The method for producing said piezoelectric/electrostrictive device according to claim 42, wherein:

 when an object member does not intervene between open ends of said pair of thin plate sections of said piezoelectric/electrostrictive device to be produced;

25 said support substrate is a rectangular annular structure having a portion for supporting said open ends, and a portion to be formed into said fixation section thereafter.

45. The method for producing said piezoelectric/
electrostrictive device according to claim 42, wherein said
first adhesive and/or said second adhesive is organic resin.

5

46. The method for producing said piezoelectric/
electrostrictive device according to claim 42, wherein said
first adhesive and/or said second adhesive is glass, brazing
material, or solder.

47. The method for producing said piezoelectric/
electrostrictive device according to claim 42, wherein said
thin plates and/or said support substrate is made of metal.

48. The method for producing said piezoelectric/
electrostrictive device according to claim 42, wherein:

when said step of dividing said master device block
includes a treatment for cutting said master device block
along predetermined cutting lines;

said cutting is performed in substantially the same
direction as a displacement direction of said pair of thin
plate sections.

49. The method for producing said piezoelectric/
electrostrictive device according to claim 42, further
comprising the step of forming an underlying layer on a
surface of said piezoelectric/electrostrictive element

opposed to said thin plate before securing said piezoelectric/electrostrictive element to said thin plate by the aid of said first adhesive.

5 50. The method for producing said piezoelectric/electrostrictive device according to claim 42, further comprising the step of forming one or more holes or recesses at least at a portion of said thin plate to which said piezoelectric/electrostrictive element is secured.

10 51. The method for producing said piezoelectric/electrostrictive device according to claim 42, further comprising the step of roughen at least a portion of a surface of said thin plate to which said piezoelectric/electrostrictive element is secured.

15 52. The method for producing said piezoelectric/electrostrictive device according to claim 42, further comprising the step of forming a curvature for a stick-out shape of said second adhesive protruding from an opposing portion between said thin plate and said support substrate.

20 53. The method for producing said piezoelectric/electrostrictive device according to claim 42, further comprising the step of chamfering mutually opposing angular portions of said support substrate of said master device block.

54. The method for producing said piezoelectric/
electrostrictive device according to claim 42, further
comprising the step of:

5 manufacturing said thin plate by means of stamping for
a metal plate, wherein:

when said master device block is produced by combining
said thin plate with said support substrate, a burr, which
is brought about on said thin plate due to said stamping, is
directed outwardly to produce said master device block.

55. A method for producing a piezoelectric/
electrostrictive device comprising:

a pair of mutually opposing thin plate sections, and a
fixation section for supporting said thin plate sections;
and

one or more piezoelectric/electrostrictive elements
arranged on at least one thin plate section of said pair of
thin plate sections, said method comprising the steps of:

preparing a plurality of thin plates for forming at
least said thin plate sections thereafter, said
piezoelectric/electrostrictive element, and a support
substrate;

25 securing said plurality of thin plates to said support
substrate by the aid of a second adhesive;

securing said piezoelectric/electrostrictive element to

at least one of said thin plates by the aid of a first adhesive to manufacture a master device block including said plurality of thin plates disposed opposingly; and

dividing said master device block into a plurality of chips to manufacture individuals of said piezoelectric/electrostrictive devices.

56. The method for producing said piezoelectric/electrostrictive device according to claim 55, wherein:

when an object member intervenes between open ends of said pair of thin plate sections of said piezoelectric/electrostrictive device to be produced;

said support substrate is a rectangular annular structure having a portion to be formed into at least said object member thereafter, and a portion to be formed into said fixation section thereafter.

57. The method for producing said piezoelectric/electrostrictive device according to claim 55, wherein:

when an object member does not intervene between open ends of said pair of thin plate sections of said piezoelectric/electrostrictive device to be produced;

said support substrate is a rectangular annular structure having a portion for supporting said open ends, and a portion to be formed into said fixation section thereafter.

58. The method for producing said piezoelectric/
electrostrictive device according to claim 55, wherein said
first adhesive and/or said second adhesive is organic resin.

5 59. The method for producing said piezoelectric/
electrostrictive device according to claim 55, wherein said
first adhesive and/or said second adhesive is glass, brazing
material, or solder.

10 60. The method for producing said piezoelectric/
electrostrictive device according to claim 55, wherein said
thin plates and/or said support substrate is made of metal.

15 61. The method for producing said piezoelectric/
electrostrictive device according to claim 55, wherein:
when said step of dividing said master device block
includes a treatment for cutting said master device block
along predetermined cutting lines;

20 said cutting is performed in substantially the same
direction as a displacement direction of said pair of thin
plate sections.

25 62. The method for producing said piezoelectric/
electrostrictive device according to claim 55, further
comprising the step of forming an underlying layer on a
surface of said piezoelectric/electrostrictive element
opposed to said thin plate before securing said

piezoelectric/electrostrictive element to said thin plate by the aid of said first adhesive.

5 63. The method for producing said piezoelectric/electrostrictive device according to claim 55, further comprising the step of forming one or more holes or recesses at least at a portion of said thin plate to which said piezoelectric/electrostrictive element is secured.

10 64. The method for producing said piezoelectric/electrostrictive device according to claim 55, further comprising the step of roughen at least a portion of a surface of said thin plate to which said piezoelectric/electrostrictive element is secured.

15 65. The method for producing said piezoelectric/electrostrictive device according to claim 55, further comprising the step of forming a curvature for a stick-out shape of said second adhesive protruding from an opposing portion between said thin plate and said support substrate.

20 66. The method for producing said piezoelectric/electrostrictive device according to claim 55, further comprising the step of chamfering mutually opposing angular portions of said support substrate of said master device block.

67. The method for producing said piezoelectric/
electrostrictive device according to claim 55, further
comprising the step of:

manufacturing said thin plate by means of stamping for
a metal plate, wherein:

when said master device block is produced by combining
said thin plate with said support substrate, a burr, which
is brought about on said thin plate due to said stamping, is
directed outwardly to produce said master device block.

ABSTRACT OF THE DISCLOSURE

A piezoelectric/electrostrictive device comprises a pair of mutually opposing thin plate sections, a movable section, and a fixation section for supporting the thin plate sections and the movable section; piezoelectric/electrostrictive elements arranged on at least one thin plate sections of the pair of thin plate sections; and a hole formed by both inner walls of the pair of thin plate sections, an inner wall of the movable section, and an inner wall of the fixation section, wherein the pair of thin plate sections are made of metal. Accordingly, it is possible to realize a long life time of the device, increase the displacement of the movable section, and realize a high speed (realize a high resonance frequency). Further, it is possible to improve the handling performance of the device and the performance for attaching a part to the movable section or the performance for fixing the device.

FIG. 1


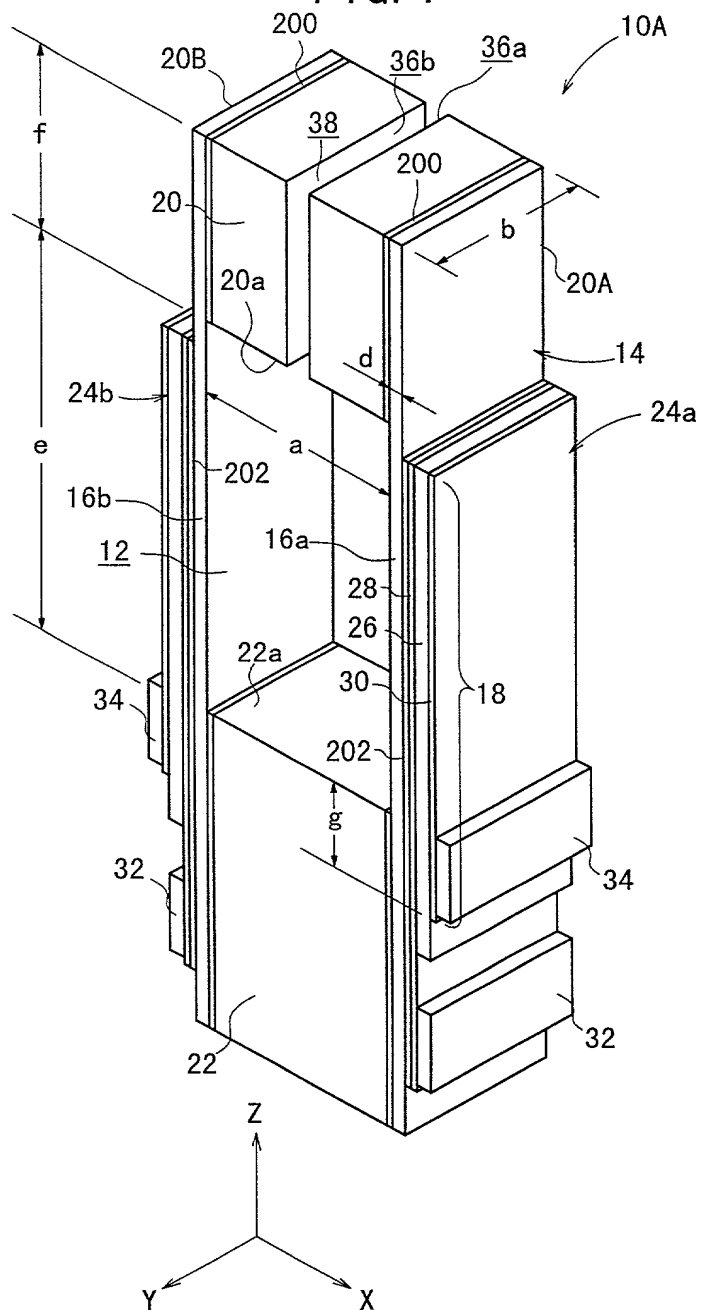


FIG. 2

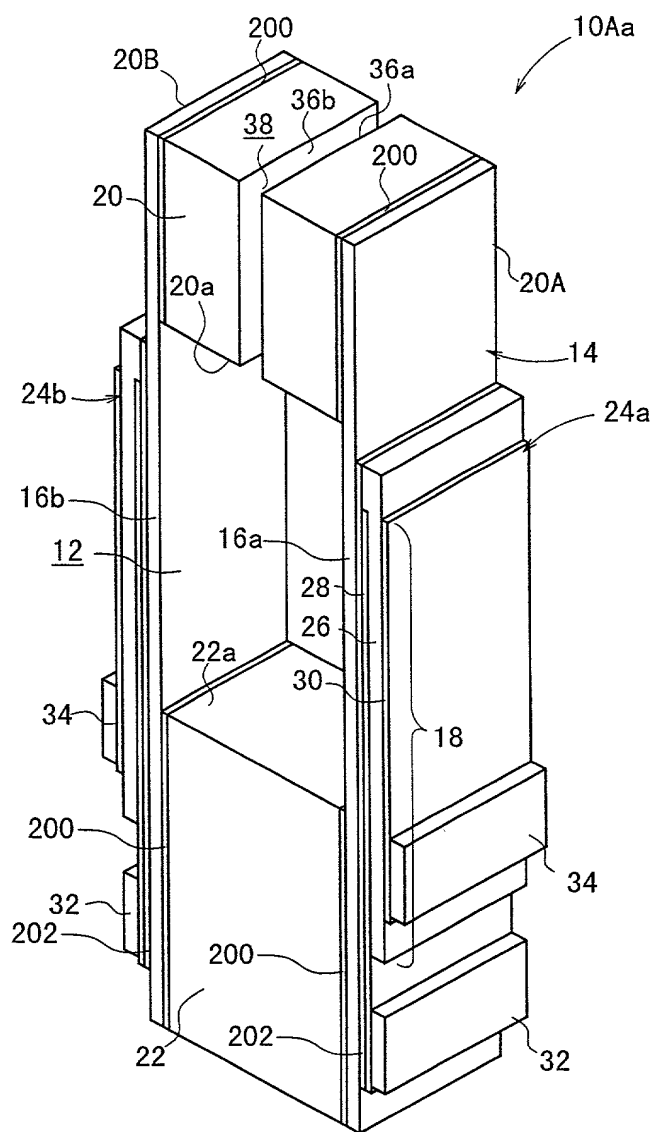

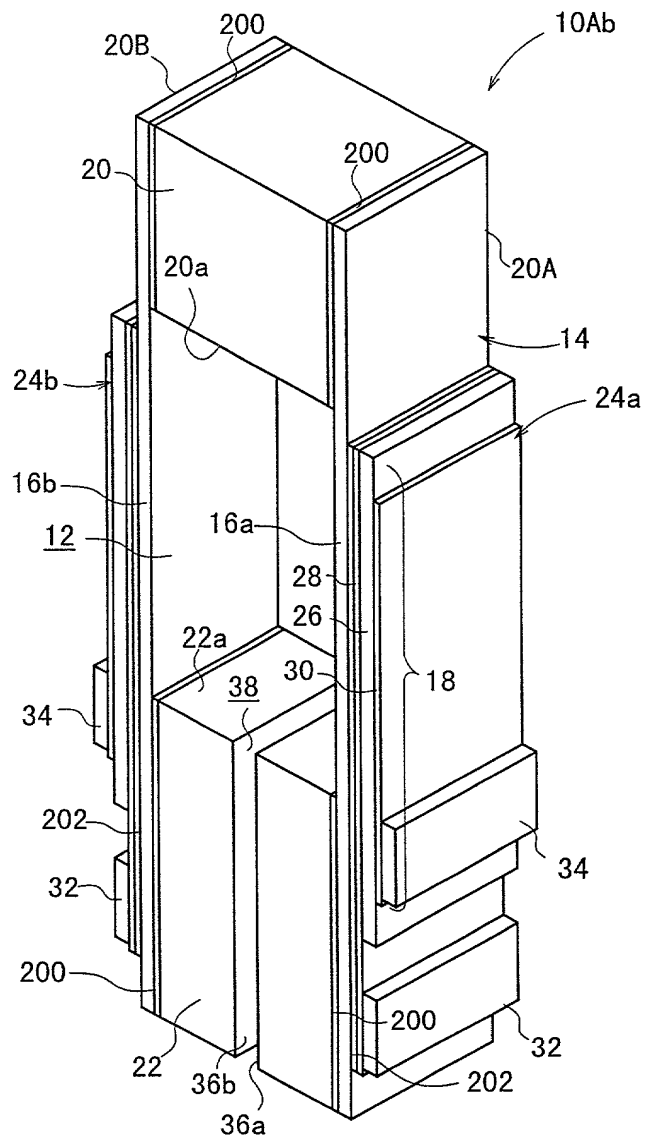
[illegible]

FIG. 4


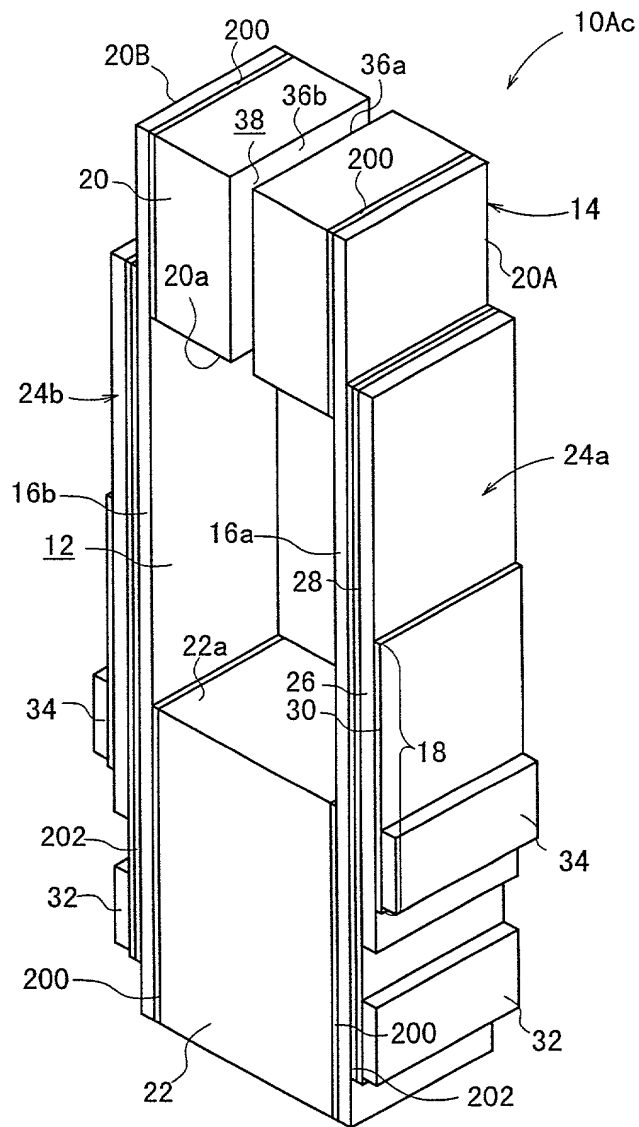


FIG. 5

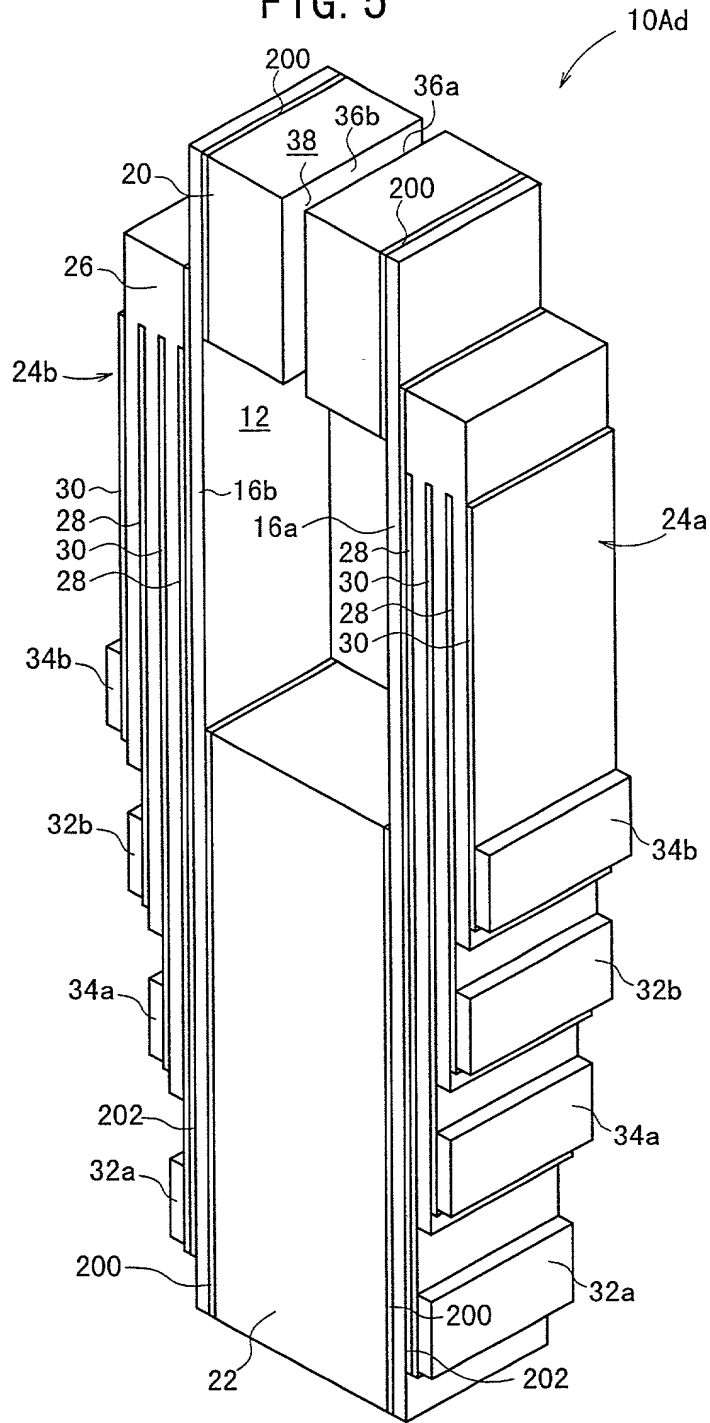

008260" 69024560

FIG. 7

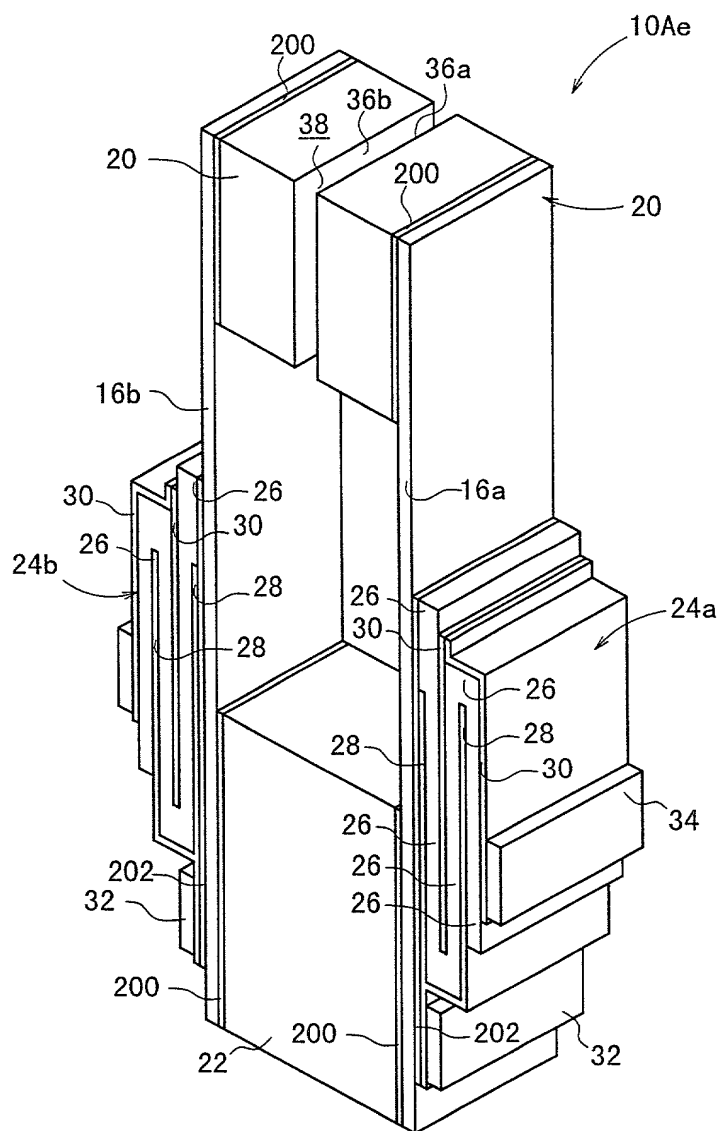


FIG. 8

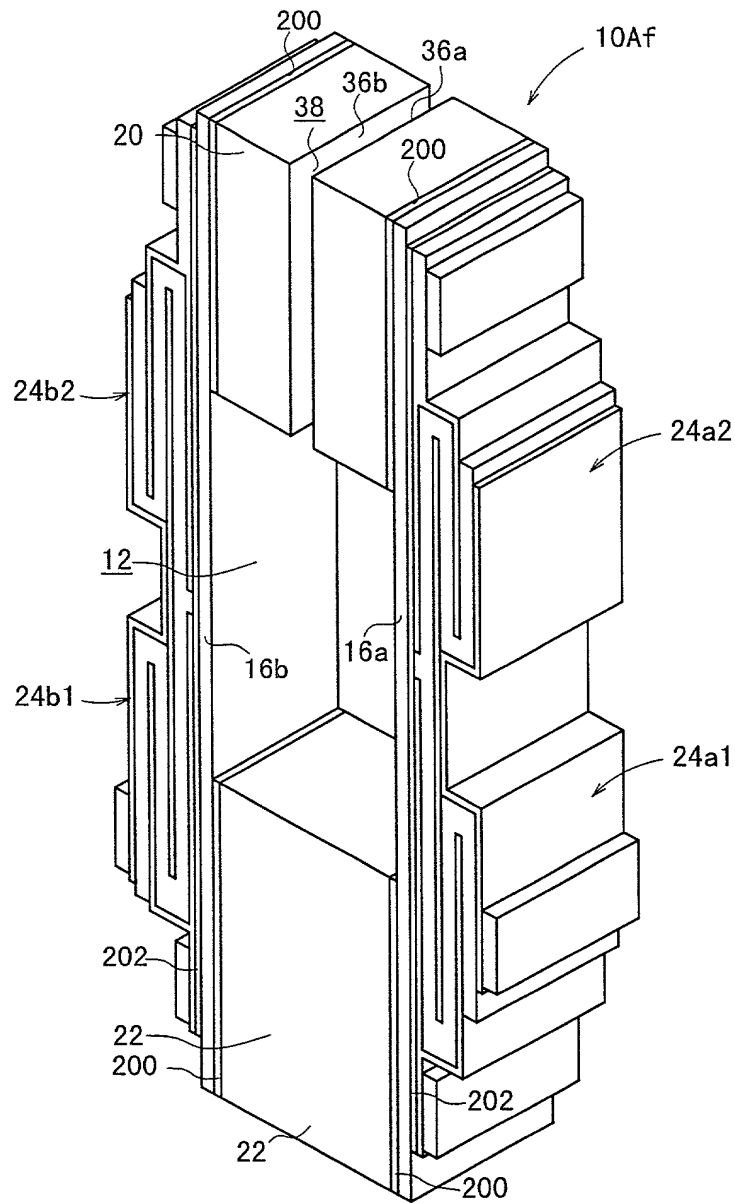


FIG. 10

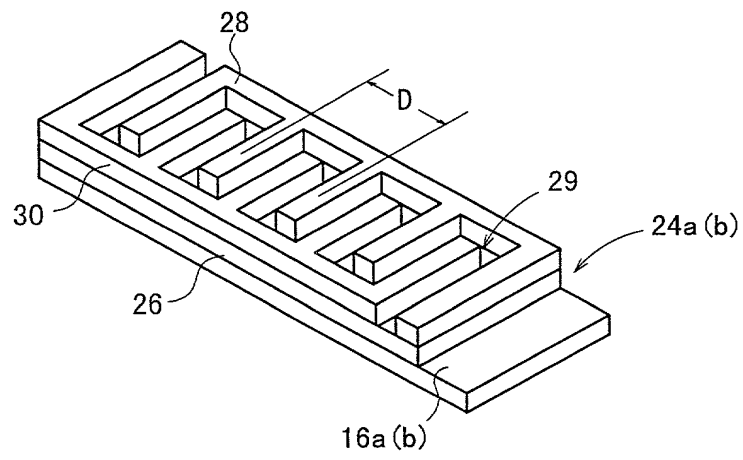


FIG. 12

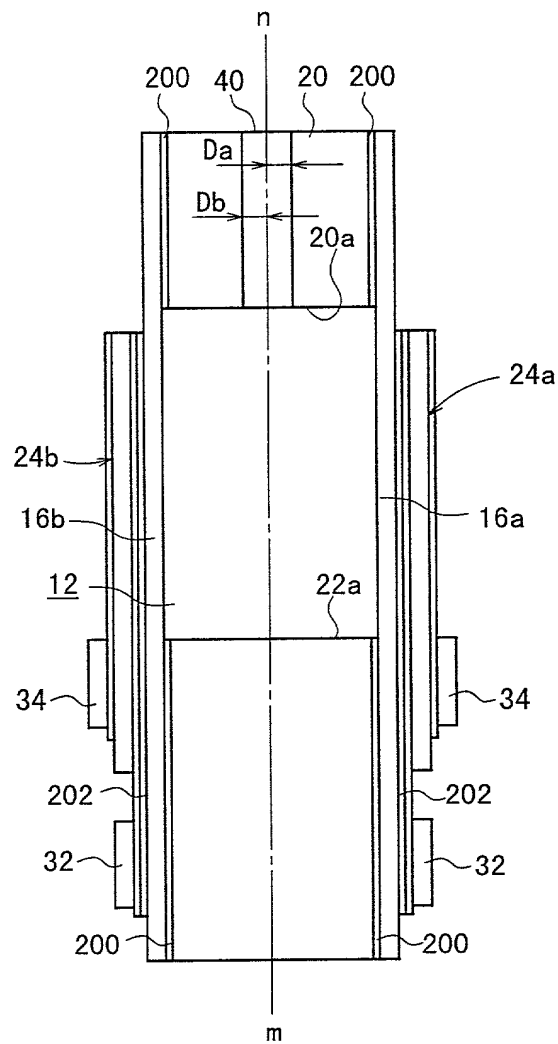


FIG. 13A

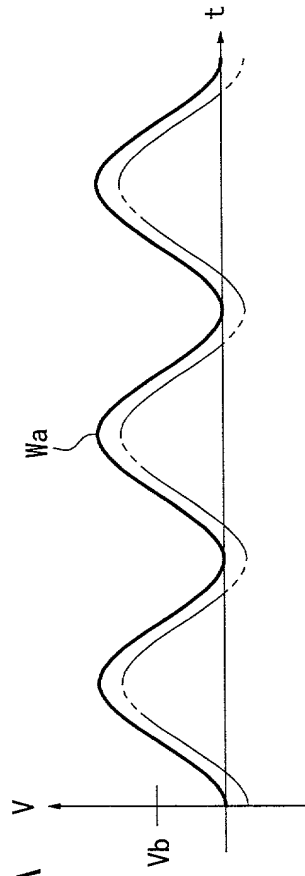


FIG. 13B

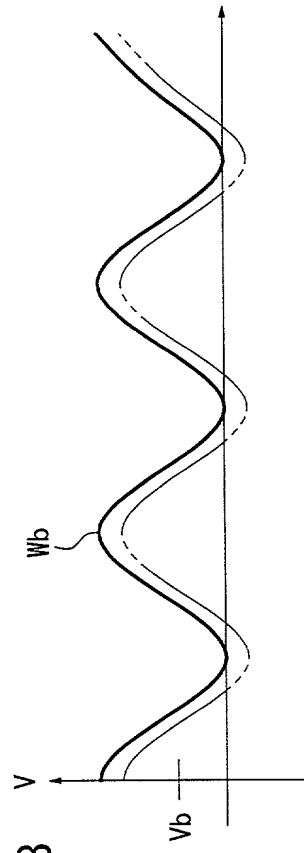


FIG. 14

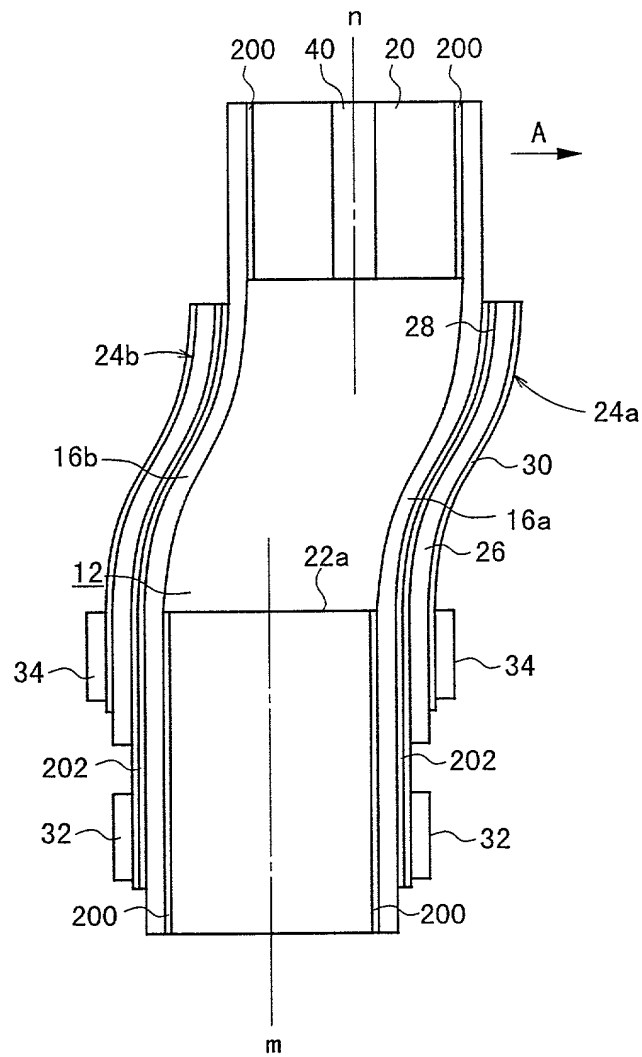


FIG. 16A

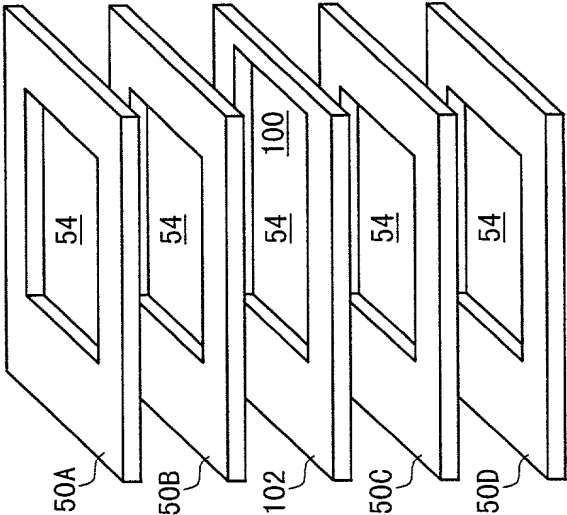


FIG. 16B

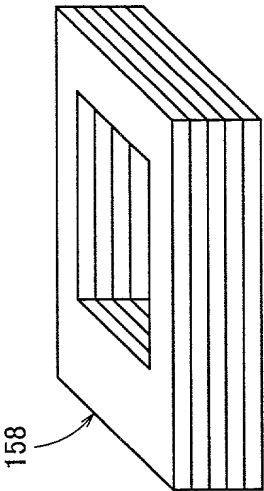


FIG. 17B

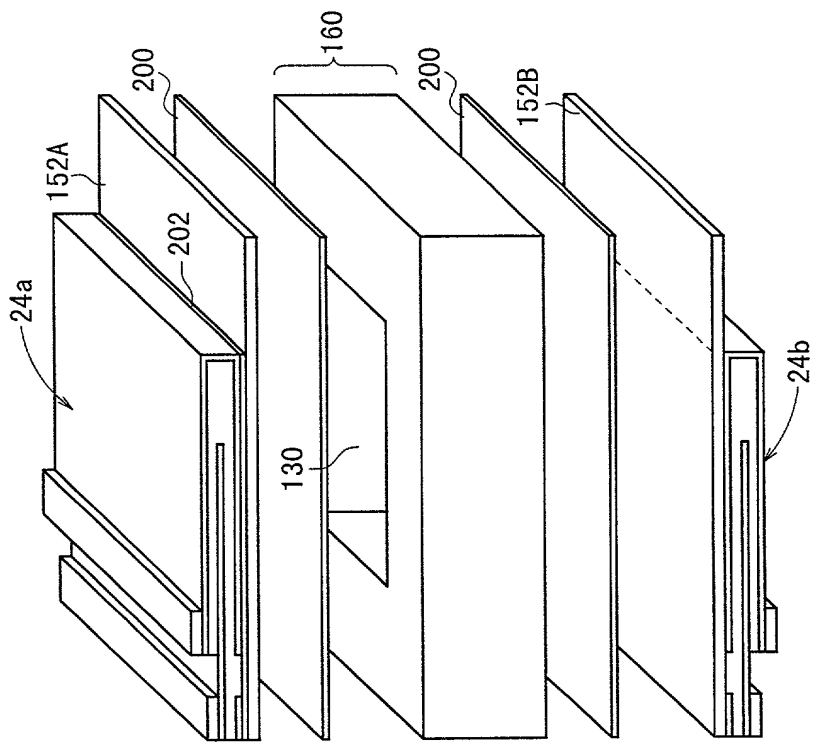


FIG. 17A

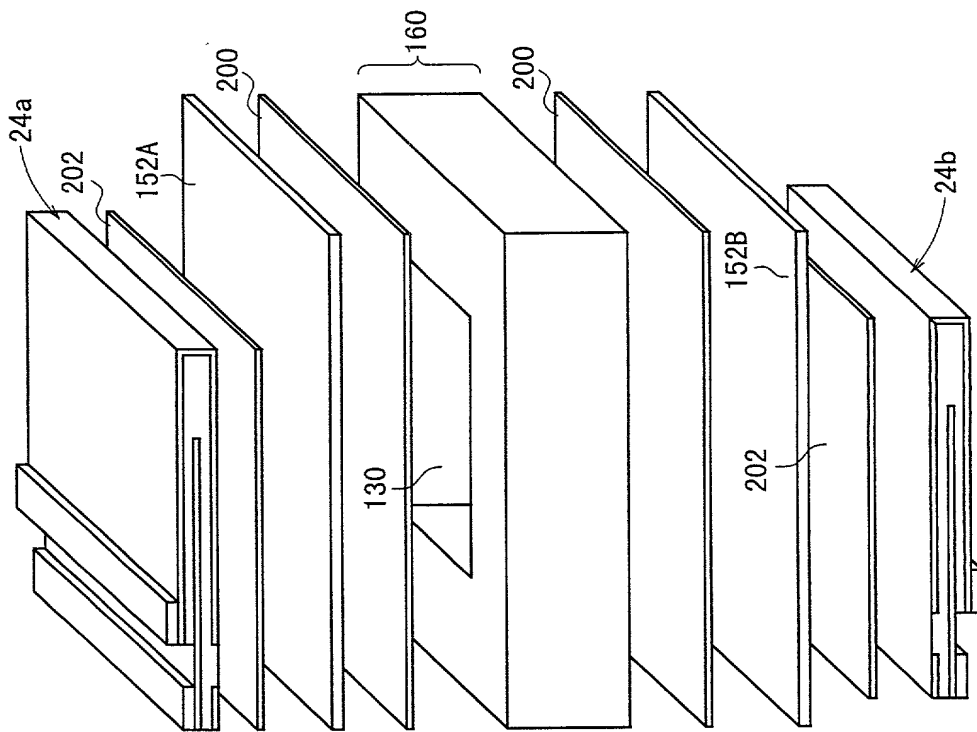


FIG. 18

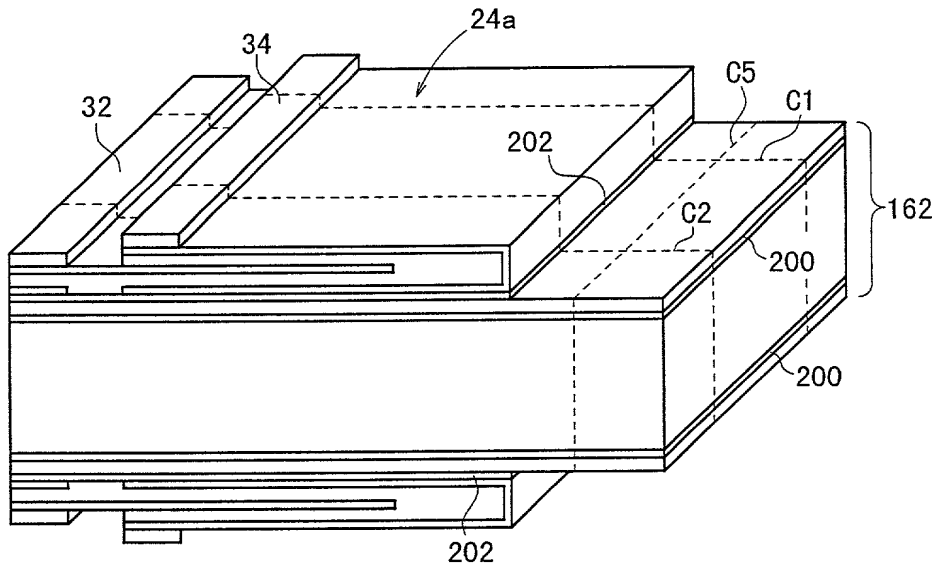


FIG. 19

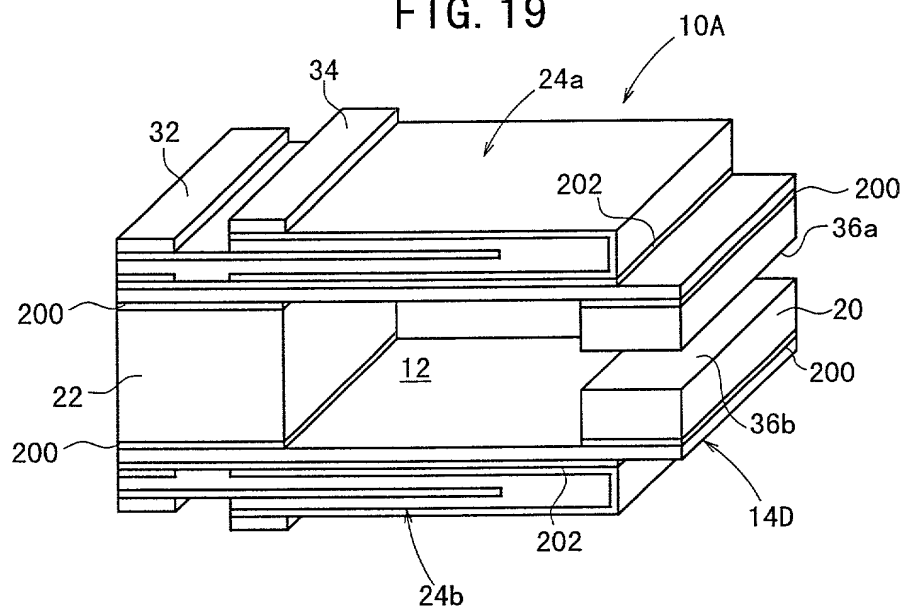


FIG. 20A

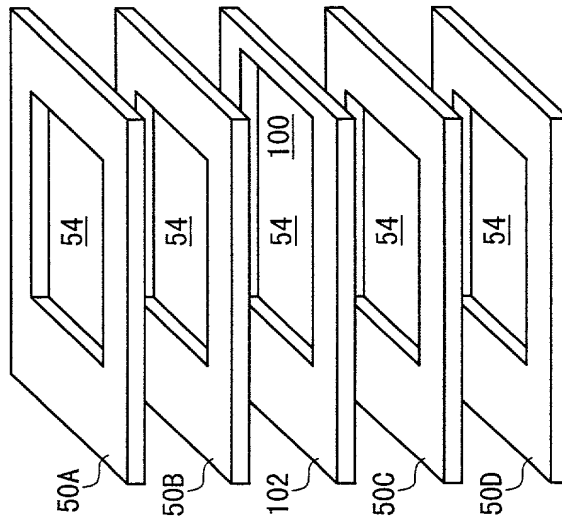


FIG. 20B

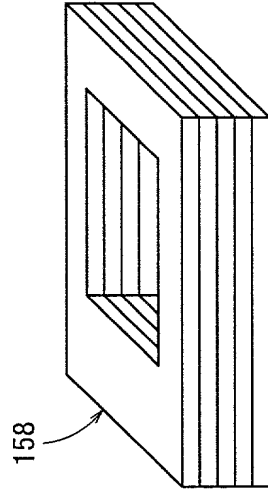


FIG. 21A

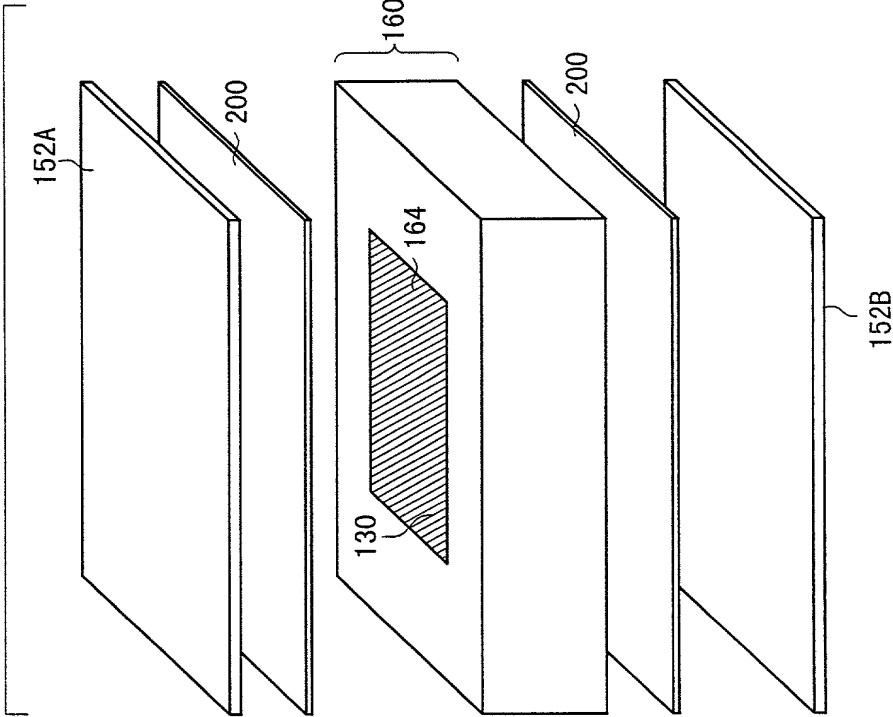


FIG. 21B

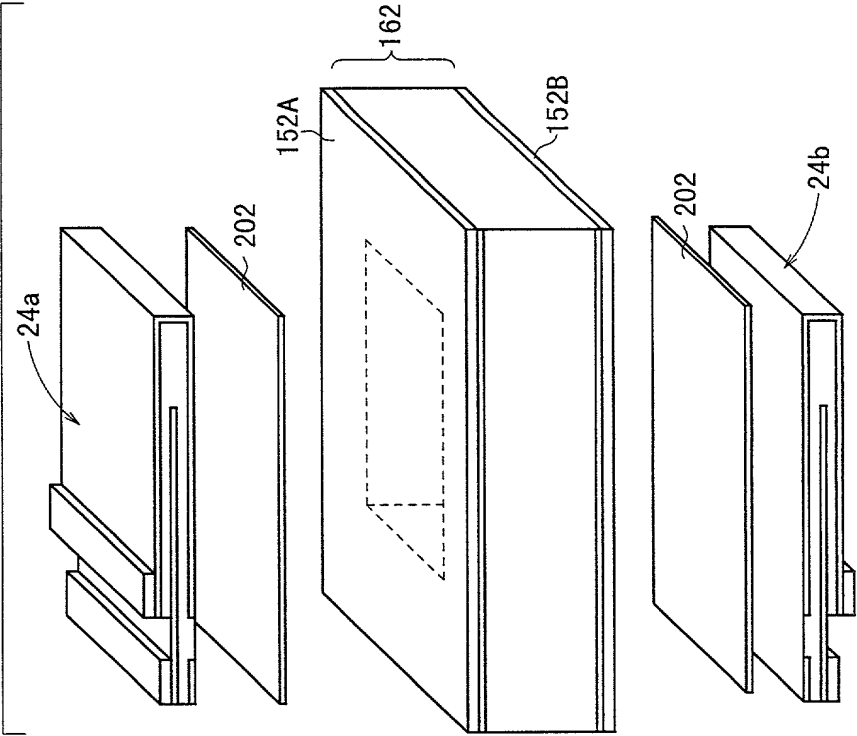


FIG. 22

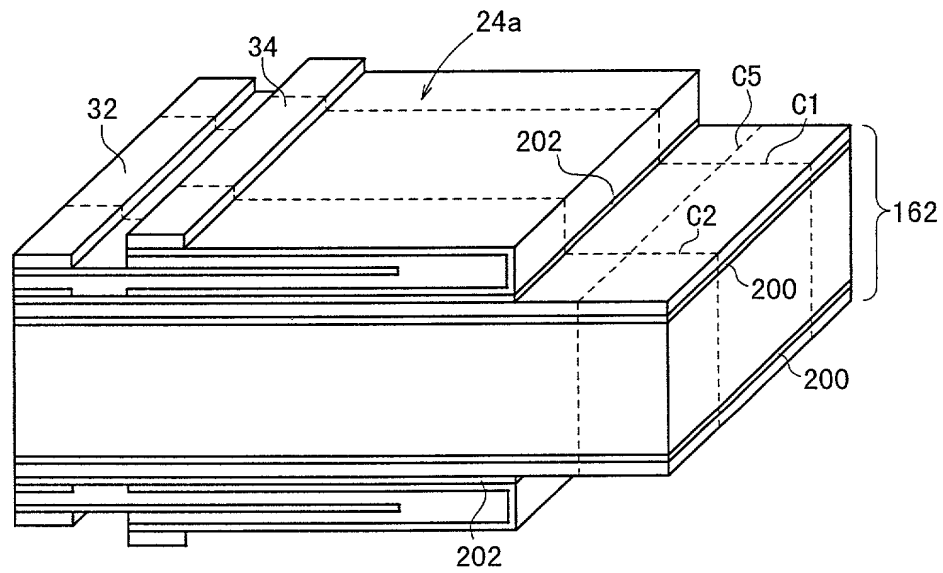


FIG. 23

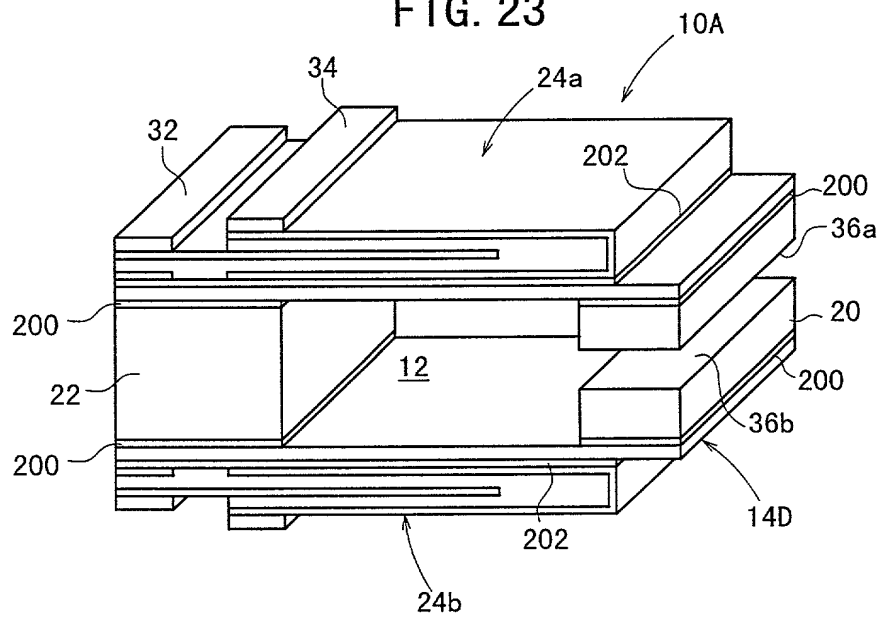


FIG. 24

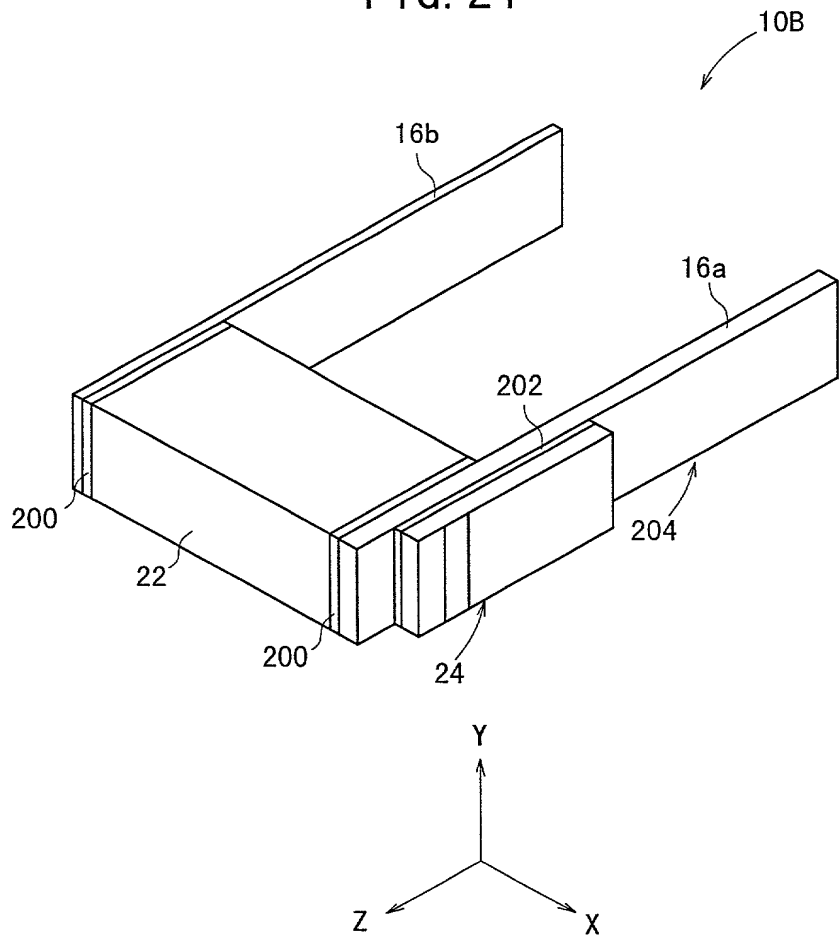


FIG. 25

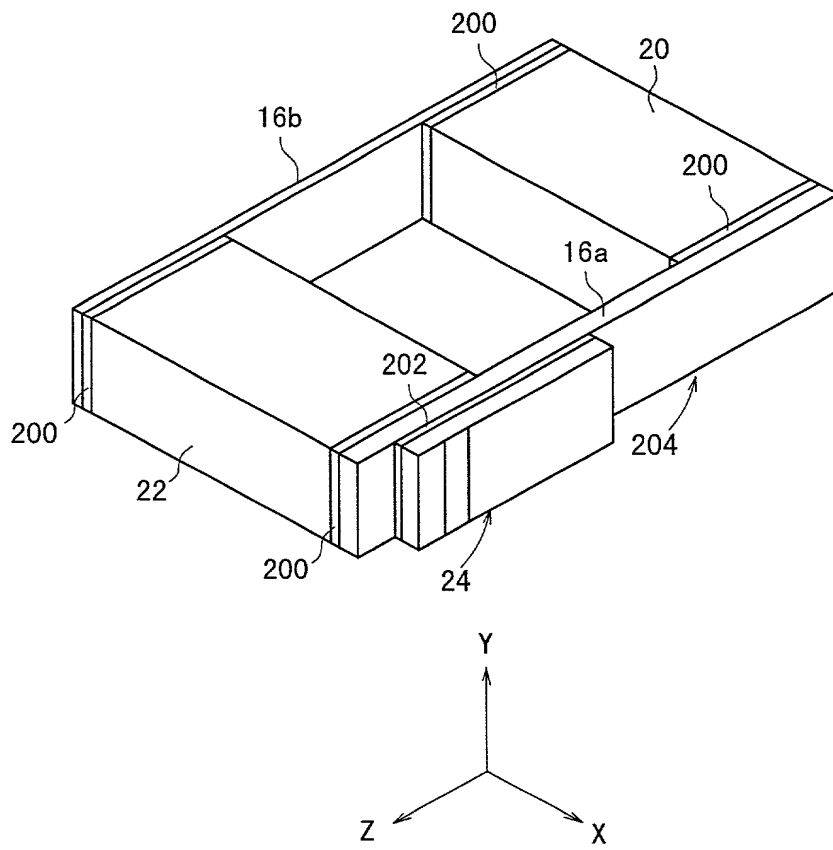


FIG. 26

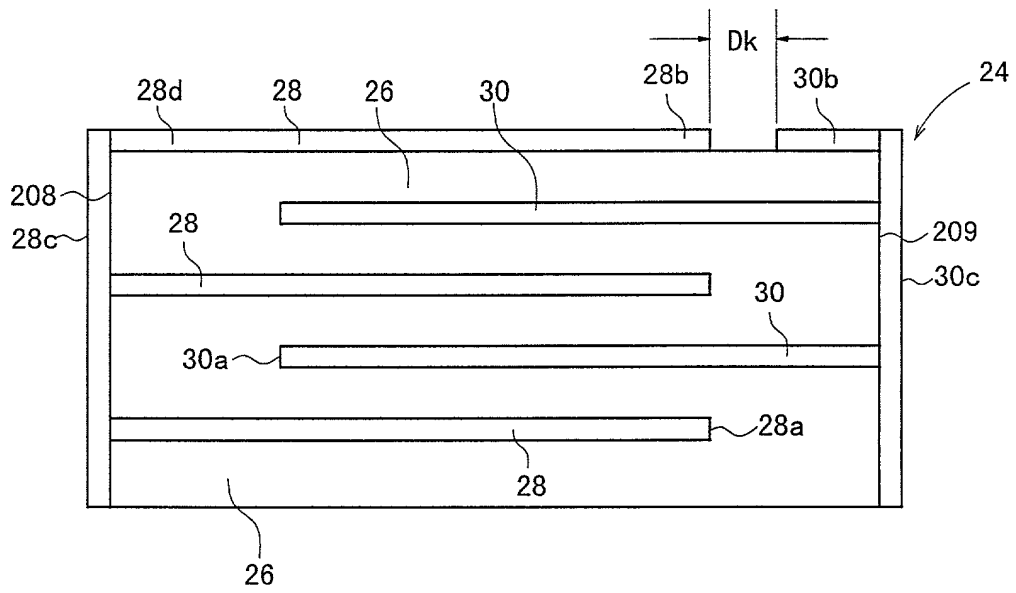


FIG. 27

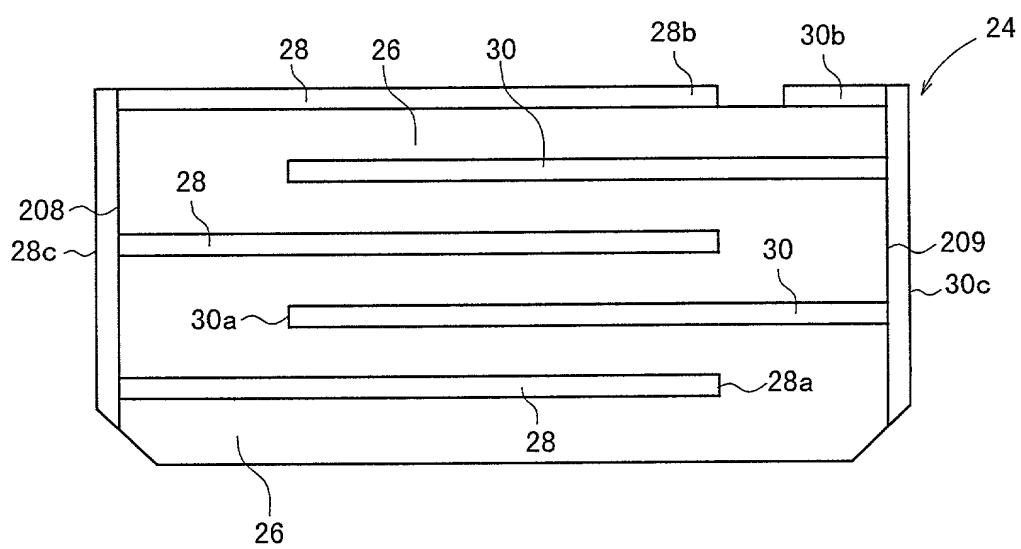


FIG. 28

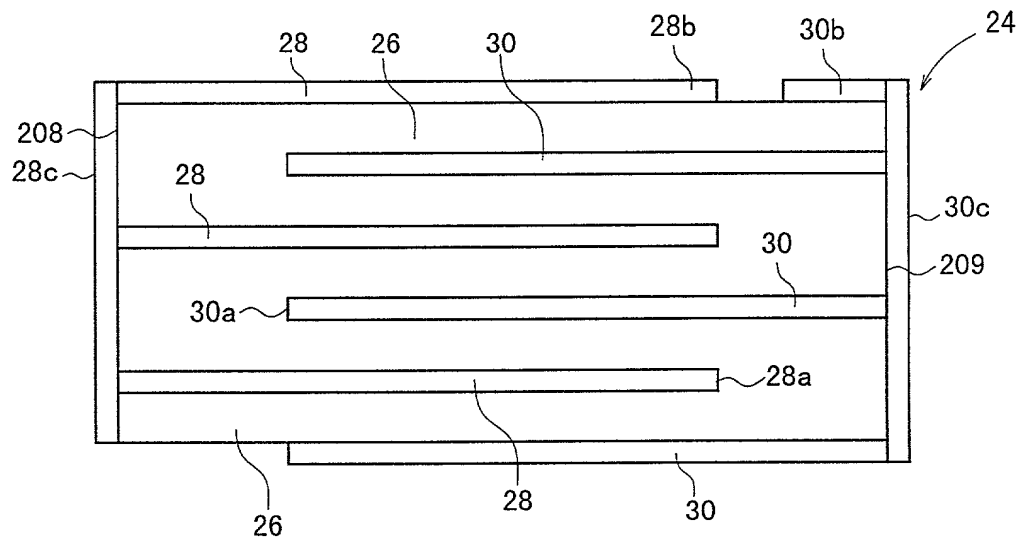


FIG. 29

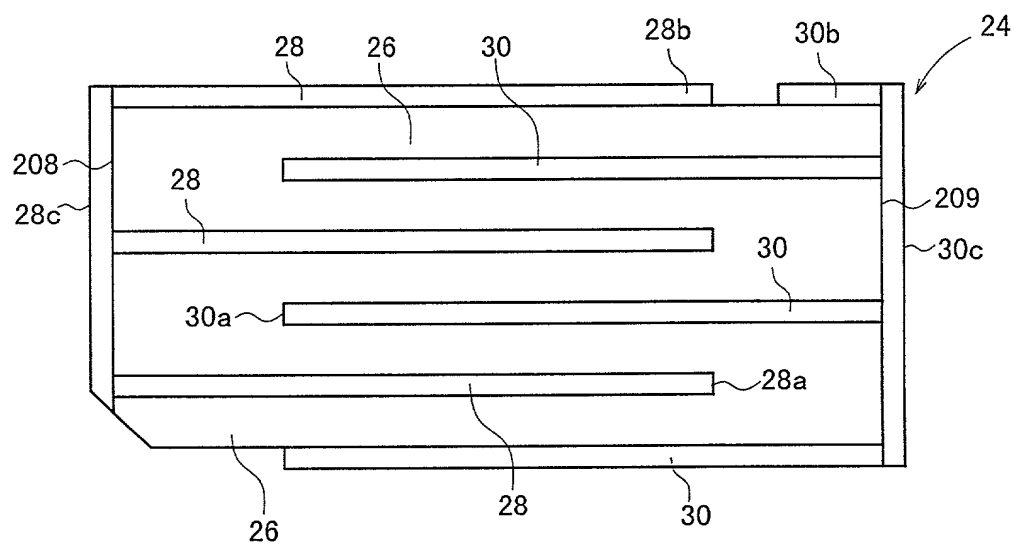


FIG. 30

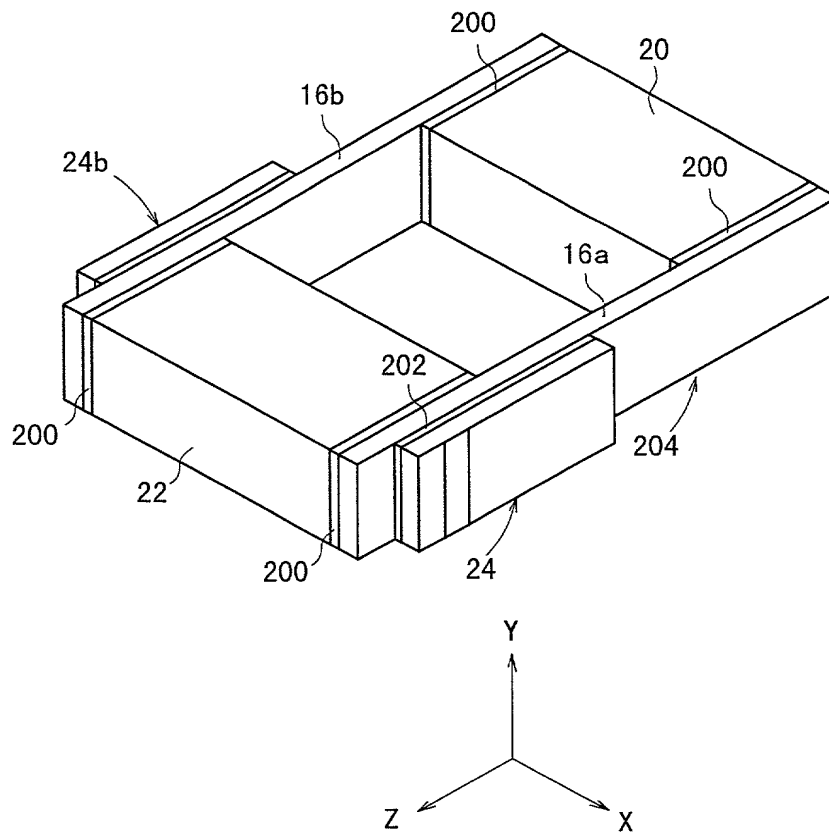


FIG. 31

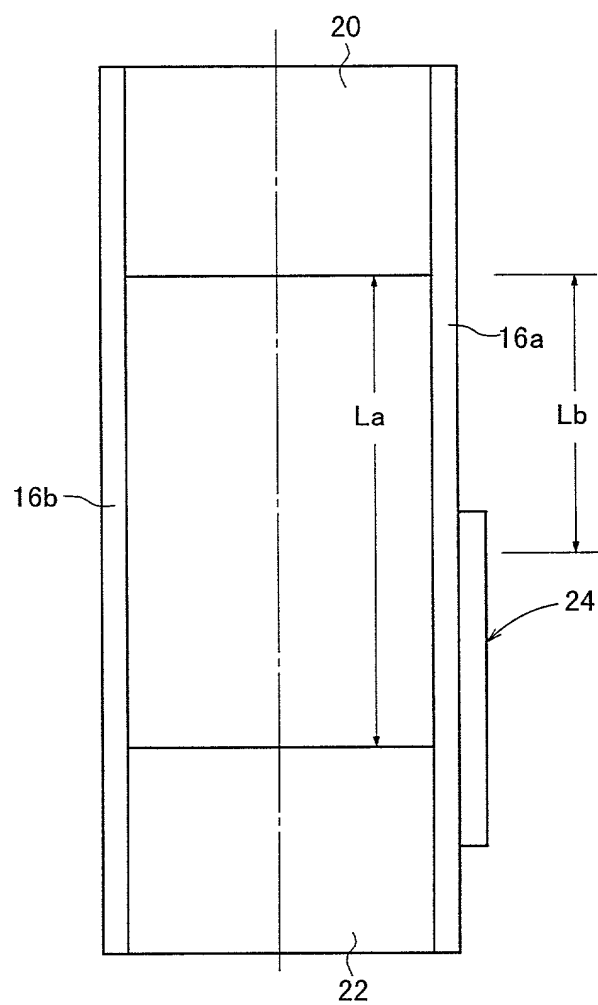
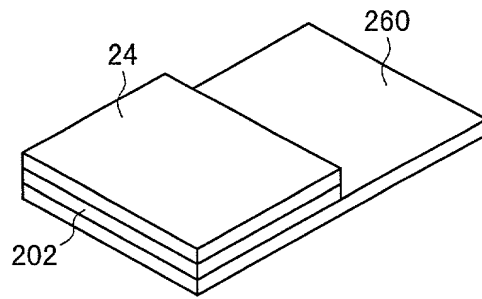


FIG. 34




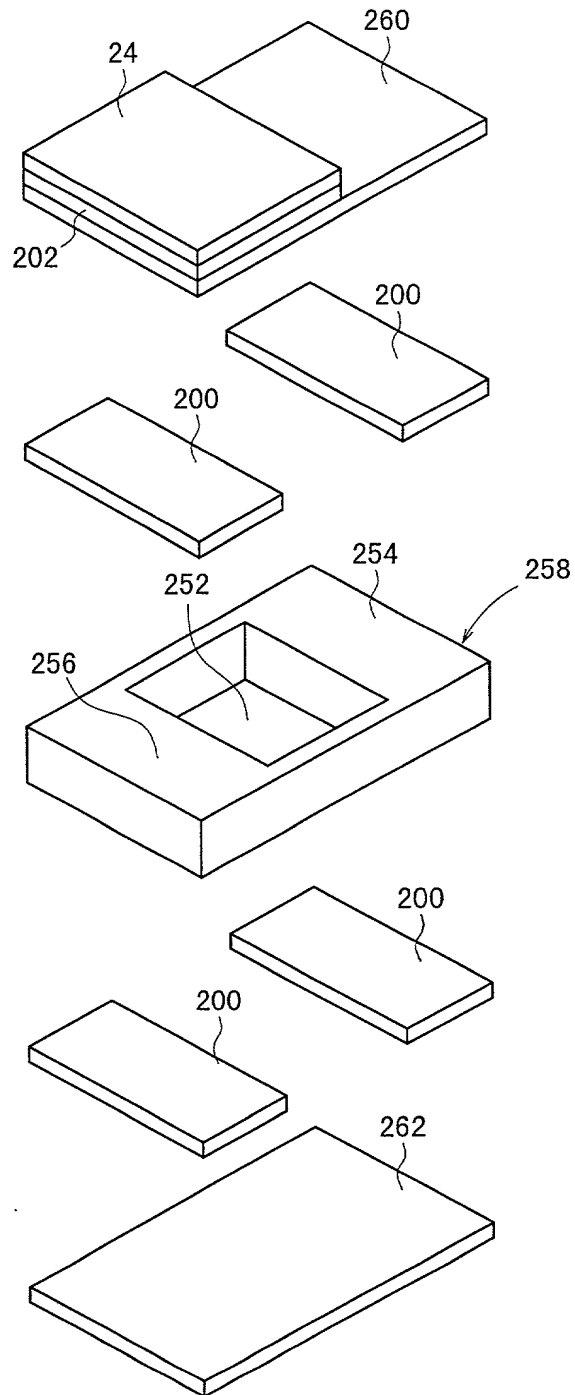


FIG. 36

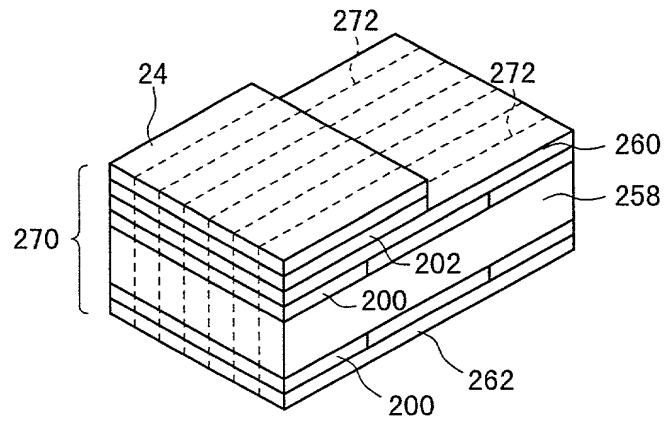

008250" 6902/960

This exploded perspective view shows the assembly of a multi-layered rectangular component. The components are labeled as follows:

- 260**: A large rectangular plate at the top.
- 200**: Two smaller rectangular plates positioned below 260.
- 250 (258)**: A central rectangular frame with a square opening. It includes labels **252** for the inner walls and **256** for the outer walls.
- 200**: Two more rectangular plates positioned below the central frame.
- 262**: A large rectangular plate at the bottom.

FIG. 38

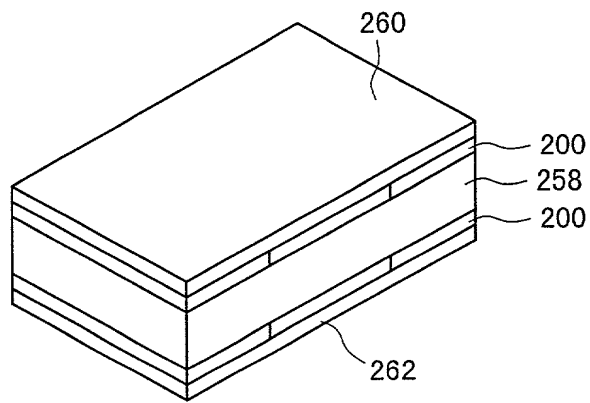


FIG. 39


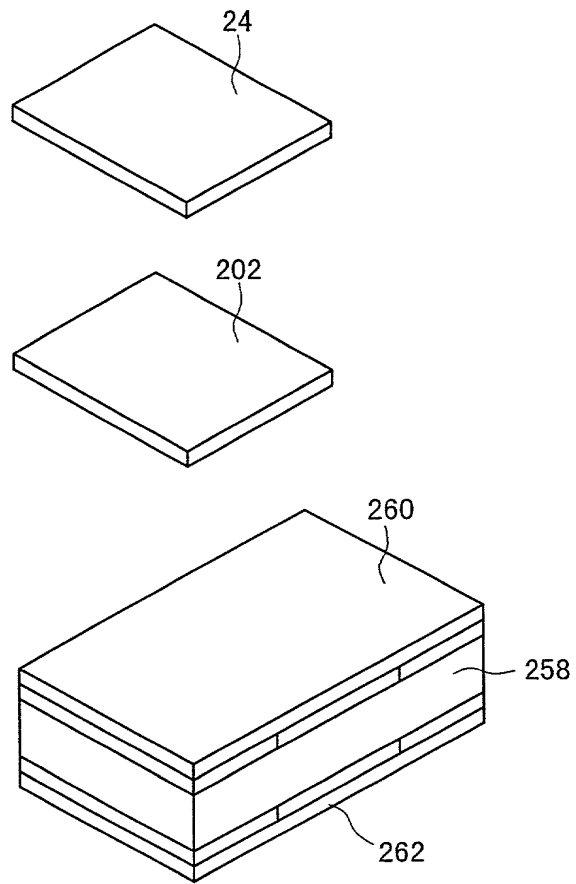


FIG. 40

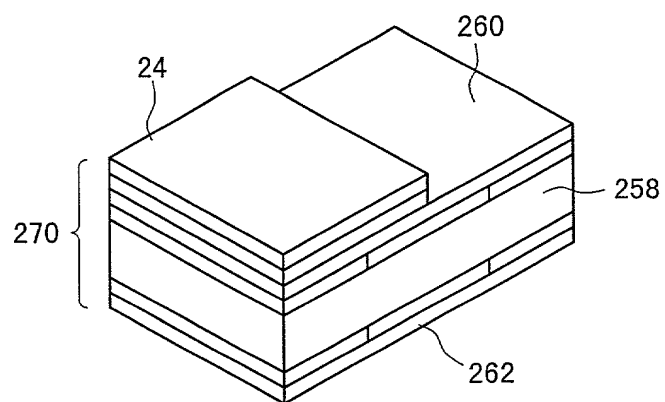

1. 10^{-1} 2. 10^{-2} 3. 10^{-3} 4. 10^{-4} 5. 10^{-5} 6. 10^{-6} 7. 10^{-7} 8. 10^{-8} 9. 10^{-9} 10. 10^{-10} 11. 10^{-11} 12. 10^{-12} 13. 10^{-13} 14. 10^{-14} 15. 10^{-15} 16. 10^{-16} 17. 10^{-17} 18. 10^{-18} 19. 10^{-19} 20. 10^{-20} 21. 10^{-21} 22. 10^{-22} 23. 10^{-23} 24. 10^{-24} 25. 10^{-25} 26. 10^{-26} 27. 10^{-27} 28. 10^{-28} 29. 10^{-29} 30. 10^{-30} 31. 10^{-31} 32. 10^{-32} 33. 10^{-33} 34. 10^{-34} 35. 10^{-35} 36. 10^{-36} 37. 10^{-37} 38. 10^{-38} 39. 10^{-39} 40. 10^{-40} 41. 10^{-41} 42. 10^{-42} 43. 10^{-43} 44. 10^{-44} 45. 10^{-45} 46. 10^{-46} 47. 10^{-47} 48. 10^{-48} 49. 10^{-49} 50. 10^{-50} 51. 10^{-51} 52. 10^{-52} 53. 10^{-53} 54. 10^{-54} 55. 10^{-55} 56. 10^{-56} 57. 10^{-57} 58. 10^{-58} 59. 10^{-59} 60. 10^{-60} 61. 10^{-61} 62. 10^{-62} 63. 10^{-63} 64. 10^{-64} 65. 10^{-65} 66. 10^{-66} 67. 10^{-67} 68. 10^{-68} 69. 10^{-69} 70. 10^{-70} 71. 10^{-71} 72. 10^{-72} 73. 10^{-73} 74. 10^{-74} 75. 10^{-75} 76. 10^{-76} 77. 10^{-77} 78. 10^{-78} 79. 10^{-79} 80. 10^{-80} 81. 10^{-81} 82. 10^{-82} 83. 10^{-83} 84. 10^{-84} 85. 10^{-85} 86. 10^{-86} 87. 10^{-87} 88. 10^{-88} 89. 10^{-89} 90. 10^{-90} 91. 10^{-91} 92. 10^{-92} 93. 10^{-93} 94. 10^{-94} 95. 10^{-95} 96. 10^{-96} 97. 10^{-97} 98. 10^{-98} 99. 10^{-99} 100. 10^{-100}




FIG. 42

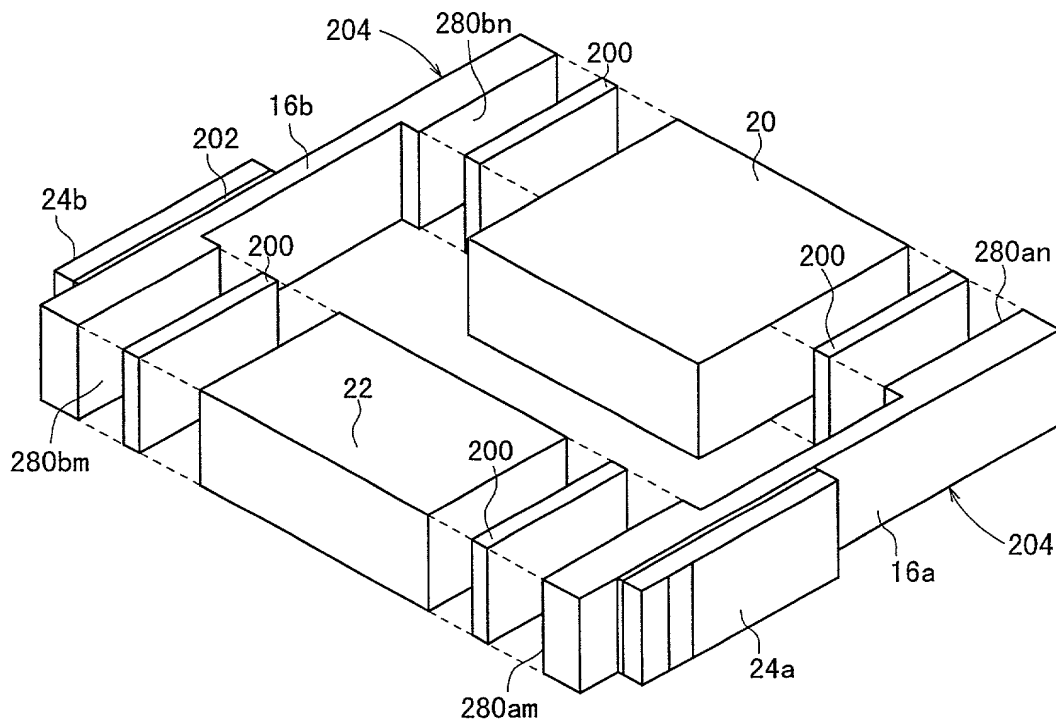


FIG. 43

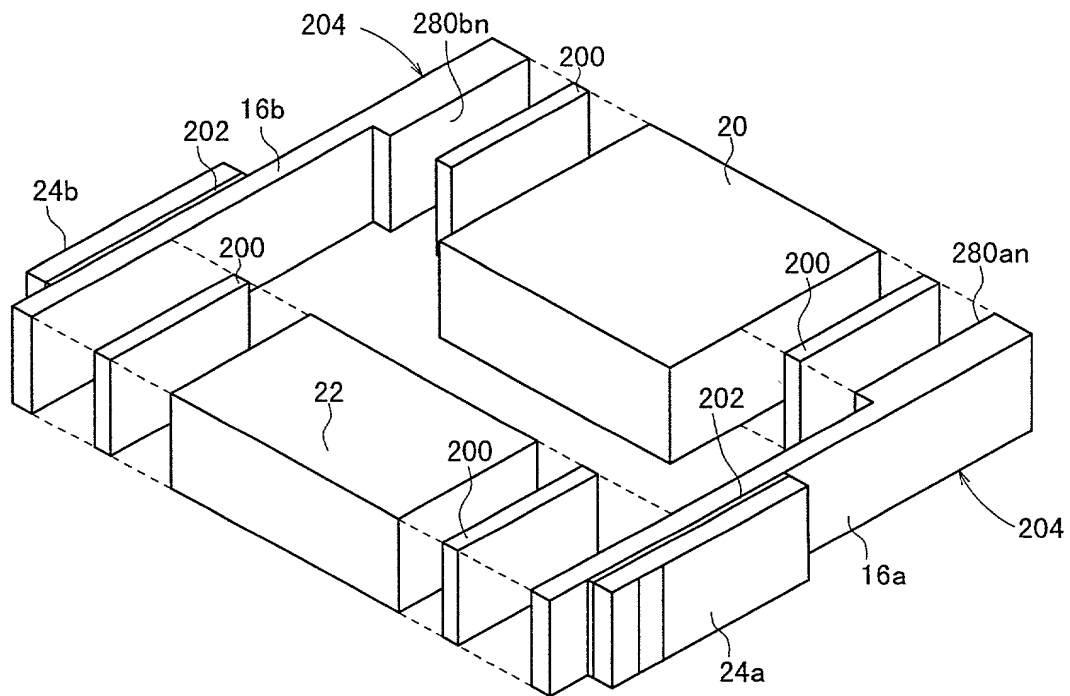


FIG. 44


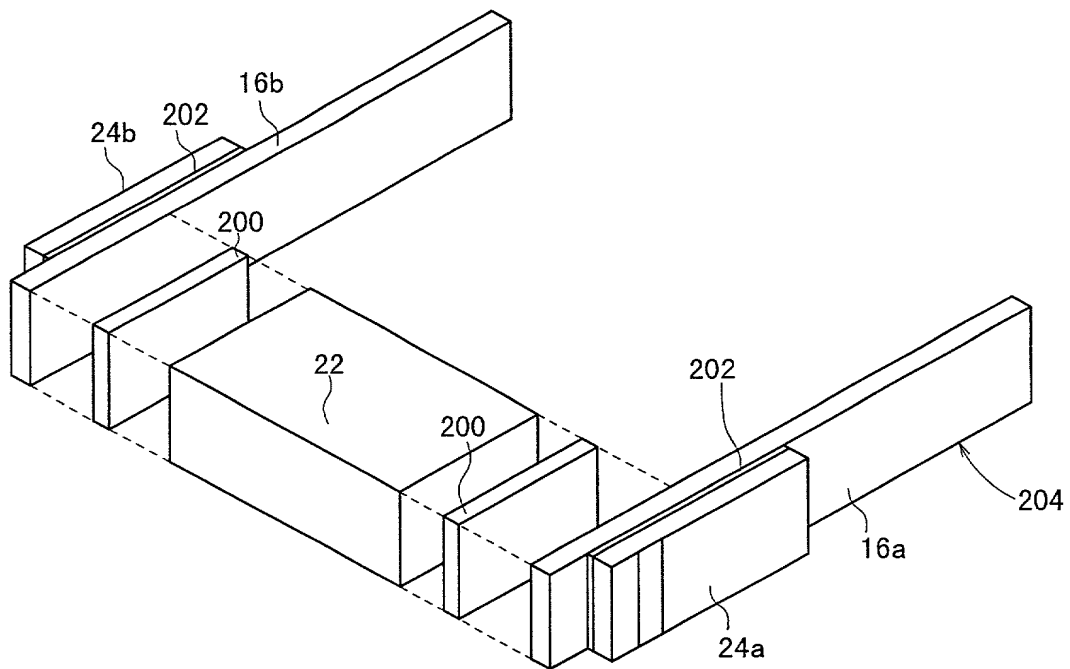


FIG. 45

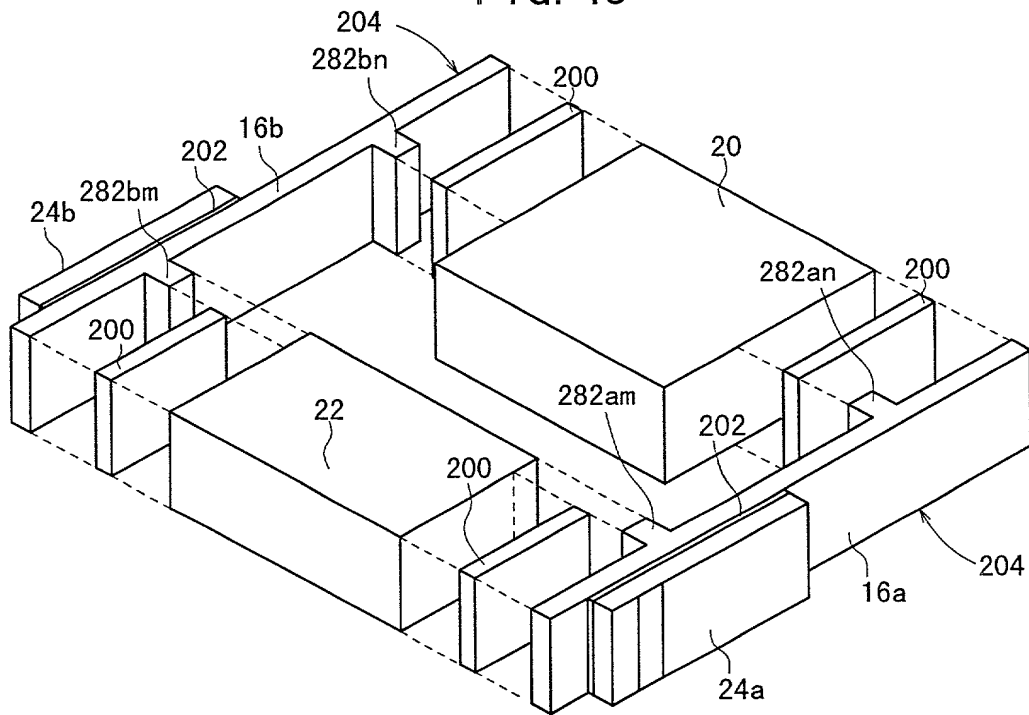


[illegible]

FIG. 47

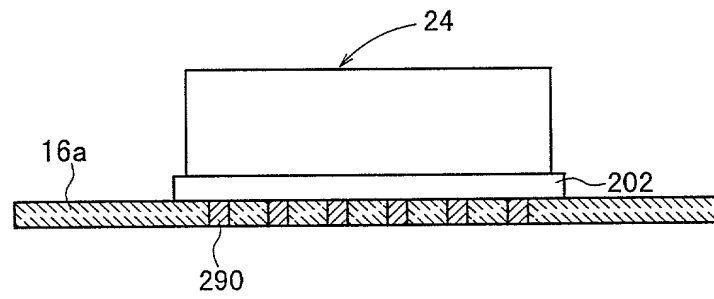


FIG. 48

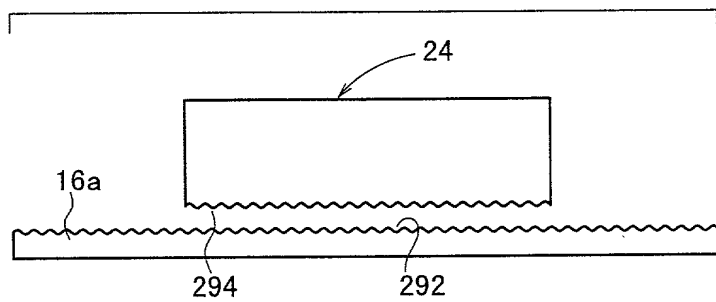


FIG. 49

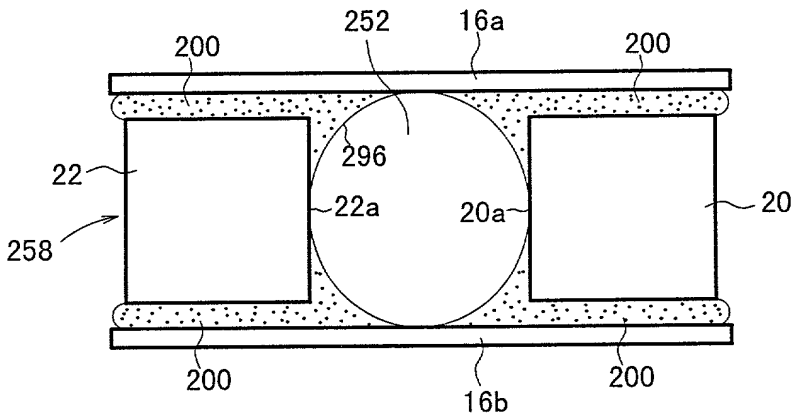


FIG. 50

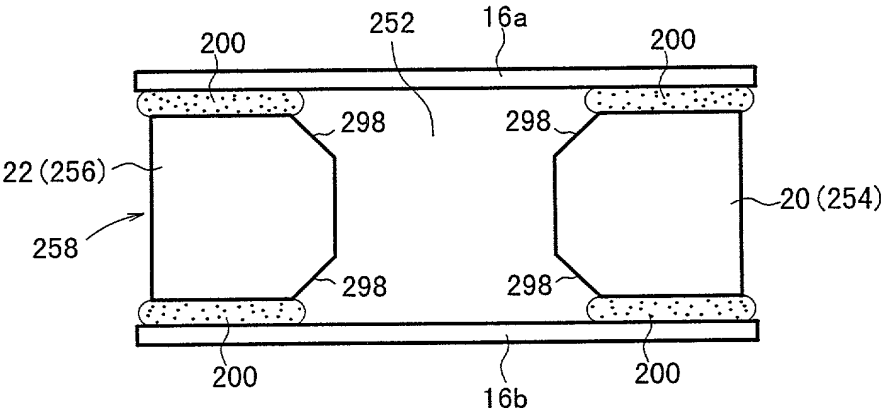


FIG. 51

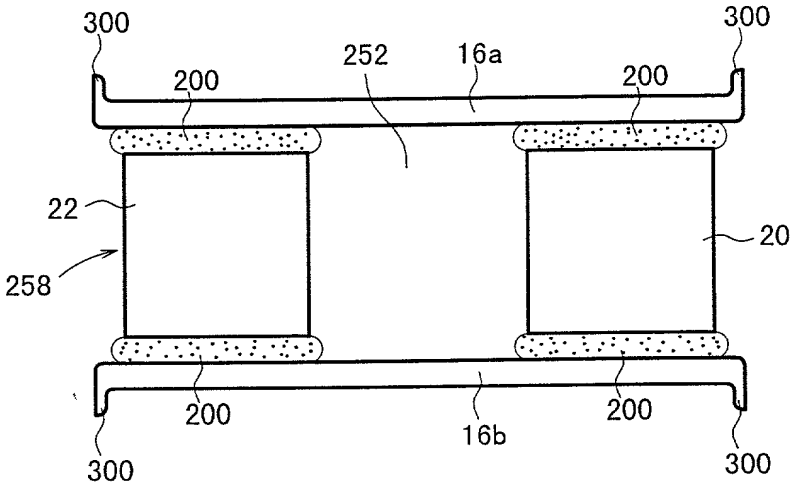


FIG. 53

